


Application of Hydrologic Methods in Maryland

Fourth Edition, July 2016



Larry Hogan, Governor

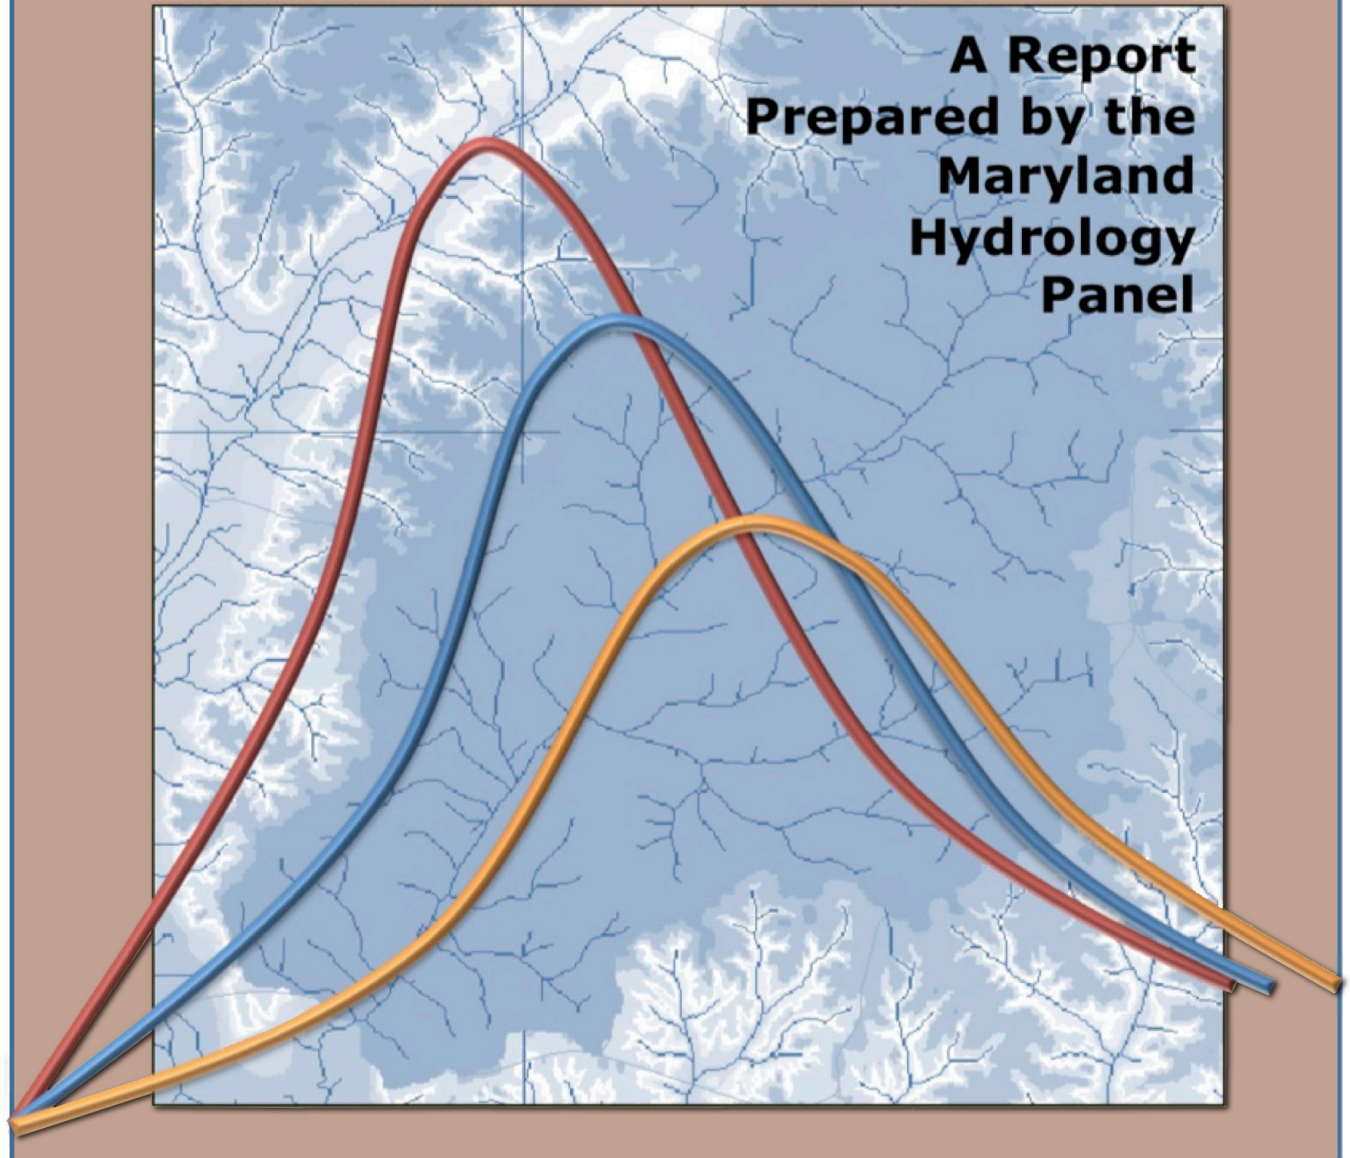

Note on Document Format

This document is formatted for two-sided printing: odd-numbered pages on the right, and even-numbered pages on the left.

The center margin is wider than the outside margin to accommodate binding or three-hole punching.

The page number is placed on the lower outer corner of each page.

Each new chapter or section begins on a right-hand page. Occasionally, a blank page is inserted to enforce this organization. In such cases, the page includes the text “Blank page inserted to preserve left-right pagination format” to reassure the user that a blank page has not been printed by accident.

Users who wish to print the Report are encouraged to use two-sided printing.



Maryland
Department of
the Environment

July 2016

Subject: *Application of Hydrologic Methods in Maryland*, Fourth Edition, July 2016

Users of this Manual:

On behalf of the State Highway Administration (SHA) and the Maryland Department of the Environment (MDE), we are delighted to endorse and recommend the use of this manual as it applies to hydrologic practices for State of Maryland projects. It is important to note that the manual will be the required criteria for all hydrologic analyses related to SHA bridge and highway design and is recommended for use by other State and local agencies.

This manual is intended to aid the practitioner in the prediction of peak flow rates and flood hydrographs for Maryland streams as well as to offer techniques and tools that will improve the results of rainfall-runoff computer models. The procedures outlined in this manual guide the user toward the development of more reliable and consistent watershed models that better reflect the historic stream gage data for the Maryland region. This manual is to be used in conjunction with State and federal technical manuals, computer user manuals, and technical papers.

We recognize that the technology of hydrology computer programs, geographic information systems software and databases, and remote sensing data collection are continually being advanced. Although parts of this manual will be updated periodically to reflect current technology, data, and methods, it contains many guidelines, recommendations, limitations on procedures, analysis philosophies, and computational tools that will be valuable for the practitioner even as the science progresses.

We appreciate the effort of all who participated in the preparation and review of this manual and pledge our commitment to the continual improvement of the science and applications of hydrology in the State of Maryland.

Very truly yours,

A handwritten signature in blue ink, appearing to read 'Gregory I. Slater', is written over a horizontal line.

Gregory I. Slater, Deputy Administrator
Chief Engineer for Planning, Engineering,
Real Estate and Environment
State Highway Administration
Department of Transportation

A handwritten signature in blue ink, appearing to read 'Lynn Y. Buhl', is written over a horizontal line.

Lynn Y. Buhl, Director
Water Management Administration
Department of the Environment

Dedication

Michael J. Casey (1975 – 2015)

This edition of the Hydrology Panel report is dedicated to Michael J. Casey, PhD., PE. Mike was a member of this panel from 2006-2013. He served as the overall editor of the 3rd edition of the Hydrology Panel report completed in 2010.

A creative and expert programmer, Mike played a primary role in translating the concepts of the original GISHydro program developed by Dr. Robert Ragan into the ArcView GIS environment. Mike's clever ability to weave together software from multiple sources brought "unity of place" to GISHydro2000, allowing a user of this software to perform a complete hydrologic analysis at any location in Maryland without leaving the GIS software environment. This automated hydrology software has been used extensively throughout Maryland since 2000 and has saved the Maryland taxpayers millions of dollars.



Mike also contributed to the GISHydro effort as a teacher and researcher. He co-taught numerous GISHydro training workshops held around the state, teaching hundreds of students on all matters related to the modeling enterprise from GIS basics, to slick computer tricks, to high-level hydrologic concepts. Mike's MS thesis entitled "The effect of watershed subdivision on simulated hydrologic response using the NRCS TR-20 Model" (1999) later served as the inspiration to a separate journal article (Casey et al. 2015), illustrating the sensitivity of peak flows to the degree of watershed subdivision and providing guidance on how to appropriately subdivide a watershed for accurate modeling results.

Above all, Mike was a good friend and colleague to all who served on the Hydrology Panel and to many others at the Maryland State Highway Administration with whom he frequently interacted. Mike's sense of humor, natural curiosity, and genuine interest in others endeared him to all who had the privilege to learn and work with him.

Citations:

Casey, M.J. (1999). "The effect of watershed subdivision on simulated hydrologic response using the NRCS TR-20 model." Master's thesis, Dept. of Civil and Environmental Engineering, Univ. of Maryland, College Park, MD.

Casey, M.J., J.H. Stagge, G.E. Moglen, and R.H. McCuen, (2015). "The Effects of Watershed Subdivision on Peak Discharge in Rainfall Runoff Modeling in the WinTR-20 model." *Journal of Hydrologic Engineering*, DOI: 10.1061/(ASCE)HE.1943-5584.0001188.

TABLE OF CONTENTS

| | |
|---|-------------|
| LIST OF FIGURES..... | v |
| LIST OF TABLES..... | vii |
| EXECUTIVE SUMMARY..... | viii |
| THE MARYLAND HYDROLOGY PANEL..... | xi |
| GLOSSARY OF EQUATION VARIABLES..... | xii |
| 1 INTRODUCTION..... | 1 |
| 1.1 RECOMMENDATIONS..... | 2 |
| 1.1.1 Overview of the Modeling Process and the Calibration Requirements..... | 3 |
| 1.1.2 Issues Concerning the Selection of WinTR-20 Input Parameters..... | 6 |
| 1.2 RATIONALE..... | 10 |
| 1.3 NEED FOR CONTINUING RESEARCH..... | 11 |
| 2 STATISTICAL METHODS FOR ESTIMATING FLOOD DISCHARGES..... | 2-1 |
| 2.1 INTRODUCTION..... | 2-1 |
| 2.2 FLOOD DISCHARGES AT GAGING STATIONS..... | 2-3 |
| 2.3 ESTIMATES FOR UNGAGED SITES NEAR A GAGING STATION 2-8 | |
| 2.4 ESTIMATES AT UNGAGED SITES..... | 2-9 |
| 2.5 FUTURE RESEARCH TO IMPROVE REGRESSION EQUATIONS..... | 2-11 |
| 3 BEHAVIOR OF THE WINTR-20 MODEL IN RESPONSE TO UNCERTAINTIES IN THE INPUT PARAMETERS..... | 3-1 |
| 3.1 OVERVIEW..... | 3-1 |
| 3.2 DRAINAGE AREA..... | 3-2 |
| 3.3 VOLUME OF RUNOFF..... | 3-4 |
| 3.4 PEAK DISCHARGE AND SHAPE OF THE RUNOFF HYDROGRAPH..... | 3-6 |
| 3.4.1 The Dimensionless Unit Hydrograph..... | 3-6 |
| 3.4.2 Time of Concentration and Lag..... | 3-8 |
| 3.4.3 Watershed Lag Method to Estimate Time of Concentration .. | 3-10 |
| 3.4.4 Estimating the Time of Concentration from Flow Path Hydraulics..... | 3-11 |
| 3.4.5 Overland Flow..... | 3-11 |
| 3.4.6 Shallow Concentrated Flow..... | 3-14 |

| | | |
|------------|--|-------------|
| 3.4.7 | Open Channel Flow | 3-14 |
| 3.4.8 | Length and Slope of Streams | 3-14 |
| 3.4.9 | Open Channel Manning Roughness Coefficient..... | 3-15 |
| 3.4.10 | Bankfull Cross Section | 3-16 |
| 3.5 | SUBDIVIDING INTO SUB-WATERSHEDS AND ROUTING | 3-19 |
| 3.5.1 | How Many Sub-watersheds | 3-19 |
| 3.5.2 | The Representative Routing Cross Section..... | 3-20 |
| 3.5.3 | Manning n for the Representative Routing Cross Section..... | 3-21 |
| 3.5.4 | Channel Routing Techniques | 3-21 |
| 3.6 | THE DESIGN STORM | 3-22 |
| 4 | CALIBRATION OF WINTR-20 WITH STATISTICAL METHODS | 4-1 |
| 4.1 | OVERVIEW | 4-1 |
| 4.2 | SIZE AND CHARACTERISTICS OF THE WATERSHED | 4-3 |
| 4.3 | UNDERSTANDING ERRORS..... | 4-4 |
| 4.3.1 | Drainage Area | 4-4 |
| 4.3.2 | Runoff Curve Number | 4-4 |
| 4.3.3 | Land Use Categories and RCN Values | 4-5 |
| 4.3.4 | Time-of-Concentration (overland/sheet flow component) | 4-6 |
| 4.3.5 | Time-of-Concentration (shallow concentrated flow component) | 4-6 |
| 4.3.6 | Time-of-Concentration (channel flow component) | 4-7 |
| 4.3.7 | Representative Reach Cross Section for Reach Routing | 4-8 |
| 4.3.8 | Reach Length | 4-8 |
| 4.3.9 | Storage at Culverts | 4-9 |
| 4.3.10 | Antecedent Runoff Condition (ARC) | 4-9 |
| 4.3.11 | Dimensionless Unit Hydrograph..... | 4-10 |
| 4.3.12 | Rainfall Tables | 4-10 |
| 4.4 | SENSITIVITY OF WINTR-20 RESULTS TO VARIATION IN INPUT VARIABLES | 4-12 |
| 4.5 | SPECIAL PROBLEMS WITH SMALL URBAN WATERSHEDS...4-13 | |
| 4.6 | DERIVING ULTIMATE DEVELOPMENT PEAK FLOW RATES USING THE ADJUSTED WinTR-20 MODEL | 4-15 |
| 4.6.1 | Ultimate Development as Defined Under COMAR | 4-16 |
| 4.6.2 | Using Comprehensive Planning Maps for Future Hydrologic Conditions | 4-17 |
| 4.7 | CALIBRATING INDIVIDUAL SUB-AREAS IN LARGE WATERSHEDS..... | 4-18 |
| 5 | REGRESSION EQUATIONS FOR ESTIMATING LOW FLOWS FOR FISH PASSAGE IN MARYLAND | 5-1 |
| 5.1 | EXECUTIVE SUMMARY | 5-1 |
| 5.2 | INTRODUCTION..... | 5-2 |

| | | |
|-----|--|------|
| 5.3 | LOW FLOW FREQUENCY ANALYSIS | 5-4 |
| 5.4 | REGRESSION ANALYSIS FOR ANNUAL MINIMUM N-DAY LOW FLOWS..... | 5-5 |
| 5.5 | REGRESSION ANALYSIS FOR SEASONAL LOW FLOWS | 5-11 |
| 5.6 | FUTURE TOPICS FOR RESEARCH..... | 5-12 |
| 5.7 | SUMMARY | 5-14 |
| 5.8 | ATTACHMENT 1. SUMMARY OF DATA USED IN THE REGRESSION ANALYSIS | 5-16 |
| 5.9 | ATTACHMENT 2. ANALYSIS OF SEASONAL FLOW CHARACTERISTICS..... | 5-19 |
| | 5.9.1 March to June..... | 5-19 |
| | 5.9.2 September to November | 5-20 |
| 6 | ESTIMATION OF DISCHARGES IN TIDAL REACHES..... | 6-1 |
| 6.1 | INTRODUCTION..... | 6-1 |
| 6.2 | TIMING OF THE STORM SURGE AND RIVERINE HYDROGRAPHS | 6-3 |
| 6.3 | APPROACH FOR ESTIMATING RIVERINE T-YEAR HYDROGRAPHS FOR WATERSHEDS GREATER THAN 300 SQUARE MILES | 6-4 |
| 6.4 | APPROACH FOR ESTIMATING MAXIMUM STORM SURGE DISCHARGE..... | 6-6 |
| 6.5 | MODELS FOR EVALUATING TIDAL FLOW | 6-7 |
| 6.6 | RECOMMENDATIONS FOR COMBINING STORM SURGE AND RIVERINE DISCHARGES..... | 6-8 |
| 6.7 | ESTIMATION OF THE 2-YEAR TIDAL ELEVATION | 6-11 |
| 6.8 | ATTACHMENT 1. FREQUENCY AND TIMING OF RIVERINE AND STORM SURGE HYDROGRAPHS | 6-13 |
| | 6.8.1 Cambridge Tide Station | 6-13 |
| | 6.8.2 Solomons Island Tide Station | 6-15 |
| | 6.8.3 Baltimore Tide Station..... | 6-17 |
| | 6.8.4 Annapolis Tide Station | 6-20 |
| 7 | RECOMMENDATIONS AND FUTURE RESEARCH..... | 7-1 |
| 7.1 | INTRODUCTION..... | 7-1 |
| 7.2 | CLIMATE CHANGE | 7-1 |
| 7.3 | TIME OF CONCENTRATION..... | 7-2 |
| 7.4 | UNIT HYDROGRAPH PEAK RATE FACTORS | 7-4 |
| 7.5 | PEAK DISCHARGE TRANSPOSITION | 7-4 |
| 7.6 | TRANSFORMATION OF ZONING-MAP INFORMATION INTO HYDROLOGIC MODEL INPUT | 7-5 |

| | | |
|-------------|---|------------|
| 7.7 | ADJUSTING WINTR-20 USING REGRESSION EQUATION ESTIMATES | 7-5 |
| 7.8 | THE DESIGN STORM | 7-5 |
| 7.9 | GEOMORPHIC UNIT HYDROGRAPHS..... | 7-6 |
| 7.10 | STATISTICAL ALTERNATIVES | 7-7 |
| 7.11 | DEVELOPMENT OF A MODEL FOR USE ON MIXED URBAN-RURAL WATERSHEDS | 7-8 |
| 7.12 | MUSKINGUM-CUNGE CHANNEL ROUTING PROCEDURE | 7-8 |
| 7.13 | RELATIONSHIP OF PERCENT IMPERVIOUS AND LAND USE...7-9 | |
| 7.14 | RECOMMENDATIONS FOR UPDATING THE HYDROLOGY PANEL REPORT..... | 7-9 |
| 7.15 | SUMMARY OF THE MAJOR RESEARCH ITEMS..... | 7-9 |

REFERENCES

APPENDICES

| | |
|-------------------|---|
| APPENDIX 1 | WATERSHED CHARACTERISTICS FOR USGS STREAM GAGES |
| APPENDIX 2 | FLOOD FREQUENCY RESULTS FOR USGS GAGES IN MARYLAND |
| APPENDIX 3 | FIXED REGION REGRESSION EQUATIONS FOR MARYLAND |
| APPENDIX 4 | CHANNEL GEOMETRY REGRESSION EQUATIONS FOR MARYLAND |
| APPENDIX 5 | EXAMPLES OF CALIBRATION OF WinTR-20 TO REGIONAL REGRESSION EQUATIONS |
| APPENDIX 6 | REGRESSION EQUATION FOR ESTIMATING THE TIME OF CONCENTRATION |
| APPENDIX 7 | PARTIAL DURATION RAINFALL FREQUENCY DATA / 6, 12, AND 24-HOUR TEMPORAL DISTRIBUTIONS |
| APPENDIX 8 | HISTORICAL SUMMARY OF REGRESSION EQUATIONS TO PREDICT FLOOD FLOWS IN MARYLAND |
| APPENDIX 9 | LINKS TO WEBSITES WITH HYDROLOGIC RESOURCES AND PROGRAMS |

LIST OF FIGURES

| | | |
|--------------|--|------|
| Figure 2-1: | Hydrologic Regions Defined by Dillow (1996) and Used by Moglen and others (2006) and Thomas and Moglen (2015) | 2-2 |
| Figure 2-2: | Fixed Region Regression Equation Flow Chart | 2-7 |
| Figure 3-1: | 99% Confidence Error Envelope for Difference between Manually and Automatically Defined Areas | 3-3 |
| Figure 3-2: | Relationship between I_a and S | 3-5 |
| Figure 3-3: | Hydrograph Response to Changing RCN..... | 3-6 |
| Figure 3-4: | Graphical definitions of lag time and time of concentration. | 3-9 |
| Figure 3-5: | Bankfull Characteristics for Selected USGS Sites in the Maryland Piedmont..... | 3-17 |
| Figure 3-6: | Time-Area Curves Using Surveyed and Regression Equation Defined..... | 3-18 |
| Figure 3-7: | Time-Area Curves Using Surveyed In-Bank Cross Sections and Indicated Manning Roughness Coefficients..... | 3-18 |
| Figure 3-8: | Discharge-Area Curves for Surveyed and Contour Defined Synthetic Cross Sections | 3-20 |
| Figure 3-9: | 6, 12, and 24 Hour Storm Distributions, Howard County MD | 3-23 |
| Figure 3-10: | Areal Reduction curves based on TP-40 | 3-26 |
| Figure 4-1: | Over-prediction behavior of WinTR-20 for all return periods. | 4-1 |
| Figure 4-2: | Time of concentration versus drainage area in Maryland. | 4-9 |
| Figure 4-3: | Flow chart for changing existing land use to Ultimate Development ... | 4-15 |
| Figure 5-1: | Location of 50 gaging stations used in the analysis where there are 10 or more years of daily flows and the drainage area is less than 10 square miles | 5-3 |
| Figure 5-2: | Comparison of the 2-year 120-day discharges based on the logarithmic transformed (logs) and the untransformed analysis (cfs values)..... | 5-5 |
| Figure 5-3: | Relation between the gaging station 2-year 120-day discharge and drainage area for all 50 stations..... | 5-9 |
| Figure 5-4: | Comparison of the 2-year 120-day discharge from Equation 3 to the gaging station estimates..... | 5-10 |
| Figure 5-5: | Comparison of the 2-year 120-day discharge from Equation 3 to the gaging station estimates without the three gaging station estimates of 0.1 cfs | 5-11 |
| Figure 5-6: | Schematic of determining the streamflow recession index | 5-13 |
| Figure 5-7: | The March-June mean flow with 90- and 10-percent annual chance of exceedance plotted versus drainage area..... | 5-20 |
| Figure 5-8: | The September-November mean flow with 90- and 10-percent annual chance of exceedance plotted versus drainage area..... | 5-21 |
| Figure 6-1: | An example storm surge hydrograph for Baltimore, MD for..... | 6-1 |
| Figure 6-2: | An example riverine hydrograph for the Choptank River near Greensboro, MD (station 01491000) for September 14-22, 1999..... | 6-2 |

| | | |
|-------------|---|------|
| Figure 6-3: | Dimensionless hydrographs for the Appalachian Plateau (AP), Piedmont (PD), and Coastal Plain (CP) Regions in Maryland and the Georgia and SCS dimensionless hydrographs with peaks aligned [from Dillow (1998)] | 6-5 |
| Figure 6-4: | Comparison of 100-year hydrographs for the Choptank River near Greensboro, MD (station 014910000) | 6-6 |
| Figure 6-5: | Illustration of the riverine peak discharge (Riverine Q_{max}) occurring at the same time as the maximum storm surge discharge (Surge Q_{max}) | 6-9 |
| Figure 6-6: | Location of the Cambridge tide station | 6-13 |
| Figure 6-7: | Location of the Solomons Island tide station | 6-15 |
| Figure 6-8: | Location of the Baltimore tide station | 6-17 |
| Figure 6-9: | Location of the Annapolis tide station..... | 6-20 |

Note: Figures included in the Appendices are not listed.

LIST OF TABLES

| | | |
|------------|---|------|
| Table 1-1: | Acceptable Storm Durations (hrs) for Total Watershed T_c | 7 |
| Table 2-1: | Flood Frequency Estimates for Youghiogheny River near Oakland, Maryland (station 03075500) based on Gaging Station data, Regression Equations and a weighted estimate. | 2-6 |
| Table 2-2: | Range of Watershed Characteristics for Each Hydrologic Region in Maryland. | 2-13 |
| Table 3-1: | Unit Hydrograph Peak Rate Factors | 3-7 |
| Table 3-2: | Dimensionless Unit Hydrograph..... | 3-8 |
| Table 3-3: | Manning’s Roughness Coefficients n for Sheet Flow | 3-13 |
| Table 3-4: | Rainfall ratios based on NOAA 14 and Type II for a point in Howard County..... | 3-24 |
| Table 3-5: | Comparison of peak discharges between NOAA 14 and Type II storm distributions..... | 3-24 |
| Table 4-1: | Logical Progression of Calibration for Multiple Storm Frequency Models..... | 4-3 |
| Table 4-2: | Table of WinTR-20 Variable Adjustment Limits for Calibration | 4-11 |
| Table 4-3: | Urban Curve Numbers | 4-14 |
| Table 5-1: | Correlation matrix for the watershed characteristics for the 50 gaging stations used in the regression analysis..... | 5-7 |
| Table 6-1: | Summary of surge and riverine events for the Choptank River (113.7 square miles) and Cambridge tide station..... | 6-14 |
| Table 6-2: | Summary of surge and riverine events for the Patuxent River (348.9 square miles) and Solomons Island tide station..... | 6-16 |
| Table 6-3: | Summary of surge and riverine events for the Patapsco River (284.7 square miles) and the Baltimore tide station | 6-18 |
| Table 6-4: | Summary of surge and riverine events for Gwynns Falls (63.6 square miles) and Baltimore tide station | 6-19 |
| Table 6-5: | Summary of surge and riverine events for Moores Run (3.52 square miles) and the Baltimore tide station | 6-19 |
| Table 6-6: | Summary of surge and riverine events for SF Jabez Branch (1.0 square miles) and the Annapolis tide station | 6-21 |
| Table 6-7: | Summary of surge and riverine events for North River (8.93 square miles) and the Annapolis tide station | 6-21 |
| Table 6-8: | Summary of surge and riverine events for Bacon Ridge Branch (6.97 square miles) and the Annapolis tide station | 6-22 |

Note: Tables included in the Appendices are not listed.

EXECUTIVE SUMMARY

In June 1996, Maryland State Highway Administration (SHA) and the Maryland Department of Environment (MDE) appointed the Maryland Hydrology Panel (the Panel) to explore the development of improved procedures that would ensure an optimal balance between preserving the environmental quality of Maryland streams and the hydraulic performance of highway drainage structures. The Panel: 1) worked closely with the staffs of the two Departments; 2) extensively reviewed Maryland policies and design approaches, as well as those of other States; and 3) conducted extensive research directed toward improving the statistical and deterministic foundations of the two Department's hydrologic modeling procedures.

In February 2001 the Panel issued a report entitled, Applications of Hydrologic Methods in Maryland. Adoption of the recommendations of the February 2001 report led to significant cost and time savings in the design/review processes of the two Departments through better utilization of computer and human resources. Of even greater importance, the implementation of the recommendations increased confidence in the design computations.

As the staffs of the two Departments gained experience and confidence with the procedures recommended by the Panel in 2001, they came forward with numerous suggestions that would lead to even better approaches. The Panel reconvened in the Fall of 2002 and, following the suggestions of the two Department's staffs, identified sufficient improvements to justify the publication of the second edition of the report in August 2006.

The third edition of the report entitled *Application of Hydrologic Methods in Maryland* was dated September 2010. The report was updated to include the Windows version of TR-20 (WinTR-20), revised temporal rainfall distributions based on NOAA Atlas 14, and revised versions of the Fixed Region regression equations for selected hydrologic regions in Maryland. This version of the report, the fourth edition, was updated to include new regression equations for flood discharges for the Piedmont-Blue Ridge and Appalachian Plateau Regions, regression equations for estimating low flows for fish passage and a new chapter on "Estimation of Discharges in Tidal Reaches". The Panel strongly believes that the procedures recommended in the present report, that have already been adopted by both Departments, positions Maryland as a national leader in cooperation to ensure that the hydrologic requirements of highway drainage structures and the environmental protection of streams are met.

Maryland correctly requires highway drainage structures to pass the floods from watersheds under both existing land use conditions as well as the floods that can be anticipated when the watershed land use changes to a future "ultimate development" condition. This mission must be met while providing a minimal environmental impact on

the stream. The Panel recommends that the deterministic hydrologic model, WinTR-20, developed by the Natural Resource Conservation Service (NRCS) continue to serve as the base method for flood flow predictions. All deterministic hydrologic models, such as the WinTR-20, require the estimation of a number of input parameters that are developed through field and map investigations. These parameters are difficult to estimate and research conducted by the Panel shows that errors can cause significant problems. The Panel concluded that it was mandatory to provide guidance that would minimize the possibility of accepting errors in the WinTR-20 input parameters and, thereby, ensure that the flood flows predicted are within the bounds of floods expected in Maryland. Thus, the Panel presents statistical methods that can be used to calibrate the WinTR-20 model using long term stream gage records collected in Maryland by the U.S. Geological Survey and regression equations documented in this report. The Fixed Region regression equations, for which earlier versions were documented in the August 2006 and September 2010 versions of this report, were updated in 2015 for the Piedmont-Blue Ridge and Appalachian Plateau Regions and the revised equations in this report are the recommended statistical methods for ungaged watersheds.

A key feature that ensures success is the Panel recommendation that requires the use of the software package GISHydro. State funding provided support for the development of GISHydro by the Department of Civil and Environmental Engineering at the University of Maryland. GISHydro provides the required hydrologic information by interfacing the recommended statistical and deterministic modeling procedures with a statewide land-soil-topographic database. Without GISHydro the procedures recommended by the Panel would be too time and labor consuming to be implemented. With GISHydro the approaches required by the Panel recommendations can be performed in a fraction of the time and with much more confidence and control than was possible with the traditional procedures of the late 1990's. Both Departments now use GISHydro. The confidence that the procedures are state-of-the-art and are being correctly applied has led to much shorter turn around time in the design/review/approval process with significant cost savings.

Websites have been created that allow GISHydro to be downloaded at no cost or operated remotely as a web-based version that has the same functionality as the stand alone version. The software is also available at SHA headquarters for firms that are performing consulting work on state or county-funded projects.

As has been the case for previous editions, this fourth edition of the report should be considered to be a living document. Available tools, data, and methods all change with the times. Flood information, land use data, and regression equations are examples of items that have led to changes in the report from one edition to the next. The Panel specifically wishes to recognize the emergence of climate change as a new driver for changing hydrology. We expect future editions of the report to quantitatively address how considerations for climate change should enter into hydrologic analysis, planning, and design within Maryland.

This document presents a set of hydrologic modeling procedures that are designed to ensure an optimal balance between preserving the environmental quality of Maryland streams and the hydraulic performance and safety of highway structures. These procedures are recommended by the Maryland Hydrology Panel for use by the Maryland Department of Environment and the Maryland State Highway Administration for all watersheds of approximately one square mile and larger. Experience has shown that the procedures are also applicable for some watersheds smaller than one square mile if the watershed characteristics are within the application range of the approved equations.

THE MARYLAND HYDROLOGY PANEL
July 2016

This document presents a set of hydrologic modeling procedures that are designed to ensure an optimal balance between preserving the environmental quality of Maryland streams and the hydraulic performance and safety of highway structures. These procedures are recommended by the Maryland Hydrology Panel for use by the Maryland Department of Environment and the Maryland State Highway Administration.


Respectfully submitted:




Richard H. Berich, PE
Hydraulic Engineer
EBA Engineering, Inc.



William H. Merkel, PE
Hydraulic Engineer
USDA Natural Resources Conservation
Service (retired)

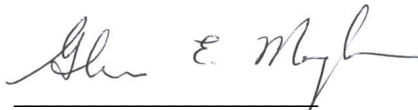

Glenn E. Moglen, PhD, PE
Professor
Virginia Tech

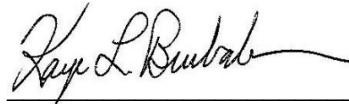

Kaye L. Brubaker, PhD
Associate Professor
University of Maryland, College Park



Wilbert O. Thomas, Jr., PH
Senior Technical Consultant
Michael Baker International



Quan D. Quan
Hydraulic Engineer
USDA Natural Resources Conservation
Service

Dr. Arthur Miller of Pennsylvania State University and Mr. Michael Ports, then of Parsons, Brinkerhoff, served on the Panel through the publication of the February, 2001 report. Dr. Robert Ragan, Professor Emeritus, University of Maryland, served on the Panel through the publication of the second edition of the report in August, 2006. Donald Woodward, retired Natural Resources Conservation Service, and Dr. Michael Casey, George Mason University, served on the Panel through the publication of the third edition of the report in September 2010.

Communication between the Panel and the primary user agencies, the Maryland Department of Environment (MDE) and the Maryland State Highway Administration (SHA), was critical to the successful development of a usable system. David Guignet, PE, of MDE and Andrzej (“Andy”) J. Kosicki, PE, of SHA served as liaisons between their agencies and the Panel.

GLOSSARY OF EQUATION VARIABLES

| Symbol | Definition | Units | Page of First Reference |
|------------|---|--------------------|-------------------------|
| A_g | drainage area at the gaging station | miles ² | 2-8 |
| A_G | drainage area of watershed determined using GIS methods | miles ² | 3-3 |
| a_i | the i th increment of the watershed area | miles ² | 3-9 |
| A_M | drainage area of watershed determined manually from 1:24,000 scale maps | miles ² | 3-3 |
| ARC | antecedent runoff condition (1 indicates dry, 2 indicates average, 3 indicates wet) | -- | 4-5 |
| A_s | surface area of a tidal basin at mean tide | feet ² | 6-6 |
| A_{sf} | drainage area of the watershed | feet ² | 3-11 |
| A_{sm} | drainage area of the watershed | miles ² | 3-12 |
| A_u | drainage area at the ungaged location | miles ² | 2-8 |
| c | the specified prediction interval in Student's t distribution (e.g., 0.05) | -- | 2-10 |
| DA | drainage area | miles ² | 2-13 |
| ΔD | duration of the unit excess rainfall | minutes | 3-7 |
| Δt | time increment for hyetograph | minutes | 1-8 |
| e | mathematical constant (Euler's constant) equal to 2.718... | -- | 3-16 |
| FOR | percent of drainage area that is classified as forest | percent | 2-13 |
| G | average skewness for a given hydrologic region | -- | 2-5 |
| H | difference in elevation between high and low storm surge levels | feet | 6-6 |
| ho | leverage, expresses the distance of the site's explanatory variables from the center of the regressor hull | -- | 2-10 |
| i | precipitation intensity | inches/hour | 3-13 |
| I_a, I_a | initial abstraction | inches | 1-8 |
| IA | percent of the drainage area that is impervious as determined using NRCS imperviousness coefficients and the Maryland Department of Planning land use data (IA > 10% is considered urban) | percent | 2-13 |
| K | travel time constant in the Muskingum-Cunge routing method | minutes | 3-26 |
| K_x | the Pearson III frequency factor for recurrence interval, x and skewness, G | -- | 2-5 |
| L | lag time, the time between the center of mass of the rainfall excess and the hydrograph peak | hours | 3-9 |
| L | overland flow length | feet | 3-13 |

| Symbol | Definition | Units | Page of First Reference |
|------------------|--|--------------------------------|--------------------------------|
| labsoil | sum of A and B soils predictor used in low-flow regression | percent | 5-6 |
| LANDSL | average watershed slope | feet/feet | 5-1 |
| lcdsoil | sum of C and D soils predictor used in low-flow regression | percent | 5-6 |
| lcsl | channel slope predictor used in low-flow regression | feet/feet | 5-6 |
| lda | drainage area predictor used in low-flow regression | miles ² | 5-6 |
| lfor | forest cover predictor used in low-flow regression | percent | 5-6 |
| L _h | hydraulic length of the watershed | feet | 3-11 |
| lia | impervious area predictor used in low-flow regression | percent | 5-6 |
| LIME | percent of the drainage area that is underlain by carbonate rock (limestone and dolomite) | percent | 2-13 |
| llandsl | land slope predictor used in low-flow regression | feet/feet | 5-6 |
| LQw | logarithm of weighted peak discharge at a gaging station | log(feet ³ /second) | 2-5 |
| LQg | logarithm of peak discharge at a gaging station based on observed data | log(feet ³ /second) | 2-5 |
| LQr | logarithm of peak discharge computed from the appropriate Fixed Region regression equation | log(feet ³ /second) | 2-5 |
| LSLOPE | average land slope calculated on a pixel by pixel basis | -- | 2-13 |
| M | total length of the heavy line contours on a 1:24,000 topographic map | feet | 3-11 |
| n | number of gaging stations used in the analysis | -- | 2-10 |
| N | contour interval between heavy line contours on a 1:24,000 topographic map | feet | 3-11 |
| n | Manning's roughness | -- | 3-13 |
| Ng | years of record at the gaging station | years | 2-5 |
| Nr | equivalent years of record for the fixed region regression estimate | years | 2-5 |
| p | number of explanatory variables used in the Fixed Region regression equation | -- | 2-10 |
| P | precipitation depth | inches | 3-4 |
| P ₂ | 2-yr, 24-hour rainfall depth | inches | 3-13 |
| Q | runoff volume | inches | 3-4 |
| Qf | final estimate of the peak discharge at the ungaged site | feet ³ /second | 2-8 |
| Qg | peak discharge at the gaging station based on observed data | feet ³ /second | 2-5 |
| Q _i | the runoff from watershed area i | inches | 3-9 |
| Q _{max} | maximum discharge in a tidal cycle | feet ³ /second | 6-6 |
| q _p | peak discharge | feet ³ /second | 3-6 |
| Qr | peak discharge computed from the appropriate Fixed Region equation | feet ³ /second | 2-5 |

| Symbol | Definition | Units | Page of First Reference |
|----------------|--|--------------------------------|--------------------------------|
| $Q_{T,D}$ | discharge for return period T [years] and duration D [days] | feet ³ /second | 5-1 |
| Q_w | weighted peak discharge at the gaging station | feet ³ /second | 2-5 |
| Q_x | peak discharge for recurrence interval, x | feet ³ /second | 2-10 |
| R | correlation coefficient | -- | 2-5 |
| R | ratio of the weighted peak discharge (Q_w) to the Fixed Region regression estimate (Q_r) | -- | 2-8 |
| RCN | runoff curve number | -- | 1-8 |
| RF | areal reduction factor for precipitation | -- | 3-27 |
| R_h | hydraulic radius | feet | 3-13 |
| Rw | scaled ratio for estimating peak discharge at ungaged site | -- | 2-9 |
| S | potential maximum retention | inches | 1-8 |
| S | standard deviation of the logarithms of the annual peak discharges at the ungaged location | log(feet ³ /second) | 2-5 |
| S | overland flow slope | feet/feet | 3-13 |
| S_A | percent of the drainage area that is classified as NRCS Hydrologic Soil Group A | percent | 2-13 |
| S_D | percent of the drainage area that is classified as NRCS Hydrologic Soil Group D | percent | 2-13 |
| SD | standard deviation of estimates of Manning's n for channel flow | -- | 3-16 |
| SE | standard error of the low-flow regression equations | percent | 5-1 |
| SEp | standard error of prediction of the Fixed Region regression estimates in logarithmic units | log(feet ³ /second) | 2-5 |
| T | the critical value of Student's t | -- | 2-10 |
| T | tidal period (24 hr) | seconds | 6-6 |
| T_c | time of concentration of the watershed | hours | 3-7 |
| T_p | time to peak of the unit hydrograph | hours | 3-6 |
| T_t | travel time | hours | 3-13 |
| T_{ti} | travel time from the center of a_i to the point of reference | hours | 3-9 |
| V | overland flow velocity | feet/second | 3-13 |
| X | parameter in Muskingum-Cunge routine method | -- | 3-22 |
| xo | a row vector of the logarithms of the explanatory variables at a given site | log(various units) | 2-10 |
| $(X^T X)^{-1}$ | covariance matrix of the regression parameters | log(various units) | 2-10 |
| Y | average watershed land slope | Percent | 3-9 |

CHAPTER ONE

1 Introduction

The Maryland State Highway Administration (SHA) has been using deterministic models, primarily the WinTR-20 developed by the USDA-Natural Resources Conservation Service, to synthesize hydrographs and to estimate peak discharges for both existing and ultimate development conditions for some time. However, there has been no way to ensure that the WinTR-20 results for a watershed are representative of Maryland conditions. A report entitled “Analysis of the Role of Storm and Stream Network Parameters on the Performance of the SCS-TR-20 and HEC-1 Under Maryland Conditions,” by Ragan and Pfefferkorn (1992), concluded that the WinTR-20 could produce good results, but it was quite sensitive to the values selected for input parameters including the Manning roughness coefficients, representative cross sections, curve numbers, storm structure and storm duration. If the WinTR-20 was to continue to be used, the SHA wanted guidance that would lead to more dependable performance and confidence that the results would be consistent with Maryland stream flow records.

The Water Management Administration (WMA) of the Maryland Department of the Environment (MDE) has selected the WinTR-20 model or its equivalent as a standard deterministic method for computing flood flows in Maryland. However, the SHA wanted to make greater use of regional regression equations based on long term USGS stream gaging records. The WMA has been reluctant to accept a general use of regression equations for the following reasons:

- they do not account for ultimate development
- they do not reflect recent land use changes in some hydrologic regions, and
- they do not account for changes in storage and times of concentration.

These are valid concerns in Maryland because of the rapid changes in watershed characteristics being produced by urbanization. However, since regression equations use USGS stream gaging stations in the region for definition, they can provide a reasonable indication of existing runoff conditions and, therefore, can provide a base for calibration of the WinTR-20 or similar deterministic models. In addition, regression equations in the Western Coastal Plain Region and the combined Piedmont-Blue Ridge Region include impervious area as a predictor of land use change. The WMA requires that for a model to be considered for use in estimating flood peaks the model must meet the following conditions:

- Be in the public domain.
- Be generally accepted by the hydrologic community.
- Be verifiable.

Regional regression equations derived from USGS stream gaging stations meet all three of the above criteria. First, the regional regression equations developed for Maryland are in the public domain. Second, the regression methodology is widely used and recognized as acceptable by the hydrologic community. And third, the original data, regression methodologies, and the resulting equations are published and, therefore, readily verifiable.

Standard hydrologic practice strongly recommends that all deterministic models, such as the WinTR-20, be calibrated against local data. Where sufficient actual, measured rainfall and runoff data are available, the WinTR-20 model should be calibrated and, if possible, validated prior to its application. However, on-site rainfall and runoff data are rarely available in actual practice. In these more typical circumstances, regional regression equations developed from stream flow data may be used as a basis to “calibrate” the WinTR-20 model, providing the watershed conditions are consistent with those used to develop the equations.

Because of the need to improve confidence of the WinTR-20 model, the regional regression equation issues outlined above, and an array of other concerns being faced by the two organizations, the Maryland Water Management Administration and the Maryland State Highway Administration agreed to appoint a special hydrology panel. The Hydrology Panel (the Panel) was to be composed of professionals with extensive experience in Maryland who, at the same time, were nationally recognized for their substantial contributions to the practice of hydrology. Appointed in the fall of 1996, the Panel was chartered to operate independently of the SHA or other state agencies. The mission of the Panel was to:

Review Maryland hydrologic practices and make recommendations concerning peak flood estimating procedures that will best serve to satisfy agency needs, Maryland laws and regulations.

Three versions of a report entitled, “Application of Hydrologic Models in Maryland” were published in February 2001, August 2006 and September 2010. Experiences with the application of recommendations presented in these reports, improvements in GIS technologies, and updates in WinTR-20 and the Maryland regional regression equations led to the publication of this fourth edition of the report. The following section presents the Panel’s recommendations. Subsequent chapters explain the basis for these recommendations and the procedures required for their accomplishment.

1.1 RECOMMENDATIONS

The Panel recommends the use of the software package, GISHydro and future upgrades, for hydrologic analysis in the State of Maryland. The current operational software is GISHydro2000 based on ArcView but will be replaced by GISHydroNXT based on ArcGIS in the future. The terminology GISHydro is used throughout this report to refer

to either GISHydro2000 or GISHydroNXT. GISHydro includes delineation of the watershed boundaries, curve number and time of concentration computations and direct interfaces with both the regression equations and the WinTR-20. Use of this software ensures reproducibility of watershed characteristics based on the topographic, land cover, and soil databases that are integral to GISHydro. Automated reporting that is built into GISHydro allows reviewers at the Maryland Department of the Environment to independently confirm analyses submitted for their review. Consistency in analysis presentation also helps to streamline the review process.

GISHydro is available for download at no cost at the following website:

<http://www.gishydro.eng.umd.edu>

The Panel recognizes that although GISHydro is free, the GIS software required to support this program can represent a significant expense for some firms. To give broader access to this software, the SHA provides a web-based version of GISHydro. The web-based version contains exactly the same functionality as the stand-alone version of the software.

The web-based version of the software is available by following links and instructions on the website listed above.

1.1.1 Overview of the Modeling Process and the Calibration Requirements

The hydrologic analysis of Maryland State Highway Administration bridges and culverts must evaluate the behavior of the structure and local stream under both existing and ultimate development watershed conditions. Because two land cover and flow path conditions are involved, the basis for these hydrologic analyses must be a deterministic model that can simulate the runoff processes that occur during and after the storm. The deterministic model is the WinTR-20 model or an approved equivalent. The recommended first step is to calibrate the deterministic model using field and map defined input parameters so that the model adequately describes the runoff processes under existing watershed conditions. After the designer is satisfied that the calibrated deterministic model provides a realistic representation of the existing watershed conditions, the impact of ultimate development will be simulated by adjusting the input parameters to reflect the planned land cover and flow path modifications.

Hydrologic analyses for all watersheds will be supported by field investigations and the design discharges will be determined utilizing two hydrologic models: (1) a probabilistic method based on a local USGS gaging station or approved regression equations that are developed through statistical analyses of USGS stream gage records (Chapter 2); and (2) a flood hydrograph deterministic procedure such as the WinTR-20 or its equivalent. The objective is to use the probabilistic method based on long-term stream gage records to ensure that the WinTR-20 produces peak discharges that are consistent with Maryland

conditions. As described in Chapters 3 and 4 of this report, the sensitivity of the WinTR-20 model input parameters and the uncertainties associated with the selection of these parameters are such that calibration against USGS historical data is mandatory. The calibration methodology will be utilized in the following order of priority to determine peak flow:

1. Use a gage located at the site with the frequency curve of record being weighted with the regional regression estimates, following the approach presented by Dillow (1996) or future procedures once they become available. Report the discharges as the weighted estimate and an error bound of plus one standard error of prediction. Develop the stream gage frequency curves following the procedures in the Interagency Advisory Committee on Water Data Bulletin 17B “Guidelines For Determining Flood Flow Frequency” (1982) or Bulletin 17C when it is published. Bulletin 17B and the soon to be released updated version, Bulletin 17C, are the standard references for the preparation of flood flow frequency curves for gaged watersheds in the United States.
2. If there is no gage at the site, but there is a gage on the same stream that can be transposed, (the gage’s data can be transposed \pm half the gaged area upstream or downstream), transpose the gaged record to the site following the approach recommended by Dillow (1996). Report the discharges as the estimate and an error bound of plus one standard error of prediction.
3. If there is no gage on the stream and the watershed characteristics are within the bounds of those used to derive the approved regional regression equations, apply the regression equations to the watershed. Report the discharges as the regression equation estimate and an error bound of plus one standard error of prediction.

The region between the “best estimate line” of the regional regression equations and the upper bound of plus one standard error of prediction will be defined as the “**calibration window**” for the purposes of these recommendations.

If the peak discharge of the hydrograph synthesized for the design storm is within the calibration window, the analysis will be accepted as a reasonable representation of the runoff for existing watershed conditions, providing that the WinTR-20 input parameters are within the bounds of sound hydrologic practice. The model then forms the basis for simulating the watershed under ultimate development conditions.

If the peak discharge estimated by the deterministic model is outside the calibration window, additional investigations and simulations will be conducted to determine:

1. Are the watershed conditions consistent with those of the USGS stream gages used to develop the approved regional regression equations?

2. Are the regional regression equations appropriate for use on this watershed?
3. Even though the averaged watershed characteristics are consistent with those of the USGS stream gages used to develop the regression equations, are there specific conditions such as extensive stream valley wetlands, a deeply incised channel or other factors that would cause unusually low or high peak discharges?
4. Are the deterministic model parameters defining the curve number, time of concentration and storage attenuation appropriate for the field conditions being simulated? If not, they can be adjusted in accordance with Chapter 4. Some parameter adjustment is allowed because the WinTR-20 is quite sensitive to the assigned values and it is very difficult to select quantities that best represent the watershed conditions. Any adjustments must be justified with supporting documentation and **MUST BE WITHIN THE BOUNDS OF SOUND HYDROLOGIC PRACTICE.**

If there is no term in the regional regression equations that reflects the degree of urbanization and the watershed is greater than 10% impervious, then the WinTR-20 calibration process for existing conditions will be a two-step process. First, the designer will estimate the pre-developed land cover distribution and calibrate to the regression equations for this pre-developed condition. These WinTR-20 discharges will then be adjusted by revising the input parameters to reflect the increased curve numbers and the drainage network of the existing condition. The process is described in section 4.6 of this report. The Panel believes that the uncertainties associated with a “pre-developed calibration” are less than those associated with an approach that requires the designer to select WinTR-20 input parameters without any opportunity for calibration.

If the WinTR-20 peak discharges do not fall within the calibration window of the regression equations, the designer should explain why the existing watershed conditions are significantly different from those defining the regression equations or why the WinTR-20 model is not applicable to this particular watershed. The designer will then select and justify the most appropriate method for the specific watershed.

The focus of the Panel’s efforts was the development of procedures for use on watersheds having drainage areas larger than one square mile. Experience on SHA projects has shown that GISHydro and the calibration procedures using the regression equations can often be applied on watersheds less than one square mile. When applying the procedures on basins smaller than one square mile, the user must be especially careful to ensure that the watershed boundary generated by GISHydro is consistent with that indicated by the USGS 1:24000 Topographic Maps or more detailed topographic maps. GISHydro develops the watershed boundary from USGS digital elevation data spaced on a 30 meter grid. As the watershed area becomes smaller, the number of elevation points used by GISHydro to generate the boundary decreases. The consequence is an increasing risk that

the boundary generated by the computer delineation may differ from that indicated by topographic maps.

An example of when it might not be possible to get the WinTR-20 peak discharges to fall within the calibration window of the regression is in the Piedmont-Blue Ridge physiographic region. In this region, the area of limestone geology is a predictor variable in the Fixed Region regression equations. The area of limestone geology was compiled from geologic mapping from several sources and is not known with precision. A slight shifting of the limestone geology boundary could significantly change the estimated percentage of limestone in a watershed with boundaries intersecting both limestone and non-limestone areas. The uncertainty in estimated limestone geology becomes larger as the overall watershed area gets smaller. Errors and uncertainty in percent limestone geology can have a significant effect on the resultant flood discharges estimated by the Fixed Region regression equations. Because of the uncertainty associated with the determination of limestone geology, the WinTR-20 model estimates should NOT be calibrated to the Fixed Region regression equations for watersheds when there is a significant percentage of limestone (greater than 50 percent) in the watershed. For these watersheds, the Fixed Region regression equations or gaging station data should be used as described below.

Based on comparisons to gaging station data, the WinTR-20 estimates can be very conservative when the percentage of limestone area exceeds 50 percent of the drainage area. If there is a gaging station near the watershed outlet (within 50 percent of the drainage area of the watershed being studied) and the percentage of limestone in the watershed is greater than 50 percent, the analyst should use a weighted average of the gaging station estimates and the Fixed Region regression estimates for existing development conditions following the approach described later in Section 2.3, Estimates for Ungaged Sites near a Gaging Station. If there is no gaging station nearby, then the analyst should use the Fixed Region regression estimates for existing conditions. In each instance, the flood discharges for existing conditions should be adjusted for ultimate development based on the ratio of uncalibrated WinTR-20 flood discharges for the ultimate development and existing development conditions.

1.1.2 Issues Concerning the Selection of WinTR-20 Input Parameters

The first step is to use map and field investigations to select input parameters that are consistent with established hydrologic practice and give a reasonable simulation of existing watershed conditions. If inputs give results that are outside the calibration window, the designer will review the parameters used as inputs to define the WinTR-20 simulation. If the review indicates that a parameter may be incorrect, additional field and map investigations will be used to support any corrections. **In no instance will WinTR-20 inputs be accepted that are outside the bounds of standard hydrologic practice.**

Before attempting to revise input parameters in a WinTR-20 calibration against one of the three approaches listed in Section 1.1.1, the designer should carefully study Chapter 3

of the present report and MD-SHA AWO92-351-046, “Analysis of the role of storm and stream parameters on the performance of SCS-TR-20 and HEC-1 under Maryland Conditions” (Ragan and Pfefferkorn, 1992).

Normally, watersheds having drainage areas larger than one square mile will be delineated using the digital terrain modeling capabilities of GISHydro or manually on 1:24000 USGS quad sheets. Special care must be taken in locating the ridgeline on the eastern shore or in other areas of low relief. The designer should always perform a map check of the automatic boundary delineation of GISHydro that uses 30-meter resolution USGS digital terrain data.

The WinTR-20 model will be run using the latest precipitation-frequency information from NOAA Atlas 14 (Bonnin and others, 2006) and center-peaking NRCS hyetographs based on NOAA Atlas 14 as design storms. The precipitation depths of these design storms will be defined from the NOAA Atlas 14 web site. The Panel recognizes that changes in the duration and/or structure of the design storm used as an input to the WinTR-20 produces significant changes in the magnitude of the peak discharge and shape of the runoff hydrograph. More research is needed to finalize a synthetic storm structure and duration to be used for specific frequencies and locations in Maryland. Until new research on storm structure is complete, the designer should use design storms developed in WinTR-20 or GISHydro from NOAA Atlas 14 data. Twelve- and 6-hour durations may be developed from data contained in the 24-hour storm distribution. Table 1.1 shows the acceptable storm durations that may be used to calibrate the WinTR-20 model and develop final design peak discharges. The storm duration selection is based on the total time-of-concentration (T_c) to the point of study. In general, the duration of the design storm should in no case be less than the total T_c of the watershed.

Table 1-1: Acceptable Storm Durations (hrs) for Total Watershed T_c

| Time of Concentration | Return Period | | | | | | |
|-----------------------|---------------|---------|---------|--------|--------|--------|---------|
| | 2-yr | 5-yr | 10-yr | 25-yr | 50-yr | 100-yr | >100-yr |
| <6 hrs | 6/12/24 | 6/12/24 | 6/12/24 | 12/24 | 12/24 | 12/24 | 24 |
| 6-12 hrs | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 24 |
| 12-24 hrs | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| >24 hrs | 24*/48 | 24*/48 | 24*/48 | 24*/48 | 24*/48 | 24*/48 | 24*/48 |

*If T_c is less than 36 hours, the engineer may choose the 24-hour duration

An example of development of 6-hour and 12-hour duration design storms for Howard County, Maryland is presented in Appendix 7. A spreadsheet was developed to calculate the 6, 12, and 24-hour storm distributions for locations within Maryland. In all instances, the hyetograph time increment, Δt , shall not exceed 6 minutes (0.1 hour).

Intensity-Duration-Frequency (IDF) curves are developed from point measurements. The spatial distribution of rainfall within a storm generally produces an average depth over an area that is a function of watershed area and storm duration. Figure 3.10, reproduced from USWB-TP-40, illustrates this phenomenon. The Panel recommends that the hydrologist adjust the design storm rainfall to reflect spatial distribution. If the hydrologist is using GISHydro, the adjustment is automatic. If the hydrologist is conducting a study outside the GISHydro environment, the adjustment for spatial distribution should be made using the graph in Figure 3.10.

The NRCS presents runoff curve numbers for many hydrologic soil-cover complexes as a range covering “good”, “fair” and “poor” – conditions that may be difficult to determine. Also, as discussed in Chapter 3, the assumption that $I_a = 0.2S$ is fundamental in the calculation of runoff volume in terms of a Runoff Curve Number (RCN). Figure 10-1 of USDA-NRCS-NEH, Part 630, Chapter 10, (2004) presented in this report as Figure 3.2, shows that there is significant scatter in the data used to support the assumption that $I_a = 0.2S$. Thus, the Panel recommends that the designer be granted a reasonable degree of latitude in the selection of RCN values for individual land parcels during the calibration process providing the values remain within the range recommended by NRCS and the decision be justified in writing. Adjustments must be made on a parcel-by-parcel basis and cannot be made by simply changing the overall watershed RCN.

The commonly used peak rate factor of 484 in NRCS dimensionless unit hydrograph (DUH) is known to vary for different terrain. For streams in the Eastern and Western Coastal Plain Regions, a peak rate factor of 284 is recommended. The peak rate factor of 284 was determined to be applicable to the flatter watersheds in the Eastern Coastal Plain Region. However, some watersheds in the Western Coastal Plain Region have watershed characteristics that deviate significantly from the Eastern Coastal Plain streams. For those watersheds, a peak rate factor of 484 is more appropriate. The designer will use the peak rate factors as shown in Table 3.1.

The NRCS lag equation to estimate the time of concentration should not be used on watersheds having drainage areas in excess of five square miles. The hydraulic length in the equation should be longer than 800 feet because shorter lengths result in artificially short lag times.

The lag equation is not included as a recommended procedure in USDA-NRCS, WinTR-55, “Small Watershed Hydrology” (2009). Thus, the Panel recommends that the lag equation not be used in urban (≥ 10 percent impervious) watersheds until additional

research becomes available. It should be noted that the lag equation was developed using data from agricultural watersheds.

The Panel recommends that the velocity approach of NRCS be used to estimate the time of concentration in urban and suburban watersheds. A regression equation described in Appendix 6 can be used to evaluate the reasonableness of the time of concentration estimate by the velocity method. The NRCS velocity approach is based on estimating the travel times of the three segments of flow – overland, shallow concentrated, and open channel – through the watershed. The NRCS kinematic wave equation should be used to estimate time of overland flow travel with a maximum flow length of 100 feet. Because the quantity of flow and, therefore, the hydraulics are different for each storm frequency it is logical to expect that the time of concentration will be different for a 2-year storm than for a 100-year storm. The Panel recommends that bankfull conditions that many consider to approximate the 2-year storm conditions be used to estimate the time of travel through the main channel.

Use GISHydro or 1:24,000 scale USGS 7.5-minute quadrangle sheets or more detailed topographic maps to estimate channel length. It is recognized that this scale cannot adequately represent meanders and, therefore, estimated length may be too short and slope too steep. When field investigations or more detailed maps indicate that such is the case, the designer may increase the estimated length, providing the increase is justified in writing.

It is difficult to estimate the correct Manning roughness coefficient. Variations in the estimate of the Manning roughness can produce significant changes in the time of concentration and, therefore, the estimated peak discharge. The designer should exercise extreme care in estimating the main channel roughness and use discharge comparisons with the regression equations to improve the estimates.

As stated earlier, velocities at “bankfull” conditions are to be used in estimating the time of travel through the main channel. Selection of the representative bankfull hydraulic radius is difficult because the bankfull cross-section varies along the length of the channel. A “best estimate” should be made using field and map investigations and then brought into agreement with the calibration window through corrections justified by additional field and/or map investigations.

When the watershed is divided into sub-basins, the routing cross sections and the channel and overbank roughness coefficients are difficult to estimate and can have a significant impact on the attenuation simulated by the routing procedure. The hydrologist must select a routing cross section that is representative of the overall channel length. The digital terrain modeling capabilities of GISHydro provide a rapid way to explore the variations of cross sections along the channel.

In situations where errors can result in loss of life or major economic damage, routing cross sections should be developed through detailed mapping along the stream.

When the economics of a project do not justify detailed surveys along the length of a stream, reasonable modeling results can be produced with:

- Bankfull cross sections developed from regional regression equations that relate channel depth and width to the drainage area above the cross section; (Equations for use in Maryland are presented in Appendix 4.)
- Routing sections developed by drawing perpendicular transects to the channel across the contours, as is the approach followed by GISHydro;

Regression equation and map transect estimates of cross sections should be supported by field investigations to ensure that the sections are realistic for the watershed involved.

If there are culverts or other storage producing structures along the stream, the attenuation should be reflected in the inputs to the WinTR-20.

Where available, comprehensive planning maps, as opposed to zoning maps, should be used to predict future land cover. The planning maps incorporate key elements of time and spatial distribution that are not apparent on zoning maps.

1.2 RATIONALE

1. Each watershed will be analyzed by two widely accepted approaches, one statistical (local gage or regional regression equations) and one deterministic (WinTR-20 or equivalent). In the past the effort associated with such an approach would have been prohibitive. With the current capabilities of GISHydro that includes delineation of the watershed boundaries, curve number computation and direct interfaces with both the regression equations and WinTR-20, the tasks can be performed in considerably less time than was required by conventional techniques.
2. Studies have shown that uncalibrated WinTR-20 models often predict peak discharges that are not consistent with the peak discharges that have been observed at Maryland stream gages. A major contributor to this problem is the fact that it is very difficult to select the curve number, the Manning roughness coefficients and the “typical” cross sections that represent the watershed conditions. Small errors in the selection of these parameters can lead to incorrect estimates of the volume of runoff, time of concentration, storage attenuation and, therefore, lead to peak flow predictions that are too high or too low. Calibration against a USGS gage, or regression equations that are based on statistical analyses of USGS stream gages, can aid the designer in the selection of appropriate hydrograph input parameters that will usually produce estimated peaks that are

consistent with Maryland conditions. The calibration will also provide confidence that the WinTR-20 is not over predicting to cause unnecessary construction costs and not under predicting to cause unnecessary flooding risks.

3. The recommended procedures are consistent with accepted practice, especially with AASHTO (1991) that states, “What needs to be emphasized is the need to calibrate to local conditions. This calibration process can result in much more accurate and consistent estimates of peak flows and hydrographs... Should it be necessary to use unreasonable values for variables in order for the model to produce reasonable results, the model should be considered suspect and its use carefully considered.” An example of an inappropriate use of the WinTR-20 would be to use an NRCS dimensionless hydrograph peak factor of 484 on the Eastern Shore of Maryland where the recommended peak factor is 284.
4. The recommended procedure is to make use of the USGS stream flow records or regional regression equations as the cornerstone for calibrating the hydrograph model. Using the statistics-based methods ensures that the deterministic model provides a realistic representation of existing watershed conditions. Once confident that the WinTR-20 model represents the existing conditions, the designer can vary the input parameters to simulate changes in the land cover and drainage network associated with ultimate development and be fairly confident in the final results.
5. It is not the intent of this report to recommend that the calibration of the deterministic model be accomplished at the upper bound of the calibration window. Rather, the prediction limits can be used to provide an indication of the level of risk associated with the discharge selected. Assuming that the regional regression equation estimates are unbiased, 50% percent of the peaks measured on watersheds having these characteristics will be higher and 50% will be lower than the expected value. Approximately 68% of the peak discharges will fall between plus and minus one standard error of the expected value. Thus, there is an approximately 84% chance that the peak discharge for this type of watershed will not exceed that indicated by the upper bound. Similarly, there is an 84% chance that a measured peak flow for this type of watershed will be greater than that indicated by the lower bound. **For purposes of “calibrating” the WinTR-20 model, the model parameters can be adjusted, within the bounds of sound hydrologic practice, so the estimated flood discharge falls within a calibration window defined by the regression estimate (expected value) and the upper bound of plus one standard error of prediction.**

1.3 NEED FOR CONTINUING RESEARCH

As described in Chapter 7 of this report, there are many areas of hydrology that require additional research if we are to improve our confidence in the modeling process. It is

imperative that a continuing, well-conceived and adequately funded research program be implemented to address a number of problems, especially,

1. Improving the structure and duration of the design storms;
2. Using the time-area curve available from the digital terrain data to generate geomorphic unit hydrographs that are unique for the watershed being modeled;
3. Until procedures for the future use of geomorphic unit hydrographs can be implemented, research must continue on the regionalized peak factors to be used with the NRCS dimensionless unit hydrograph;
4. Improving methods for estimating times of travel through the watershed;
5. Peak discharge transposition of gaging station data;
6. Developing improved regression equations for estimating the 2- to 500-year peak discharges for rural and urban streams in Maryland;
7. Developing guidelines for estimating NRCS runoff curve number from information on planning and zoning maps;
8. Developing improved guidelines for selecting concurrent return periods for storm surge and riverine peak discharge;
9. Planning for climate change in terms of both tidally-influenced systems affected by sea level rise and in riverine systems where precipitation intensity-duration-frequency is anticipated to change.

CHAPTER TWO

2 Statistical Methods for Estimating Flood Discharges

2.1 INTRODUCTION

The Maryland State Highway Administration (SHA) has a long history of using statistical methods for estimating flood discharges for the design of culverts and bridges in Maryland. SHA has funded five regional regression studies over the last 35 years: Carpenter (1980), Dillow (1996), Moglen and others (2006), the revised regression equations documented in Appendix 3 of the September 2010 version of the Hydrology Panel report, and the revised equations in this report.

Carpenter (1980) developed regression equations for three hydrologic regions (North, South and Eastern) in Maryland by relating flood discharges based on Bulletin 17A (U.S. Water Resources Council, 1977) at 225 rural gaging stations (114 in nearby states) to watershed and climatic characteristics. Carpenter (1980) also used short-term rainfall-runoff data collected at eight small stream sites to calibrate a watershed model and simulate annual peak discharges at these stations using long-term rainfall data. The simulated annual peak discharges were analyzed using Bulletin 17A guidelines to estimate the design flood discharges at each station. For 17 other small stream stations in the Appalachian Plateau and Piedmont Regions with only observed data for the period 1965-76, Carpenter adjusted the flood discharges based on comparisons to nearby long-term stations to be more representative of a longer period of record.

Dillow (1996) developed regression equations for five hydrologic regions in Maryland (Appalachian Plateau, Blue Ridge, Piedmont, Western and Eastern Coastal Plains, see Figure 2.1). Dillow's study superseded the study by Carpenter (1980). Dillow (1996) used flood discharges based on Bulletin 17B estimates (Interagency Advisory Committee on Water Data (IACWD), 1982) at 219 rural gaging stations (112 in nearby states) in developing his regression equations. Dillow (1996) also utilized the rainfall-runoff estimates for the small watersheds that were developed by Carpenter (1980). He chose not to use Carpenter's (1980) adjusted design discharges for the small watersheds with observed data for the period 1965-76 but used design discharges based on the observed short-term record.

Moglen and others (2006) evaluated three approaches for regional flood frequency analysis using data for rural and urban ($\geq 10\%$ impervious) gaging stations: the Fixed Region approach, the Region of Influence method (Burn, 1990) and regional equations based on L-Moments (Hosking and Wallis, 1997). The Fixed Region approach is analogous to the approach taken by Carpenter (1980) and Dillow (1996) where regression

equations are developed for a fixed geographic region and are based on Bulletin 17B estimates at the gaged sites. For the Region of Influence approach, regression equations are based on gaging stations that have the most similar watershed characteristics as the ungaged site of interest. There are no geographic flood regions and the regression equations are different for each ungaged site. For the gaged sites, flood discharges based on Bulletin 17B guidelines were used in the Region of Influence analysis. The L-Moment approach (Hosking and Wallis, 1997) uses linear moments, a linear combination of the untransformed annual peak discharges (not the logarithms), to estimate the parameters of the frequency distribution. Several frequency distributions can be used in the L-Moment approach, but the Generalized Extreme Value distribution was shown to be most appropriate for Maryland streams. For estimation at an ungaged site, the L-Moment approach is analogous to an index flood approach where the mean annual flood is estimated from a regression equation based on watershed characteristics and design discharges such as the 100-yr discharge, are estimated as a ratio to the mean annual flood.

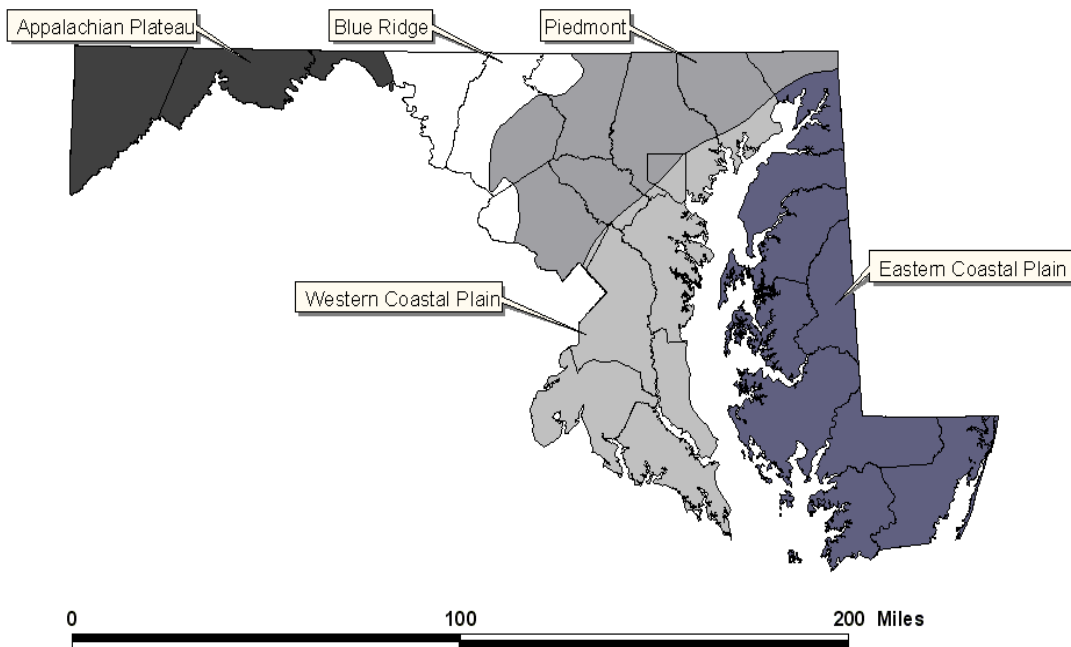


Figure 2-1: Hydrologic Regions Defined by Dillow (1996) and Used by Moglen and others (2006) and Thomas and Moglen (2015)

Carpenter (1980) and Dillow (1996) used the generalized skew maps in Bulletins 17A and 17B (same map) in developing the weighted skew estimates in defining the design discharges at the gaging stations. Moglen and others (2006) developed new estimates of generalized skew as described later and illustrated that these estimates of generalized skew were more accurate than those from the Bulletin 17B map.

Moglen and others (2006) compared estimates of flood discharges from the Fixed Region, Region of Influence, and L-Moment methods to Bulletin 17B estimates at the gaged sites and determined that the Fixed Region approach was most accurate. The Fixed

Region approach uses the five hydrologic regions shown in Figure 2-1 plus there are separate rural and urban equations for the Piedmont Region (a total of six sets of equations). The Fixed Region regression equations developed by Moglen and others (2006) were included in Appendix 3 of the August 2006 version of the Hydrology Panel report.

For the September 2010 version of the Hydrology Panel report (Third Edition), the Fixed Region regression equations were revised for the Eastern and Western Coastal Plain regions using recently released SSURGO soils data. In addition, the rural gaging stations in the Piedmont and Blue Ridge Regions (see Figure 2-1) were combined to better define the region influenced by karst geology. The regression equations for the urban watersheds in the Piedmont Region and the regression equations for the Appalachian Plateau were not revised. The Fixed Region regression equations are described in Appendix 3 of the September 2010 version of the Hydrology Panel report.

Thomas and Moglen (2015) developed revised regression equations for the Piedmont, Blue Ridge and Appalachian Plateau Regions based on annual peak flow data through the 2012 water year. The Piedmont-Blue Ridge Regions were combined into one region with one set of regression equations for both rural and urban watersheds. The regression equations were also updated for the Appalachian Plateau Region. The revised regression equations from Thomas and Moglen (2015) are described in detail in Appendix 3 of this report.

The physiographic regions shown in Figure 2-1 appear as crisp lines separating one region from another, and thus one set of regression equations from another. Engineers should exercise caution when analyzing watersheds near these physiographic boundaries. For instance, the Fall Line, which separates the Piedmont from the Western Coastal Plain region, is more appropriately considered a region of some width, rather than a crisp line. Within this area close to physiographic region boundaries it is possible for a watershed that is strictly located within one region to exhibit flood behavior more consistent with the neighboring physiographic region. In GISHydro, the software automatically detects if the watershed comes within 5 km of the physiographic boundary and prints a warning if this is the case. Similarly, in the Blue Ridge and Piedmont physiographic regions, underlying limestone geology is a predictor variable. The location of this limestone cannot be known with precision. In GISHydro, the software automatically detects if the watershed comes within 1 km of the limestone geology boundary and prints a warning if this is the case.

2.2 FLOOD DISCHARGES AT GAGING STATIONS

Estimates of design discharges, such as the 100-year flood discharge, are made at gaging stations where there is at least 10 years of annual peak discharges by using Bulletin 17B (IACWD, 1982). These guidelines are used by all Federal agencies and several state and local agencies for flood frequency analysis for gaged streams. Bulletin 17B guidelines include fitting the Pearson Type III distribution to the logarithms of the annual peak

discharges using the sample moments to estimate the distribution parameters and provide for (1) outlier detection and adjustment, (2) adjustment for historical data, (3) development of generalized skew, and (4) weighting of station and generalized (regional) skew.

Computer programs for implementing Bulletin 17B guidelines and the new Bulletin 17C guidelines are available from the U.S. Army Corps of Engineers (USACE) (HEC-SSP Statistical Software Package, User's Manual, Version 1.1, 2009) and the U.S. Geological Survey (USGS) (Program PEAKFQ User's Manual, Flynn and others, 2006). Annual peak discharges for approximately 200 gaging stations in Maryland are available from the USGS over the World Wide Web at <http://water.usgs.gov/md/nwis/sw>. The annual peak data and the available computer programs can be used to estimate design discharges for Maryland streams.

If the gaged watershed has undergone significant change during the period of record, the annual peak data may not be homogeneous. The user should ensure that the data are homogeneous, and exhibit no significant trends due to land-use change before performing the frequency analysis. A simple way to check on this is to plot the annual peak discharges versus time and determine if there are any noticeable trends in the data. These plots are available on the USGS NWIS web site. Statistical procedures for performing a more quantitative evaluation of trends and non-homogeneity in flood data are discussed by Pilon and Harvey (1992), McCuen and Thomas (1991) and McCuen (1993). The Mann-Kendall test for trend is available in the latest versions of the PeakFQ and HEC-SSP programs.

For the 2015 update of the regression equations, the regression equations for the Eastern and Western Coastal Plain Regions were not updated. Therefore, the regional skews for the Eastern and Western Coastal Plain Regions are still current. For the Eastern Coastal Plain, a regional skew of 0.45 with a standard error of 0.41 is still applicable. For the Western Coastal Plain, a regional skew of 0.55 with standard error of 0.45 is still applicable. For the 2015 update of the regression equations for the Piedmont, Blue Ridge and Appalachian Plateau Regions, a regional skew of 0.43 and a standard error of 0.42 were used as described in Appendix 3 of this report.

Watershed characteristics for 186 gaging stations are given in Appendix 1. Flood discharges for the 1.25-, 1.50-, 2-, 5-, 10-, 25-, 50-, 100-, 200- and 500-year peak discharges at 186 gaging stations in Maryland and Delaware are given in Appendix 2. The flood discharges for the Piedmont, Blue Ridge and Appalachian Plateau are based on annual peak data through the 2012 water year. For the Eastern Coastal Plain, the flood discharges are based on annual peak data through the 2006 water year. For the Western Coastal Plain, the flood discharges are based on annual peak data through the 2008 water year. Estimates of design discharges are available in Appendix 2 to those users who choose not to perform their own Bulletin 17B analysis. The watershed characteristics in Appendix 1 and the flood discharges in Appendix 2 were used to develop the Fixed

Region regression equations provided in Appendix 3. **The Fixed Region regression equations given in Appendix 3 of this report are recommended for use in Maryland and supercede previous regression equations.**

If the watershed characteristics of the gaging station are similar to those used in deriving the regression equations, then the best estimate of design discharges at the gaging station is considered to be weighted estimates based on gaging station data and the Fixed Region regression estimates. The procedures for weighting the gaging station and regression estimates are described below.

In accordance with Appendix 8 of Bulletin 17B guidelines (IACWD, 1982), it is assumed that an estimate at a single gaging station is independent of the regional regression estimate. Assuming independence of estimates, Hardison (1976) has shown that a weighted estimate, obtained by weighting each estimate inversely proportional to its variance, has a variance less than either of the individual estimates. Hardison (1976) further demonstrated that weighting two estimates inversely proportional to their variances was comparable to weighting by the equivalent years of record. The following weighting equation described by Dillow (1996) should be used:

$$LQ_w = (LQ_g * N_g + LQ_r * N_r) / (N_g + N_r) \quad (2.1)$$

where LQ_w is the logarithm of the weighted peak discharge at the gaging station, LQ_g is the logarithm of the peak discharge at the gaging station based on observed data, LQ_r is the logarithm of the peak discharge computed from the appropriate Fixed Region regression equation, N_g is the years of record at the gaging station, and N_r is the equivalent years of record for the Fixed Region regression estimate.

The equivalent years of record of the regression estimate is defined as the number of years of actual streamflow record required at a site to achieve an accuracy equivalent to the standard error of prediction of the regional regression equation. The equivalent years of record (N_r) is computed as follows (Hardison, 1971):

$$N_r = (S/SE_p)^2 R^2 \quad (2.2)$$

where S is an estimate of the standard deviation of the logarithms of the annual peak discharges at the ungaged site, SE_p is the standard error of prediction of the Fixed Region regression estimates in logarithmic units, and R^2 is a function of recurrence interval and skewness and is computed as (Stedinger and others, 1993):

$$R^2 = 1 + G * K_x + 0.5 * (1 + 0.75 * G^2) * K_x^2 \quad (2.3)$$

where G is an estimate of the average skewness for a given hydrologic region, and K_x is the Pearson Type III frequency factor for recurrence interval x and skewness G . Average skewness values G were defined using design discharges for each region as follows: 0.39

for the Appalachian Region, 0.48 for the rural and urban watersheds in the Blue Ridge and Piedmont Regions, 0.513 for the Western Coastal Plain Region and 0.484 for the Eastern Coastal Plain Region.

In order to estimate the equivalent years of record at an ungaged site, the standard deviation of the logarithms of the annual peak discharges (S in Equation 2.2) must be estimated. Average values of S were computed for each region and are as follows: 0.235 log units for the Appalachian Region, 0.309 log units for the Western Coastal Plain Region, and 0.295 log units for the Eastern Coastal Plain Region. The standard deviation (S in log units) varied as a function of watershed characteristics for the Piedmont-Blue Ridge Region and is estimated with the following equation:

$S = 0.24862 - 0.05379 \cdot \log(DA) + 0.09843 \cdot \log(FOR + 1) - 0.0297 \cdot \log(IA + 1)$ where DA is the drainage area in square miles, FOR is the forest cover in percent and IA is the impervious area in percent.

A computer program, developed by Gary Tasker, USGS, and modified by Glenn Moglen, Virginia Tech, can be used to compute the weighted estimate given in equation 2.1 and for determining the equivalent years of record, and standard errors of prediction for these estimates. The equivalent years of record for the weighted estimate is assumed to be $N_g + N_r$ (see Equation 2.1), the sum of the years of gaged record and equivalent years of record for the regression estimate. The Tasker program was updated to use the Fixed Region regression equations shown in Appendix 3.

An example of computing a weighted estimate at a gaging station, Youghiogheny River near Oakland, Maryland (station 03075500), a 134.2-square-mile rural watershed Appalachian Plateau Region is illustrated below. The flood discharges for station 03075500 (Q_g in cfs) based on 72 years of record are taken from Appendix 2 and are given in Table 2.1. Also provided in Table 2.1 are the Fixed Region (Appalachian Plateau Region) regression estimates (Q_r in cfs) at station 03075500.

Table 2-1: Flood Frequency Estimates for Youghiogheny River near Oakland, Maryland (station 03075500) based on Gaging Station data, Regression Equations and a weighted estimate.

| Return period (years) | Station (Q_g) (cfs) | Regression (Q_r) (cfs) | Weighted (Q_w) (cfs) |
|--------------------------|----------------------------|-------------------------------|-----------------------------|
| 2 | 4,280 | 3,230 | 4,180 |
| 10 | 8,580 | 6,830 | 8,290 |
| 25 | 11,400 | 9,700 | 11,100 |
| 50 | 13,900 | 11,300 | 13,400 |
| 100 | 16,700 | 13,700 | 16,200 |
| 500 | 24,600 | 20,400 | 23,900 |

The Fixed Region regression estimates in log units (LQr) are weighted with the station estimates in log units (LQg) using Equation 2.1. The weighting factors are the years of record at station 03075500 (Ng = 72) and the equivalent years of record (Nr) for the regression equations that are computed from the Tasker Program. The weighted estimates are shown in Table 2-1. For example, the 100-yr weighted estimate is computed from Equation 2.1 as follows using the logarithms of the flood discharges:

$$LQ_w = (LQ_g * N_g + LQ_r * N_r) / (N_g + N_r) = (4.222716 * 72 + 4.136721 * 13.7) / (72 + 13.7) = 4.208969 \text{ log units, where } Q_w = 16,200 \text{ cfs.}$$

The equivalent years of record for the weighted estimate is assumed equal to the sum of the observed record length (72 years) and the equivalent years of record from the regression equation (13.7 years). Therefore, for the 100-yr weighted estimate, the equivalent years of record are 85.7 years.

Figure 2-2 illustrates the process of weighting station data with the regional regression estimates.

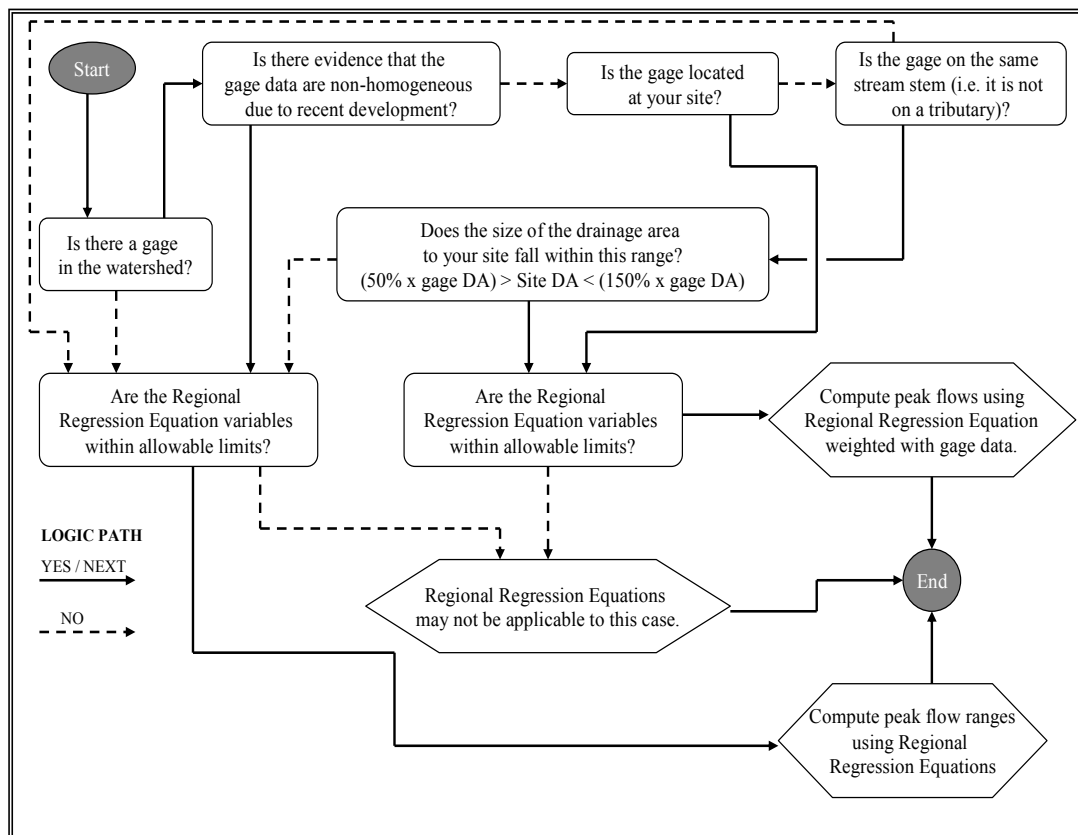


Figure 2-2: Fixed Region Regression Equation Flow Chart

2.3 ESTIMATES FOR UNGAGED SITES NEAR A GAGING STATION

Procedures described by Dillow (1996) are recommended for obtaining estimates of design discharges for ungaged sites that are on the same stream as the gaging station, have similar watershed characteristics as the gaging station and are within 50 percent of the drainage area of the gaging station. Data shown in Appendix 1 can be used to determine if the gaged stream has watershed characteristics similar to those used in developing the regression equations. The procedure involves three steps:

1. Compute the ratio (R) of the weighted estimate to the Fixed Region regression estimate at the gaging station

$$R = Q_w / Q_r \quad (2.4)$$

where Q_w and Q_r are the weighted and regression estimates in cfs.

2. Scale the ratio R based on the difference in drainage area between the ungaged site and the gaging station using the following equation (Sauer, 1974):

$$R_w = R - ((2|A_g - A_u|) / A_g) * (R - 1) \quad (2.5)$$

where R_w is the scaled ratio, A_g is the drainage area in square miles at the gaging station and A_u is the drainage area in square miles at the ungaged location.

3. Compute the final estimate (Q_f) at the ungaged site as

$$Q_f = R_w * Q_u \quad (2.6)$$

where Q_u is the Fixed Region regression estimate in cfs at the ungaged site.

Equation 2.5 was developed with the limiting assumption that estimates would only be extrapolated upstream and downstream on the same stream to 0.50 or 1.50 times the drainage area of the gaging station. If Equation 2.5 is used beyond these limits, then irrational results may be obtained. If the gaged watershed has undergone significant change during the period of record, then the annual peak data may not be homogeneous and the extrapolation procedure may not be appropriate.

In the case where the ungaged site is between two gaging stations, estimates of Q_g should be obtained by interpolating between the two gaging stations on the basis of a logarithmic plot of peak discharge versus drainage area. An estimate of N_g is obtained as an arithmetic average of the record length at the two gaging stations using the differences in drainage area between the ungaged site and the gaging stations as the weighting factor.

The values of LQ_g and N_g so obtained should be used in Equation 2.1 to get a final weighted estimate for the ungaged site.

The weighted estimates at the Youghiogheny River near Oakland, Maryland (shown in Table 2-1), where the drainage area is 134.2 square miles, are extrapolated upstream to an ungaged location where the drainage area is 89.7 square miles. For this procedure to be applicable, the watershed characteristics at the ungaged site should be similar to those at the gaged site. For this example, the weighted (Q_w) and regression (Q_r) 100-yr flood discharge at station 03075500 are 16,200 and 13,700 cfs, respectively, and the regression estimate (Q_u) at the ungaged location is 10,300 cfs. The adjusted 100-yr flood discharge at the ungaged location on the Youghiogheny River is computed to be 10,900 cfs using Equations 2.4 to 2.6 as follows:

$$R = Q_w/Q_r = 16,200/13,700 = 1.18248$$

$$\begin{aligned} R_w &= R - [((2|A_g - A_u|)/A_g) * (R - 1)] \\ &= 1.18248 - [((2|134.2 - 89.7|)/134.2) * (0.18248)] = 1.06146 \end{aligned}$$

$$Q_f = R_w * Q_u = 1.06146 * 10,300 = 10,900 \text{ cfs.}$$

The equivalent years of record are 71.4 years for the 100-yr flood discharge at the ungaged location. This value is interpolated between 85.7 years for the weighted station data at 134.2 square miles and 13.7 years for the Fixed Region regression equation estimate at 0.5 times the gaged drainage area (at 67.1 square miles). The computation is $85.7 - ((85.7 - 13.7) * 44.5 / 67.1) = 37.9$ years.

2.4 ESTIMATES AT UNGAGED SITES

Fixed Region regression equations given in Appendix 3 can be used for estimating the 1.25-, 1.50-, 2-, 5-, 10-, 25-, 50-, 100-, 200- and 500-year peak discharges for rural and urban watersheds in Maryland which are not significantly affected by detention storage, urbanization, tidal marshes or changing land-use conditions such as mining, excavation or landfill activities. Equations applicable to urban watersheds are available for just the Western Coastal Plain and Piedmont and Blue Ridge Region.

In addition, the watershed characteristics for the site of interest should be within the range of the watershed characteristics of the gaging stations used in the regional analysis. Watershed characteristics used in the development of the Fixed Region regression equations are given in Appendix 1. These data can be used to determine if the ungaged site has similar watershed characteristics as those used in developing the regression equations.

A computer program, developed by Gary Tasker, USGS, was modified by Glenn Moglen, Virginia Tech, to facilitate the estimation of flood discharge estimates at ungaged sites using the Fixed Region regression equations documented in Appendix 3. The equivalent

years of record, the standard errors of prediction and prediction intervals are also computed for these estimates using the Tasker program.

The standard error of prediction for the ungaged site is computed as the sum of the model and sampling error as described by Hodge and Tasker (1995). Given the standard error of prediction for an ungaged site, the equivalent years of record are computed by Equation 2.2. Prediction intervals are then computed as:

$$\log Q_x + T(c/2, n-p) \times [SE^2(1+h_o)]^{0.5} \quad \text{upper value} \quad (2.7a)$$

$$\log Q_x - T(c/2, n-p) \times [SE^2(1+h_o)]^{0.5} \quad \text{lower value} \quad (2.7b)$$

where Q_x is the flood discharge for recurrence interval x , T is the critical value of Student's t for a $100(1-c)$ percent prediction interval with $n-p$ degrees of freedom, n is the number of gaging stations used in the regression analysis, p is the number of explanatory variables in the Fixed Region regression equation, SE is the standard error of estimate in log units, and h_o is the leverage of the site. The standard error of prediction (SE_p) estimated by the Tasker program is more accurate than using the standard error of estimate given in Appendix 3. The standard error of estimate given in Appendix 3 is a measure of the variability of the station data about the regression equation and is less than the standard error of prediction which is a measure of how well the equations predict flood discharges at an ungaged site. The standard error of prediction includes both the variability about the regression equation and the error in the regression coefficients.

The leverage expresses the distance of the site's explanatory variables from the center of the convex data set (called the Regressor Variable Hull) defined by the explanatory variables in the regression analysis (Montgomery and Peck, 1982). The prediction intervals are directly related to the magnitude of the leverage for a given site. The leverage is computed as (**bold letters** denote a matrix):

$$h_o = x_o (\mathbf{X}^T \mathbf{X})^{-1} x_o^T \quad (2.8)$$

where x_o is a row vector of the logarithms of the explanatory variables at a given site, $(\mathbf{X}^T \mathbf{X})^{-1}$ is the covariance matrix of the regression parameters (T means transpose), x_o^T is a column vector of the logarithms of the explanatory variables at a given site.

Equations 2.7 and 2.8 and the data in Appendix 1 are used to compute the prediction limits in the Tasker program. For plus and minus one standard error of prediction, there is a 68 percent chance that the true discharge is between the upper and lower prediction limits.

The range of watershed characteristics for each hydrologic region is given in Table 2-2. The watershed characteristics were estimated using GIS data from several sources as described in Appendix 1. The Fixed Region regression equations for each hydrologic region are given in Appendix 3 along with the standard error of estimate and the

equivalent years of record. The Fixed Region regression equations are based on 28 stations in the Eastern Coastal Plain, 24 rural and urban stations in the Western Coastal Plain, 64 rural and 32 urban stations in the Piedmont and Blue Ridge, and 24 stations in the Appalachian Plateau. A total of 172 stations were used to derive the Fixed Region regression equations in Appendix 3.

In developing the Fixed Region regression equations, forest cover and impervious area near the midpoint of the period of systematic data collection were used for the urban watersheds. For gaging stations discontinued before 1999, forest cover and impervious area for the 1985 land use conditions were generally used. For the rural watersheds this is not an issue since forest cover and impervious area are not changing with time. In applying the regression equations, the analyst should use the current land use conditions to obtain estimates of the flood discharges for existing conditions.

For streams that cross regional boundaries, the regression equations for each region should be applied as if the total drainage area was in each region. These estimates should then be weighted by the percentage of drainage area in each region. The weighted flood frequency estimates can be obtained using GISHydro.

2.5 FUTURE RESEARCH TO IMPROVE REGRESSION EQUATIONS

The Fixed Region regression equations are applicable to both rural and urban watersheds in the Western Coastal Plains and Piedmont and Blue Ridge Regions. For the urban watersheds, a “relatively constant period of urbanization” was defined as a change in impervious area of less than 50 percent during the period of record. If a watershed had 20 percent impervious area at the beginning of record, it could have no more than 30 percent impervious area at the end of the time period (Sauer and others, 1983). The periods of record for a few urban stations were reduced to obtain a more homogeneous period of record with respect to land use. Several urban gaging stations were discontinued in the late 1980s and land use data for 1985 were considered most appropriate. Also, data collection began for several urban watersheds around 2000 and the time period of data collection was not long enough to show significant change in land use characteristics. For the recently established urban gaging stations, land use conditions in 2002 or 2010 were considered representative for the annual peak data. For future analyses, a more detailed approach should be developed for determining a homogeneous period for frequency analysis or for adjusting the annual peak data to existing conditions.

The Maryland Department of Planning (MDP) data were used to estimate land use conditions such as impervious area. The MDP approach is to assign a percentage of impervious area to various land use categories. For example, Institutional Lands are assigned an impervious area of 50 percent but there is considerable variation in impervious area for this land use category. Impervious area as estimated from the MDP data was statistically significant in estimating flood discharges for urban watersheds in the Western Coastal Plains and Piedmont and Blue Ridge Regions but this variable did

not explain as much variability as anticipated. For future regression analyses, more accurate or detailed measures of urbanization (impervious area, percentage of storm sewers, length of improved channels, etc.) should be used for characterizing urbanization and its affect on flood discharges. Improved measures of urbanization would likely provide more accurate regression equations in the future.

Many of the gaging stations on small watersheds (less than about 10 square miles) were discontinued in the late 1970s resulting in generally short periods of record for the small watersheds in Maryland. As described earlier, Carpenter (1980) and Dillow (1996) utilized estimates of flood discharges from a calibrated rainfall-runoff model for eight gaging stations in Maryland. Carpenter (1980) also adjusted flood discharges at 17 other small watersheds based on comparisons to nearby long-term gaging station data. Moglen and others (2006) utilized both of these adjustments in developing the Fixed Region regression equations that were documented in the August 2006 version of the Hydrology Panel report. For the 2015 analysis, Thomas and Moglen (2015) extended the record at four short-term stations using data at nearby long-term stations. In addition, Thomas and Moglen (2015) also defined frequency curves at eight stations using a graphical approach where the log-Pearson Type III distribution did not reasonably fit the annual peak data. There are many other short-record stations in Maryland for which no adjustment was made. For future regression analyses, a more systematic approach for adjusting the short-record stations should be developed. In addition, streamgaging activities should be resumed on several of the small watersheds where there are less than 15 years of record. Improving the data base of small watershed data would provide more accurate regression equations in the future.

Finally, only stations primarily in Maryland were used in developing the Fixed Region regression equations in Appendix 3 because the required land use data were not available in neighboring states. The exception was the inclusion of gaging stations in Delaware. More detailed land use data should be developed for the neighboring states like Pennsylvania, Virginia and West Virginia so that additional gaging stations could be included in the regional regression analyses.

Table 2-2: Range of Watershed Characteristics for Each Hydrologic Region in Maryland.

| Variable | Eastern Coastal Plain | Western Coastal Plain | Piedmont and Blue Ridge (Rural and urban) | Appalachian Plateau |
|-----------------------|-----------------------|-----------------------|---|---------------------|
| DA [mi ²] | 0.91 to 113.7 | 0.41 to 349.6 | 0.11 to 816.4 | 0.52 to 294.1 |
| S _A [%] | 0 to 78.8 | --- | --- | --- |
| IA [%] | --- | 0 to 36.8 | 0.0 to 53.5 | --- |
| S _{CD} [%] | --- | 13 to 74.7 | --- | --- |
| FOR [%] | --- | --- | 0.5 to 100 | --- |
| LIME [%] | --- | --- | 0.0 to 81.7 | --- |
| LSLOPE [ft/ft] | 0.0025 to 0.0160 | --- | --- | 0.06632 to 0.22653 |

| | |
|-----------------|---|
| DA | Drainage area in square miles measured on horizontal surface. |
| S _A | Percent of DA that is classified as NRCS Hydrologic Soil Group A based on SSURGO soils data. |
| IA | Percent of DA that is impervious as defined by the Maryland Department of Planning land use data. |
| S _{CD} | Percent of DA that is classified as NRCS Hydrologic Soil Group C and D based on SSURGO soils data. |
| FOR | Percent of DA land cover that is classified as forest cover. |
| LIME | Percent of DA that is underlain by carbonate rock (limestone and dolomite), from map given in Appendix 3. |
| LSLOPE | Average land slope of the watershed in feet per feet. |

Blank page inserted to preserve left-right pagination format.

CHAPTER THREE

3 Behavior of the WinTR-20 Model in Response to Uncertainties in the Input Parameters

3.1 OVERVIEW

The WinTR-20 model is a deterministic hydrologic model that synthesizes a single event runoff hydrograph as a function of a rainfall input and watershed characteristics. The model is designed to operate on a time varying rainfall to produce a hydrograph that simulates the role of the watershed area; land cover; hydrologic soil types; antecedent runoff conditions; topography; characteristics of the overland, shallow confined, and channel flow paths; and, storage attenuation such as that created by flood plains, wetlands, structures, and ponds. A single watershed can be modeled by inputting the drainage area, time of concentration, curve number and a time-intensity rainfall distribution. If the watershed is large or heterogeneous, it can be divided into a number of subwatersheds with their hydrographs attenuated by routing through the stream network that the user defines in terms of length, slope, roughness, cross-section and any storage elements or structures that may be distributed along its length.

Because the WinTR-20 model can simulate watershed conditions and changes in these conditions in terms of relatively simple input parameters, it continues to be the baseline for hydrologic analyses that require hydrographs for both existing and ultimate development conditions. The first step is to select model parameters that are consistent with established hydrologic practice and give a reasonable simulation of existing hydrologic conditions. After the user is satisfied that the model is satisfactory for existing watershed conditions, the curve number and flow network parameters can be changed to simulate the hydrologic response of the watershed under a future, or ultimate development, land cover distribution and drainage hydraulics.

The WinTR-20, like most deterministic hydrologic models, is quite sensitive to the values chosen for the input parameters. These sensitivities and the uncertainties surrounding their selection make it difficult to ensure that the WinTR-20 results are representative of all Maryland conditions. The tendency among designers has been to select parameters that lead to over-prediction in many cases. This is supported by U.S. Water Resources Council (1981) tests on ten procedures for estimating peak discharges for ungaged watersheds. Each procedure was applied by five persons at gaging stations with at least 20 years of observed peak-flow records. Based on 105 applications at 21 gaging stations in the Midwest and Northwest Regions of the country, it was found that the TR-20 model overestimated the 100-yr flood discharge by about 55%, the 10-yr discharge by about 60% and the 2-yr discharge by about 55%.

The Panel recognizes the parameter sensitivities of the WinTR-20 model and its tendency to over predict. However, the Panel has concluded that these problems can be overcome and that the WinTR-20 model can be a sound, dependable model for simulating existing and ultimate conditions for most watersheds provided that it is calibrated for local conditions. Calibration of all deterministic models is strongly recommended by AASHTO (1991, pgs. 7-17, 7-18). The Panel recommends that it become standard practice to require that the WinTR-20 be calibrated for existing watershed conditions against one of the USGS gage-based procedures of Chapter 2, provided that the watershed conditions are consistent with those above the USGS gage or the sample used to derive the approved regional regression equations. The approved regional regression equations are based on statistical analyses of stream gages in Maryland and adjacent states having record lengths between 10 and over 70 years. Thus, a successful calibration following the procedures outlined in Chapter 4 and Appendix 5 can produce reliable WinTR-20 peak discharges that are consistent with Maryland conditions.

In order to gain insight into the sensitivities associated with the TR-20 input parameters under Maryland conditions, the SHA sponsored a study by Ragan and Pfefferkorn (1992). This study entitled, "Analysis of the Role of Storm and Stream Parameters on the performance of SCS-TR-20 and HEC-1 under Maryland Conditions", was conducted on the 21.3 square mile Northwest Branch watershed in Montgomery County. The Northwest Branch was selected because it had been the subject of many studies by various organizations and, therefore, had an excellent database along with an established GIS that managed the land and stream elements of the watershed. There were 76 surveyed stream cross-sections along 71,000 feet of channel, detailed soil data, high-resolution color IR defined land cover and long term stream flow records. All these data were in digital formats and interfaced with a GIS. Most of the examples of hydrograph responses to variations in TR-20 input parameters that follow in Chapter 3 are from the Ragan and Pfefferkorn (1992) experiments.

The remaining sections of Chapter 3 discuss the issues that the Panel examined with respect to defining the input parameters to the WinTR-20 model. Chapter 4 and the appendices discuss procedures that will assist the WinTR-20 user in the selection of input parameters during the calibration process.

3.2 DRAINAGE AREA

The scale of the map can create an error in the estimate of the drainage area. Delineating on a small-scale map, such as 1:100,000, probably will not give the same drainage area as one would obtain from a 1:24,000 or 1:4,800 scale map. Normally, watersheds having drainage areas larger than one square mile will be delineated on a 1:24,000 scale USGS 7.5 minute quadrangle sheet. Special care must be exercised in flat terrain such as the Eastern Coastal Plain because of the wide spacing of contours and lack of definitive ridgelines.

Hydrologists and designers for Maryland projects frequently use GISHydro. GISHydro is a geographic information system that generates watershed boundaries and stream networks using USGS digital terrain data to automatically delineate drainage area boundaries. Two issues must be recognized with any automated drainage area delineation method. The first issue is training. The person using automated techniques must be thoroughly trained in the GIS software and familiar with the digital terrain data. The procedure can give excellent results, but if the user does not know what he or she is doing, significant errors can result. For example, if one tries to delineate a watershed that is too small - one containing only a few elevation points - the results will be very questionable. Figure 3-1, developed from a study by Fellows (1983), shows the percent difference between watershed areas manually delineated on paper 1:24,000 scale maps and those grown from digital terrain data as a function of the number of elevation points inside the boundary. A_M is the area determined “manually” by visually tracing the ridge lines on 1:24,000 scale maps. A_G is the area “grown” using the digital terrain data.

A second issue that must be recognized is resolution -- the spacing of the elevation points in the database. GISHydro provides 30-meter resolution digital terrain data for all of Maryland. There may be instances where the watershed boundary extends across a state boundary. In such an instance, the user might have to use data from another source that has a 90-meter resolution. The 90-meter data may not give the same level of accuracy as the 30-meter data. If the area of the watershed is incorrect, the peak discharge will be incorrect as well.

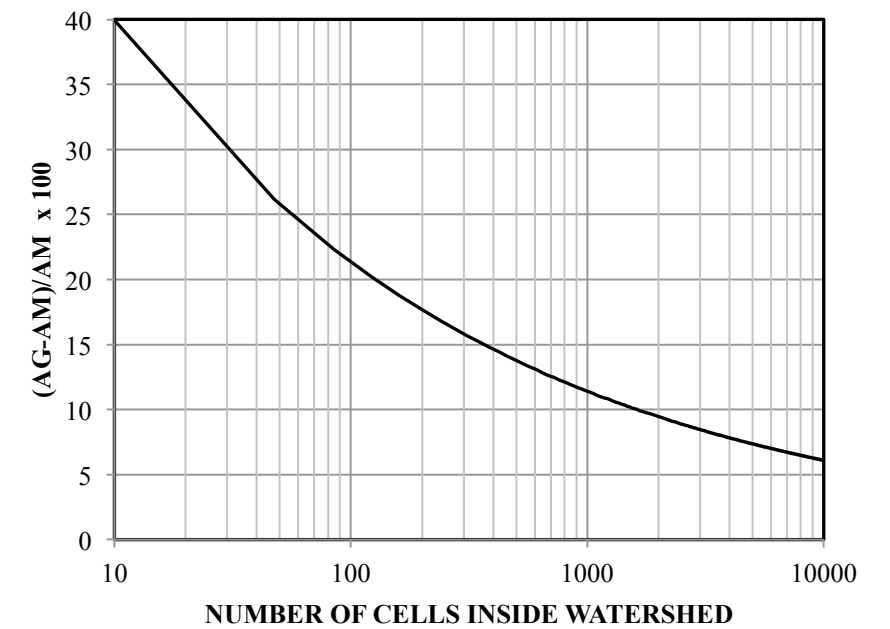


Figure 3-1: 99% Confidence Error Envelope for Difference between Manually and Automatically Defined Areas

It is emphasized that all watershed and subwatershed boundaries developed with GISHydro must be checked to ensure that there is good agreement with the areas obtained from more detailed topographic information.

3.3 VOLUME OF RUNOFF

A deterministic model must have a component that estimates the rainfall excess that becomes the volume of the runoff hydrograph. Thus, there must be a means to account for the interception, infiltration and depression storage processes that occur in the watershed. In the NRCS family of models, the rainfall excess is estimated by a Runoff Curve Number (RCN) that is a function of the land cover, the underlying soil type, and antecedent runoff conditions (ARC). Tables 2-2a thru 2-2d from U.S. Department of Agriculture (1986) are recommended for use in hydrologic analyses using the WinTR-20.

The rainfall excess, or volume of runoff under the hydrograph, is given by Equation 3.1

$$Q = \frac{(P - 0.2S)^2}{(P + 0.8S)} \quad (3.1)$$

where
$$S = \frac{1000}{RCN} - 10 \quad (3.2)$$

Tables 2a through 2d in TR-55 assign curve numbers in terms of “good,” “fair,” or “poor” condition in some of the land cover categories. First, it may be difficult for the designer to determine which of the conditions is appropriate for each land parcel in the watershed. Further, the curve numbers were derived using watershed data collected from across the United States. Thus, the specific curve number for a given soil-cover complex may or may not be appropriate for the particular Maryland watershed under investigation. Finally, Equation 3.1 is a simplification of

$$Q = \frac{(P - I_a)^2}{(P - I_a) + S} \quad (3.3)$$

where it is assumed that:

$$I_a = 0.2S \quad (3.4)$$

The data on which the assumption of Equation 3.4 is based, presented as Figure 10-1 in USDA- NRCS-NEH, 630, Chapter 10, (July 2004), are shown here as Figure 3.2.

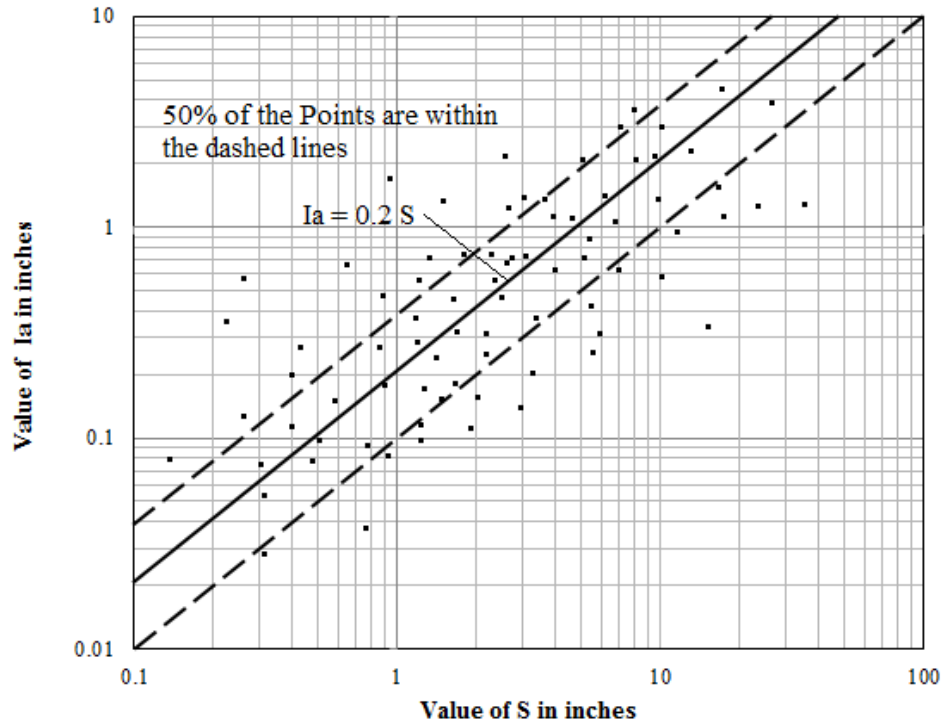


Figure 3-2: Relationship between I_a and S
 Plotted points are derived from experimental watershed data.
 (Source: Figure 10-1 of USDA-NRCS-NEH Part 630 Hydrology, Chapter 10)

The consequences of making an error in the determination of the weighted curve number for a natural watershed is illustrated by Figure 3-3 from Ragan and Pfefferkorn (1992).

The purpose of this Section 3.3, Volume of Runoff, is to encourage users of the WinTR-20 to recognize that estimating the volume of surface runoff using the curve number approach is an imperfect process. Thus, as described in Chapter 4, the Panel recommends that the user exercise a degree of flexibility in the selection of curve numbers to represent specific land/soil complexes provided that the basis for the decision is explained.

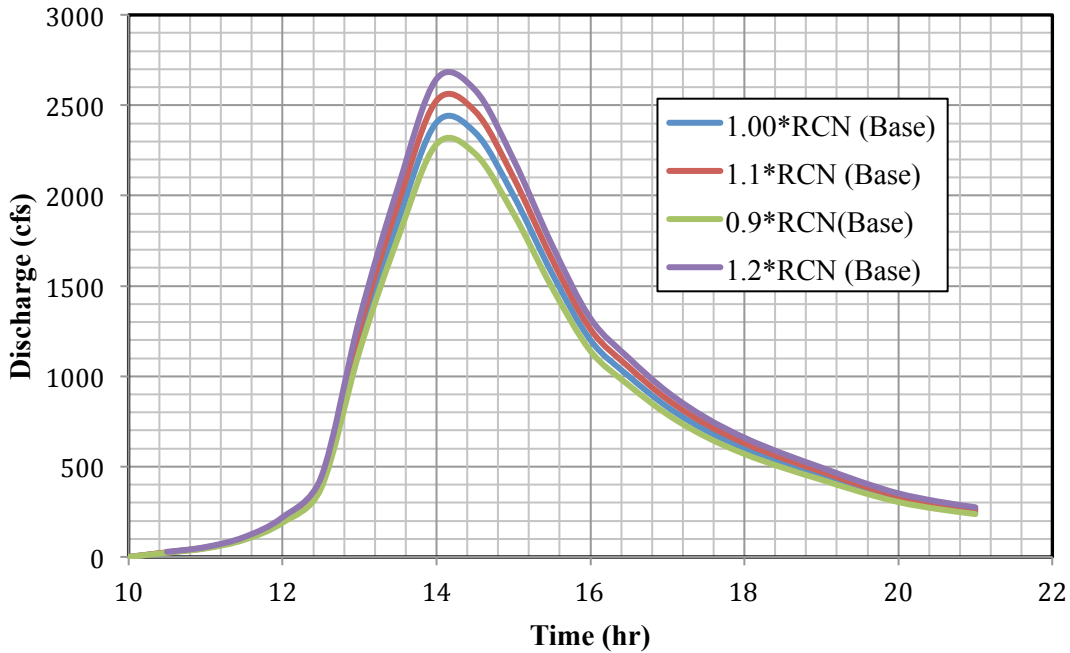


Figure 3-3: Hydrograph Response to Changing RCN

3.4 PEAK DISCHARGE AND SHAPE OF THE RUNOFF HYDROGRAPH

3.4.1 The Dimensionless Unit Hydrograph

A storm occurring on a low relief watershed with wide, flat streams will produce a long duration hydrograph with a low peak discharge in comparison with that generated by a high relief mountain basin having steep narrow channels. Many deterministic models, including the WinTR-20, simulate the interrelationships among the runoff processes through a unit hydrograph (UHG). If stream flow records are available for the subject watershed, the WinTR-20 allows a site specific UHG to be input. If possible, the derived site specific UHG should be used. However, the usual circumstance is to use the default dimensionless UHG built into the WinTR-20. While the NRCS dimensionless UHG is thoroughly discussed in Chapter 16 of NRCS-NEH Part 630, Hydrology, several issues are presented here for completeness.

The dimensionless UHG controls the shape and peak discharge of the runoff hydrograph using the drainage area, the volume of runoff, and the time of concentration as input parameters. NRCS-NEH Part 630, Hydrology gives the peak discharge of the unit hydrograph that the WinTR-20 convolutes with the time-distribution of rainfall excess as

$$q_p = 484 \frac{AQ}{T_p} \quad (3.5)$$

$$T_p = \frac{\Delta D}{2} + 0.6T_c \quad (3.5a)$$

where T_p is the time to peak. In Equation 3.5, Q is 1.0 inches because it is a unit hydrograph. Time to peak is a function of the duration of the unit excess rainfall, ΔD , and the time of concentration T_c as shown in equation 3.5a.

The constant value of 484 is the “peak rate factor.” NRCS-NEH Part 630, Hydrology points out that “this factor has been known to vary from about 600 in steep terrain to 100 in very flat swampy country.” A UHG with a peak rate factor of 284 has been used for some time on the flat watersheds of the Maryland Eastern Coastal Plain.

In the case of the Maryland Eastern Coastal Plain UHG, the lower peaking factor accounts for the greater storage and longer travel times of the flat wetlands often found on streams in that area. However, one must be aware that a peak flow rate can sometimes be effectively changed by subdividing the watershed into sub-basins and then routing the sub-basin hydrographs through the storage provided by the network of connecting streams. In general, models that have larger (more than one square mile) sub-basins should use the regional dimensionless unit hydrograph. In Maryland, these regional dimensionless unit hydrographs are currently being evaluated by the Hydrology Panel. Studies by the Hydrology Panel have indicated that watershed characteristics should be considered in determining the peak rate factor. Some watersheds in the Western Coastal Plain have steep slopes more similar to Piedmont watersheds and a peak rate factor of 484 may be more appropriate. Conversely, for flatter watersheds in the Piedmont region that are close to or cross into the Western Coastal Plain, a peak rate factor of 284 may be more appropriate. Until other values are published, the designer may use the peaking factor values for the Maryland Dimensionless Unit Hydrographs, shown in Table 3-1. The dimensionless unit hydrograph to be used when the peak factor is 284 is presented as Table 3-2.

Table 3-1: Unit Hydrograph Peak Rate Factors

| Region | Peak Rate Factor |
|-----------------------|------------------|
| Eastern Coastal Plain | 284 |
| Western Coastal Plain | 284 or 484 |
| Piedmont | 484 or 284 |
| Blue Ridge | 484 |
| Appalachian | 484 |

**Table 3-2: Dimensionless Unit Hydrograph
for Use When Peak Rate Factor (PRF) is 284**

| TITLE | DELMARVA | UNIT | HYD | PRF | NEAR | 284 |
|----------|----------|------|------|-----|------|-----------|
| 4 DIMHYD | | | .02 | | | |
| 8 | 0.0 | | .111 | | .356 | .655 .896 |
| 8 | 1.0 | | .929 | | .828 | .737 .656 |
| 8 | .584 | | .521 | | .465 | .415 .371 |
| 8 | .331 | | .296 | | .265 | .237 .212 |
| 8 | .190 | | .170 | | .153 | .138 .123 |
| 8 | .109 | | .097 | | .086 | .076 .066 |
| 8 | .057 | | .049 | | .041 | .033 .027 |
| 8 | .024 | | .021 | | .018 | .015 .013 |
| 8 | .012 | | .011 | | .009 | .008 .008 |
| 8 | .006 | | .006 | | .005 | .005 0.0 |
| 9 ENDTBL | | | | | | |

If a watershed falls within more than one region boundary, the WinTR-20 model can be split into appropriate parts with corresponding regional dimensionless unit hydrographs (DUH). If the WinTR-20 flood discharges agree with the regional estimates without use of two DUH, then no additional action is needed. If the WinTR-20 flood discharges are not within the calibration Window, subdivide watershed at the Fall Line and use the two DUH as appropriate. If a significant portion (75% or more) of the watershed falls within one region, then use that region’s dimensionless unit hydrograph.

In addition to the probable variation of the peak rate factor as a function of the watershed topography, it can also be seen from Equation 3.5 that the peak discharge of the UHG is a function of the time of concentration, T_c . As described later in this chapter, the time of concentration is difficult to define. Thus, the NRCS dimensionless or any other “nationally-derived” synthetic UHG defined in terms of a few parameters can create errors in the runoff estimate. In the future there may be approaches that allow the use of more site specific UHG’s, even when no stream flow records are available. Because of the availability of the USGS digital terrain data, the “geomorphic” UHG using a time-area-curve concept that tracks the flow path of each grid cell in the watershed should be a practical approach in the near future.

3.4.2 Time of Concentration and Lag

Definitions

Travel time is the time it takes for runoff to travel from one location in a watershed to another location downstream. Estimating travel time is complicated by the fact that it may occur on the surface of the ground or below it or a combination of the two. The *Time of Concentration* is the time required for runoff to travel from the hydraulically most distant part of the watershed to the outlet of the watershed. Recall that it is the time of concentration that is input to the WinTR-20 to define the peak discharge of the unit hydrograph from the dimensionless UHG. The *Lag* can be thought of as a weighted time

of travel. If the watershed is divided into increments, and the travel times from the centers of the increments to the watershed outlet are determined, then the lag is calculated as:

$$L = \frac{\sum a_i Q_i T_{ti}}{\sum a_i Q_i} \quad (3.6)$$

where: L is the lag time, in hours;
 a_i is the i^{th} increment of the watershed area, in square miles;
 Q_i is the runoff from area a_i , in inches;
 T_{ti} is the travel time from the center of a_i to the reference point, in hours.

NRCS-NEH Part 630, Hydrology provides the empirical relation

$$L = 0.6 T_c \quad (3.7)$$

where T_c is the time of concentration.

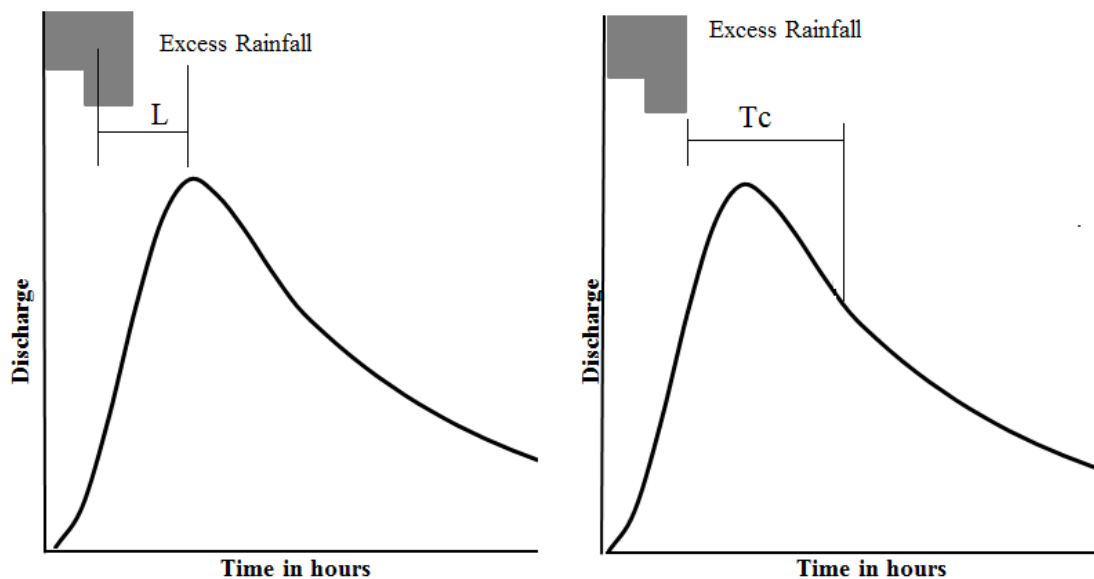


Figure 3-4: Graphical definitions of lag time and time of concentration.

Lag, as defined by NRCS, is the time from the center of mass of the rainfall excess to the peak rate of runoff as shown by Figure 3-4 (left). Similarly, the time of concentration is the time from the end of the rainfall excess to the point on the falling end of the hydrograph where the recession curve begins, as shown in Figure 3-4 (right). It is quite difficult to determine the time that the rainfall excess begins and ends. Where sufficient rainfall and runoff data are not available, the usual procedures for determining L and T_c are outlined in the following sections.

NRCS-NEH Part 630, Hydrology discussed two methods for estimating time of concentration and lag when hydrograph data are not available. These methods, the curve number method and the flow path hydraulics method, are discussed in the following sections.

3.4.3 Watershed Lag Method to Estimate Time of Concentration

One parameter that is needed for input to the WinTR-20 is the time of concentration. The designer may use Watershed Lag Equations or graphs instead of calculating the individual overland/sheet flow and shallow concentrated flow separately. The time of concentration is calculated as:

$$T_c = 1.67 L \quad (3.8)$$

where both T_c and L are in either hours or minutes.

The NRCS Watershed Lag Equation is:

$$L = \frac{L_h^{0.8} (S+1)^{0.7}}{1900 Y^{0.5}} \quad (3.9)$$

where: L is the Lag, in hours

L_h is the hydraulic length of watershed, in feet

$$S \text{ is } \frac{1000}{RCN} - 10 \quad (3.10)$$

Y is the average watershed land slope (perpendicular to flow), in Percent

The NRCS Watershed Lag Equation may not be used when the drainage area is greater than five square miles. The minimum length used in the Lag Equation shall be 800 ft. Shorter lengths will result in artificially low lag times.

There are several ways to estimate the watershed slope, Y , and they may not agree with each other. The original version of the GISHydro used the average slope categories assigned to the soil types. This is probably the weakest approach. The optimal approach is to use the 30-meter resolution digital terrain data that are available for Maryland in GISHydro. Slopes estimated with 90-meter data will not agree with the 30-meter data. Another approach is to digitize the areas between “heavy line” contours, assign average elevations to these enclosed areas and then weight them for the watershed. The “heavy line” contours are those such as 100 feet, 200 feet, etc. Finally, the lengths of the heavy line contours can be measured and the watershed slope estimated as:

$$\text{Watershed Slope} = \frac{MN}{A_{sf}} \quad (3.11)$$

where: M is the total length of heavy line contours, in feet
 N is the contour interval, in feet
 A_{sf} is the drainage area, in square feet

The hydraulic length (L_h) in feet can be estimated from a map or the following relation can be used:

$$L_h = 10,100 A_{sm}^{0.6} \quad (3.12)$$

where A_{sm} is area, in square miles.

In summary, several issues in the use of the empirical lag equation approach impact the time of concentration and, thereby, the peak discharge of the storm hydrograph. The uncertainties in the value of the curve number discussed in Section 3.3 represent one problem. Estimating the hydraulic length is another. And the value assigned to the slope depends on the estimation approach adopted.

The reader will note that the Lag equation is not included as a procedure in WinTR-55, *Hydrology for Small Watersheds*. Thus, the Panel cautions against the use of the Lag equation in urban (> 10% impervious) watersheds until additional research becomes available.

3.4.4 Estimating the Time of Concentration from Flow Path Hydraulics

The time of concentration is the cumulative flow time required for a particle of water to travel from the hydraulically most remote point first overland, then through the shallow concentrated flow channels, and finally through the main stream network to the watershed outlet. The time may increase as a consequence of flow-through natural storage such as lakes or wetlands or ponding behind culverts or other man-made structures. Estimating the time of concentration by simulating the hydraulics of each flow path component is treated in this section. Because the quantity of flow and, therefore, the hydraulics are different for each storm frequency, it is logical to expect that the time of concentration will be different for a 2-yr storm than for a 100-yr storm. Recognizing this, the Panel recommends that bankfull conditions that many consider to approximate the 2-yr storm conditions be used to estimate the time of concentration.

3.4.5 Overland Flow

At the upper reaches of a watershed, runoff does not concentrate into well-defined flow paths, such as rills, gullies, or swales. Instead it probably flows over the surface at reasonably uniform, shallow depths as sheet flow. Sheet flow is evident on long, sloping streets during rainstorms. After some distance, sheet flow begins to converge into concentrated flow paths that have depths noticeably greater than that of the shallow sheet flow. The distance from the upper end of the watershed or flow surface to the point where

significant concentrated flow begins is termed the overland flow length. For impervious surfaces the overland flow length can be several hundred feet. For pervious erodible surfaces and surfaces with vegetation, concentrated flow will begin after relatively short overland flow lengths.

In the upper reaches of a watershed, overland flow runoff during the intense part of the storm will flow as a shallow layer with a reasonably constant depth. An equation, referred to as the kinematic wave equation for the equilibrium time, can be developed using Manning's equation with the assumption that the hydraulic radius equals the product of the rainfall intensity and the travel time, i.e., $R_h = i T_t$, which is the uniform flow depth for a wide open channel [Welle and Woodward (1986)]. Using the velocity equation with the travel time (minutes) equal to the time of concentration, Manning's equation becomes:

$$V = \frac{L}{T_t(60)} = \frac{1.49}{n} R_h^{2/3} S^{1/2} = \frac{1.49}{n} \left(\frac{i T_t}{60(12)} \right)^{2/3} S^{1/2} \quad (3.13)$$

where V is velocity, ft/sec
 i is precipitation intensity, in/hr
 T_t is Travel time, min
 S is average slope, ft/ft
 L is flow length, ft

Solving Eqn. 3.13 for the travel time yields:

$$T_t = \frac{0.938}{i^{0.4}} \left(\frac{nL}{\sqrt{S}} \right)^{0.6} \quad (3.14)$$

Equation 3.14 requires the rainfall intensity i for the time of concentration. Since T_t is not initially known, it is necessary to assume a value of T_t to obtain i from a rainfall IDF curve and then compute T_t . If the initial assumption for T_t is incorrect, then a new estimate of i is obtained from the IDF curve using the computed value of T_t . The iterative process should be repeated until the value of T_t does not change. Generally, only one or two iterations are required.

To bypass the need to solve Equation 3.14 iteratively, Welle and Woodward (1986) assumed a power-model relationship between rainfall intensity and rainfall duration. Using a return period of two years, they substituted the 2-yr, 24-hour rainfall depth for the rainfall intensity i and derived the following alternative model for Equation 3.14:

$$T_t = \frac{0.42}{P_2^{0.5}} \left(\frac{nL}{S^{0.5}} \right)^{0.8} \quad (3.15)$$

where P_2 is the 2-yr 24-hr rainfall depth, in
and all other variables are as defined in Eqn. 3-13.

Equation 3.15, which is presented in USDA-NRCS- NEH Part 630 Chapter 15 (May 2010), has the important advantage that an iterative solution is not required.

In addition to the previously mentioned assumptions, these two kinematic wave equations (3.14 and 3.15) make the following assumptions: (1) constant rainfall intensity, i ; (2) no backwater effects; (3) no storage effects; (4) the discharge is only a function of depth (for example $q = ay^b$), and (5) planar, non-converging flow. These assumptions become less realistic as the slope decreases, the surface roughness increases, or the length of the flow path increases.

The overland or “sheet flow” Manning “n” values for use with Equations 3.14 and 3.15 are given in Table 3-3 and are for very shallow flow depths. These values reflect the effects of rain drop impact; drag over plane surfaces; obstacles such as litter, crop ridges, and rocks; and erosion and transportation of sediment. The 24-hour rainfall depth P_2 for Equation 3.15 can be computed as the product of 24 hr and a 24-hour intensity [in/hr] obtained from an IDF curve for the 2-yr return period.

Table 3-3: Manning’s Roughness Coefficients n for Sheet Flow

| Surface Description | n |
|---|-------|
| Concrete, Asphalt, bare smooth ground | 0.11 |
| Gravel, rough ground | 0.02 |
| Fallow (no residue) | 0.05 |
| Cultivated Soils: | |
| Residue cover \leq 20% | 0.06 |
| Residue cover $>$ 20% | 0.17 |
| No-till Cultivated (corn–mature growth) | 0.30 |
| Cultivated (corn-mature growth) | 0.50 |
| Cultivated – fallow (no residue) | 0.60 |
| Soybeans (full growth) | 0.15 |
| Grass: | |
| Short and sparse | 0.24 |
| Dense turf (residential lots & lawns) | 0.41 |
| Very dense, tall, rough surface, uncut | 0.20 |
| Short Pasture grasses | 0.073 |
| Woods: | |
| Light undergrowth | 0.40 |
| Dense undergrowth | 0.80 |

(The values in Table 3-3 are a composite of information compiled by Engman, 1986)

3.4.6 Shallow Concentrated Flow

The shallow concentrated flow segment of the time of concentration is generally derived using Figure 15-4 of the NEH Part 630 chapter 15 or similar graphs. The flow velocities of Figure 15-4 are computed using the Manning's equation; and the information in Table 15-3 of NEH 630 Chapter 15. The selected values of the Manning n are those normally expected for channel flow.

Use of the NEH Part 630 Chapter 15 graph (and the values of n and R listed above) may underestimate the travel time by overestimating the flow velocity for upper reaches of the shallow concentrated flow path. In shallow depths the hydraulic radius approaches the depth of flow. In this shallow flow range the n value should represent a higher resistance than that which would be used for channel flow. For example, a wide grass swale with flow depths of less than 0.5 feet and grass 6-inches high or more, the n value may fall between the 0.24 value for sheet flow and the 0.05 value for channel flow. In this case the designer might select an n value of 0.10, which better represents this shallow concentrated flow.

For more insight on the behavior of the Manning n in grassed channels, the reader should examine pages 179-188 in Chow (1959), which discuss the extensive experimental work of W.O. Ree (1949). Ree's experiments showed that Manning roughness coefficients varied with the type, density and height of grass and the product of the velocity and hydraulic radius. Shallow depths with low velocities produced roughness coefficients as high as 0.5.

3.4.7 Open Channel Flow

Estimating the travel time through the main stream requires the user to model the length, slope, roughness and typical bankfull cross section. While a good map is assumed to provide a reasonable estimate of the length and slope of the stream, it is very difficult to select the Manning roughness coefficient and the "typical" cross section. Even if one uses stream gaging to determine a roughness coefficient at a point, the coefficient is likely to be different at another discharge or at another point along the stream. The cross section varies significantly along the stream, so it is difficult to determine which is the "typical" section. Errors in the cross sections can lead to incorrect estimates of the time of concentration and storage conditions and, therefore, lead to peak predictions that are too high or too low.

3.4.8 Length and Slope of Streams

The Panel recommends that the USGS 1:24,000 quadrangle sheets or more detailed maps, if available, be the standard for determining the length and slope of streams used to estimate part of the time of concentration. It is recognized that the 1:24,000 scale cannot adequately represent the meanders of many streams. Thus, the estimated length may be too short and the slope too steep. When field investigations indicate that this may be a

problem, the user should seek a larger scale map or support changes through additional field investigations or aerial photography.

3.4.9 Open Channel Manning Roughness Coefficient

There are two major uses of Manning roughness coefficient in WinTR-20. One is estimating the Manning n for the channel flow segment for the calculation of travel time and time of concentration. The other is estimating the Manning n for representative cross sections used for routing reaches.

The channel flow segment for the calculation of travel time and time of concentration is concerned primarily with the Manning n for the bankfull cross section, whereas the Manning n for the representative cross section for a routing reach applies to the complete cross section including channel and flood plain. Estimating Manning n for representative cross sections for reach routing is discussed in Section 3.5.3.

The Manning roughness coefficient is a very difficult parameter to estimate and can cause significant changes in the estimates of peak discharge. Even if estimates are based on carefully measured field data, the n would probably change if the measurements are made at a different discharge or at another cross section.

A study conducted by the US Army Corps of Engineers Hydrologic Engineering Center (USACE-HEC, 1986) explored the question of uncertainty in roughness coefficient estimates by asking their staff and training course participants to estimate roughness coefficients for several natural streams given photographs and descriptions of the streams. This effort found that the estimates by the participants were approximately log normally distributed with a standard deviation given by the equation

$$SD = n \left[e^{(0.582+0.10 \ln n)^2} - 1 \right]^{0.5} \quad (3.16)$$

where n is the average estimate

e is a mathematical constant (Euler's constant), equal to 2.718...

The equation indicates that an average estimate of $n = 0.04$ has a standard deviation of 0.011. Thus, if the average estimate of a group of experienced designers is $n = 0.04$, we can anticipate that their estimates will scatter, with approximately 68% of their predictions being between $n = 0.029$ and $n = 0.051$.

A number of tables list Manning n values for different types of man-made and natural channels. The table presented by Chow (1959) in his Chapter 5 is an excellent source. Chow points out that these values should be adjusted to reflect local conditions such as channel irregularity, alignment, silting and scouring, obstructions, meandering, suspended material and bed load. These and other corrections are discussed in considerable detail in Chow's Chapter 5. Supplement B of NRCS National Engineering Handbook Section 5 "Hydraulics" (1956) provides a manual procedure to estimate

Manning's n value for stream cross section. Other references include Arcement and Schneider (1984), Fasken (1963) and Barnes (1967).

Still another problem arises when field investigations indicate that the roughness varies significantly from one section of the stream to another. In these instances it may be necessary to break the stream into segments and compute the flow time for each. In the absence of field investigations, an initial Manning n value of 0.05 should be used for the bankfull cross sections for estimating the time of concentration.

3.4.10 Bankfull Cross Section

Another factor contributing to changes in the peak flow prediction is the "typical" bankfull cross section selected to determine the velocity and, therefore, one part of the time of concentration. For example, selection of a cross section near the outlet of the watershed may result in a channel velocity that is significantly different from that predicted by the use of a cross section chosen from a point about half-way up the stream. Increasing the hydraulic radius will result in a higher velocity and corresponding shorten the time of concentration. Because the cross section varies from point to point along the channel, it is quite difficult to decide which is the representative cross section. Thus, the user must recognize the importance of the representative cross section when calibrating against the Regional Regression Equations based methods of Chapter 2.

If it is not practical to survey bankfull cross sections, an alternative is to use regional regression equations that relate the bankfull depth, width and cross sectional area to the area of the upstream drainage basin. Figure 3.5 shows an example of channel cross-section regional regression equations developed for SHA by McCandless, Tamara and Everett (2002), McCandless and Tamara (2003) and McCandless and Tamara (2003). Appendix 4 presents the equations that are accepted by Maryland's SHA and WMA. Dunne and Leopold (1978) present a similar set of relations and Rosgen (1996) includes several examples of findings similar to Figure 3-5.

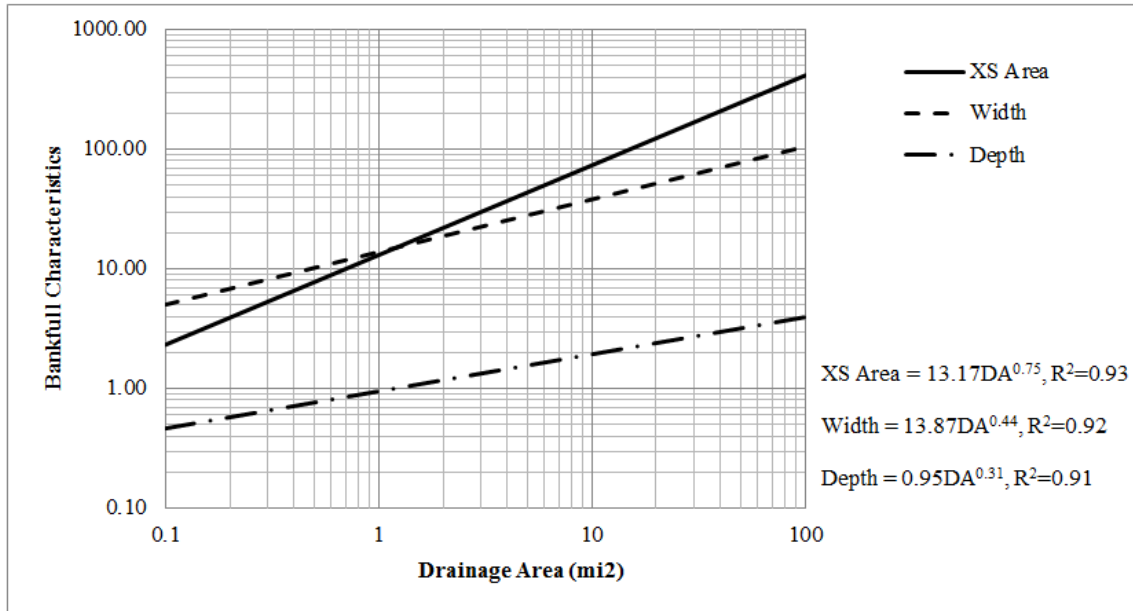


Figure 3-5: Bankfull Characteristics for Selected USGS Sites in the Maryland Piedmont

Figure 3-6 and Figure 3-7 indicate that time of concentration differences associated with cross-sections defined through the use of regional regression equations, as opposed to surveyed cross sections, may be less than the differences associated with different roughness coefficients. In Figure 3-6, the Siebach (1987) S-curve (time-area curve) defining time of concentration used travel times computed with surveyed, bankfull cross sections. The Dunne and Leopold curve used cross sections that were defined with their regional regression equations that estimated bankfull width, area and depth as a function of the watershed area. The S-curves used to estimate the time for concentration in Figure 3-7 used surveyed cross sections with the Manning roughness coefficient being varied.

The two figures indicate that errors in the Manning roughness coefficient can cause larger errors in the time of concentration than the changes associated with differences between surveyed and regression defined bankfull cross sections. This is to be expected because the channel velocity varies linearly with the roughness coefficient and with the 0.667 power of the hydraulic radius.

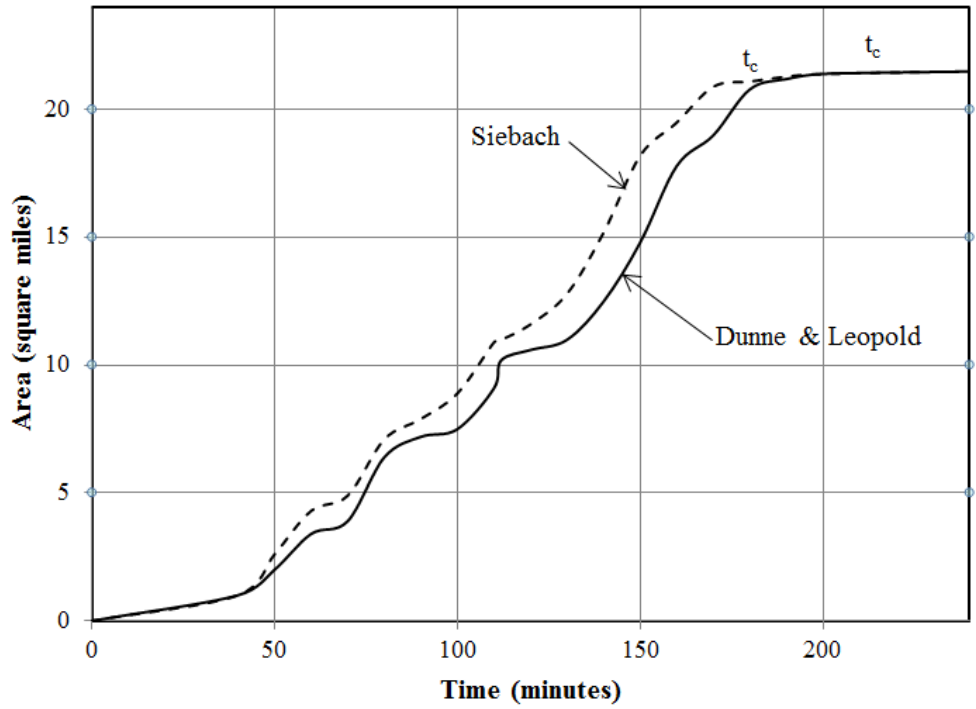


Figure 3-6: Time-Area Curves Using Surveyed and Regression Equation Defined In-Bank Cross Sections ($n= 0.04$)

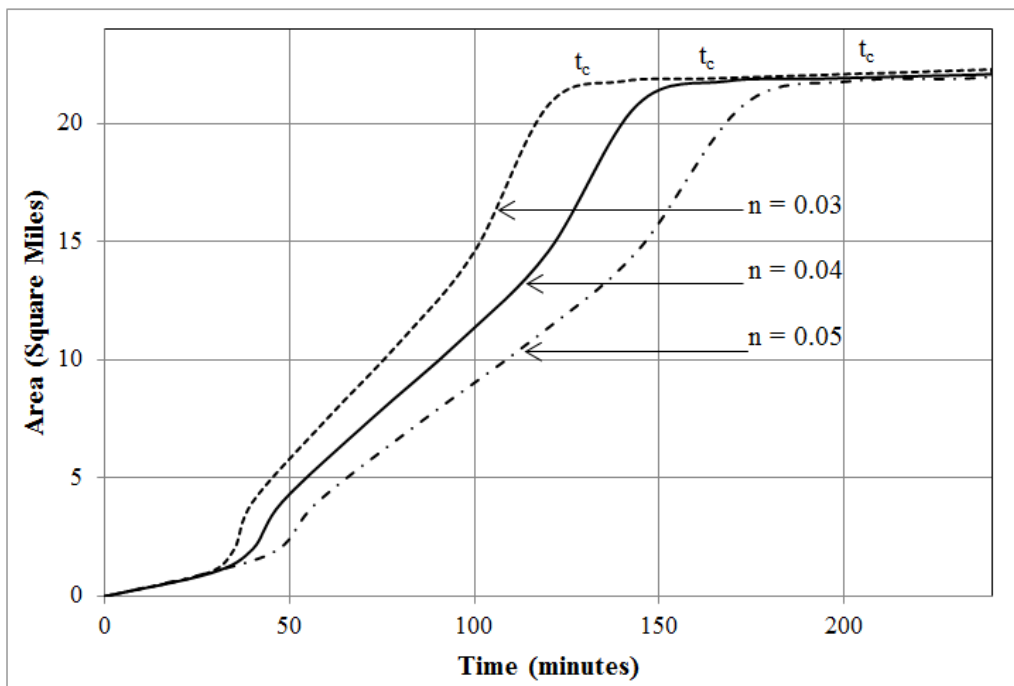


Figure 3-7: Time-Area Curves Using Surveyed In-Bank Cross Sections and Indicated Manning Roughness Coefficients

As can be seen from the above discussion, accurate estimates of the time of concentration are difficult to obtain because of the large uncertainty in the parameters used to compute the time of concentration. Thus, there needs to be an alternative approach that can serve to define upper and lower bounds for time of concentration. Regression models that estimate time of concentration based on watershed characteristics provide an attractive approach. Limited tests with a model developed by W.O. Thomas, Jr. and described in Appendix 6 have been very encouraging. The Panel recommends that designers be encouraged to apply the Thomas model in their studies to check realistic bounds for the time of concentration. The Panel also recommends that a regional regression research project described in Chapter 5 be given one of the highest priorities.

3.5 SUBDIVIDING INTO SUB-WATERSHEDS AND ROUTING

If the watershed is large or has tributary drainage areas that have land/soil complexes that differ from each other, the watershed may be divided into sub-watersheds. In this approach, the dimensionless UHG uses the area, curve number and time of concentration for each sub-watershed to develop storm hydrographs. These hydrographs for each subwatershed are then routed through the stream network to the outlet of the overall watershed. Even if the watershed is not especially large or heterogeneous, calibrating to the USGS methods may require subdivision in order to model the attenuation provided by the flood plain.

No “magic number” exists to define a small versus a large watershed. A watershed might be considered small if the land phase processes — overland and shallow confined flow — dominate the peak discharge and the shape of the runoff hydrograph. A watershed might be large if the translation and storage provided by the stream network provides significant attenuation or modification to the storm hydrograph. A large watershed by this definition could require subdividing and flood routing.

3.5.1 How Many Sub-watersheds

Part of the decision controlling the subdivision of the watershed is tied to the heterogeneous nature of the watershed. A watershed should be subdivided if peak discharges or hydrographs are needed at points within the watershed in addition to the peak or hydrograph at the watershed outlet. In the past NRCS has used the criteria if the drainage exceeds 20 square miles, subdivision should be considered.

There does not appear to be a “rule” that one can apply to confirm that there is an optimal number of subdivisions for a watershed of a given size or set of topographic characteristics. Designers must calibrate against the Regional Regression Equations to ensure that their subdividing approach is appropriate. The Panel recommends the paper by Casey et al. (2015) for further guidance on subdivision in WinTR-20.

3.5.2 The Representative Routing Cross Section

Bankfull and over-bank cross sections often show tremendous variations along a stream reach. Selecting the representative cross section for use in developing the required stage-area-discharge relation for the routing reach is a very difficult task. If the flood plain is too narrow, the peak will be too high and if it is too wide, the peak will be subject to too much attenuation.

An alternative to the use of field surveys to define typical cross sections is to digitize along transects drawn on maps, perpendicular to the stream. In many areas, 1:2,400 (1" = 200') or similar scale maps are available. Transects on these maps can provide an excellent base for routing sections. The bankfull portion of the section is generated by the regression equations discussed in Section 3.4.8. As shown by Figure 3-8, even a 1:24,000 scale map can be used in areas where there is good topographic definition.

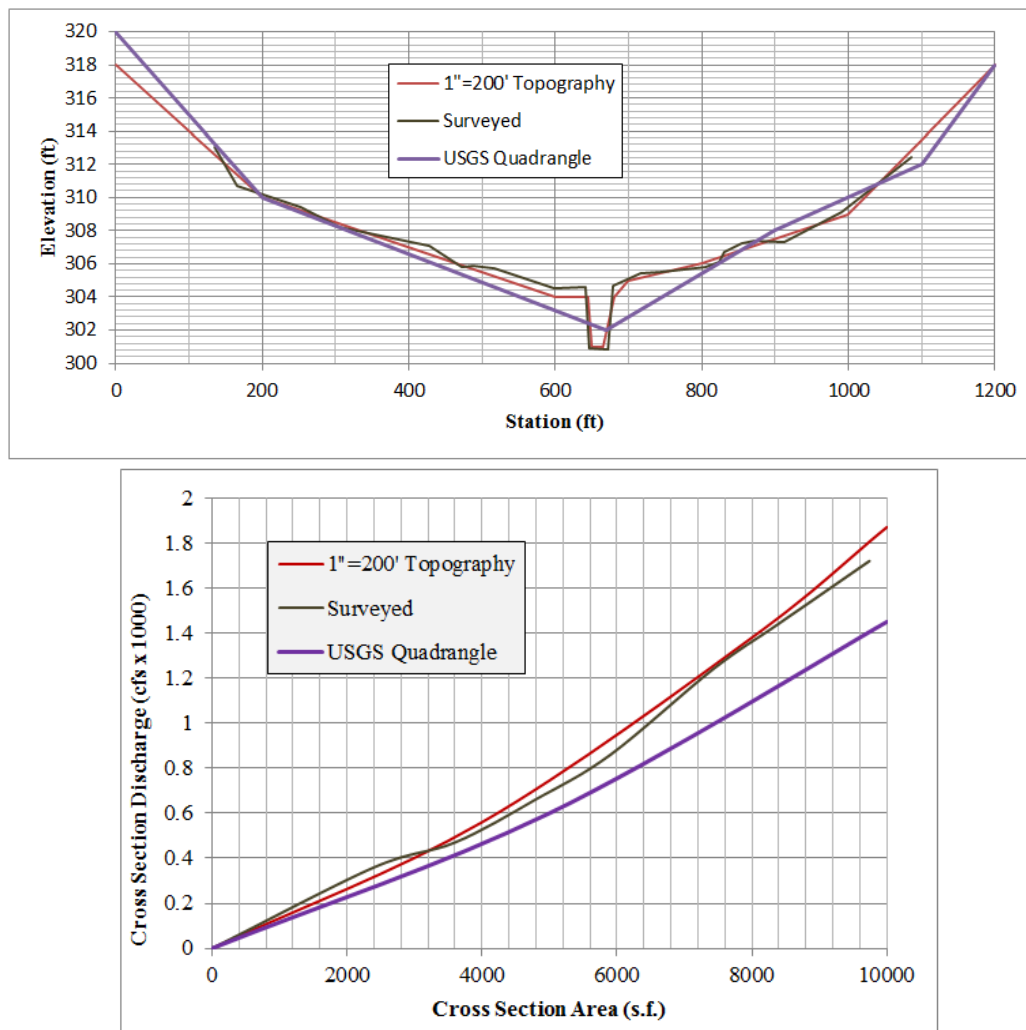


Figure 3-8: Discharge-Area Curves for Surveyed and Contour Defined Synthetic Cross Sections

Assume that we are confident that the “correct” representative cross sections for the flood routing component of the WinTR-20 have been chosen. We are now faced with the problem of selecting the Manning n required for the stage-area-discharge relationship. Section 3.4.9 discussed the difficulties associated with the definition of the in-bank roughness and illustrated the impact of the roughness on the time of concentration.

3.5.3 Manning n for the Representative Routing Cross Section

Estimating the over-bank roughness involves more uncertainty than the bankfull coefficient because of the extremely limited amount of data collected for flow in a flood plain. Chow’s (1959) table suggests flood plain Manning n that range from 0.02 to 0.20.

For the representative cross section for reach routing, different Manning n values are estimated for the channel and overbank areas to the left and right of the channel. Arcement and Schneider (1984) include photographs of flood plains with Manning n estimates from 0.10 to 0.20.

3.5.4 Channel Routing Techniques

The WinTR-20 routing module is the Muskingum-Cunge (M-C) approach. The M-C method is a variation of the Muskingum method that has been used for many years in river forecast operations by the National Weather Service, U.S. Army Corps of Engineers and similar organizations. Both the M-C and Muskingum methods use a series of routing coefficients that are defined by the routing period, Δt , a travel time constant for the routing reach, K , and a weighting factor, X . In the traditional river forecast environment, there are usually recorded inflow and outflow hydrographs that can be used to define K and X and earlier experiences on the river can evolve the optimal value of Δt . Concise summaries of the two routing methods can be found in Bedient and Huber (1992).

In most cases there will be no records of inflow and outflow hydrographs at the point of interest that can be used to determine K and X . Without historic records of inflow and outflow hydrographs, K is estimated by the length of the routing reach and the celerity of a small gravity wave moving through the reach. The length of the routing reach is a decision made by the user. The celerity of the small gravity wave requires an estimate of the average velocity, width and depth of flow through the routing reach. The major difference between the Muskingum and M-C procedures is that the M-C procedure includes an equation to estimate X from cross section hydraulic properties and reach length. The value of X is defined from the routing reach length, average width, average slope, celerity of a gravity wave, and the peak discharge entering the reach. The second major difference between the Muskingum and M-C is that with the M-C there is a possibility of breaking the reach into a number of routing steps.

The M-C method was selected by NRCS because it was concluded that it would overcome some of the problems associated with the former Modified Att-Kin module in TR-20. Merkel (2002) outlines the studies that NRCS made before selecting the M-C

procedure. The M-C procedure was compared to the dynamic wave routing for a large number of cross section shapes, reach lengths, and slopes. Note that all the parameters in the previous paragraph have feedbacks involving many of the same issues that impact the performance of the current Modified Att-Kin method. For example, to get the coefficients K and X, the user must have decided on the length of the routing reach and must still make judgment decisions on the Manning n and “average cross section” so that the celerity can be computed. The values for each of these elements are difficult to determine.

3.6 THE DESIGN STORM

The WinTR-20 requires that the user define the total depth of rainfall, the duration of the storm, and time distribution of cumulative rainfall depth within the storm. Before NOAA Atlas 14 was published, the usual approach was to accept one of the “standard” design storms such as the NRCS Type II, 24-hour storm.

A major assumption used in the development of the design storm is that the 5-minute through 24-hour rainfall values have the same return period. In other words, the 5-minute 100-year rainfall, 10-minute 100-year rainfall, etc., up to the 24-hour 100-year rainfall occur within the same storm. A second assumption is that the durations “nest” with the most intense rainfall at the storm center (12 hours) and the intensity gradually reducing symmetrically from the storm center to the starting and ending times (zero and 24 hours), (Merkel, et.al., 2006). Details on the procedure and an example based on Howard County, Maryland are included in Appendix 7. This procedure has been incorporated into WinTR-20 so the user does not need to do significant amounts of hand or spreadsheet calculations.

The watershed area and time of concentration are used to convert the dimensionless UHG to a UHG. Then the cumulative rainfall distribution and runoff curve number are used to generate a series of cumulative runoff values. The cumulative runoff values for the design storm are then convolved with the UHG to produce a storm hydrograph. If the 100-yr, 24-hour depth of rainfall is used to define the intensities in the design storm distribution, the “design expedient” typically accepts the peak discharge generated by the WinTR-20 as an estimate of the 100-year frequency peak discharge to be used in design. **It must be emphasized that the WinTR-20 computes an estimate of the peak discharge caused by a synthetic 100-yr storm that is based on rainfall records and not an estimate of the peak discharge based on stream flow records. The two discharges may differ significantly. The Panel’s recommended calibration against one of the methods described in Chapter 2 of this report is intended to reconcile some of the disagreement.**

Decisions that define the storm input are very important because the performance of WinTR-20 is very sensitive to the structure of the rainfall input.

Segments of the NRCS 24-hour design storm should be used to develop synthetic storms having different durations. When developing a synthetic storm having a duration shorter than 24 hours, one should use the period that is distributed equally on each side of the steepest portion of the mass curve. For example, a six-hour storm would be based on the dimensionless intensities between $T = 9.0$ and $T = 15.0$ hours on the NRCS 24-hour storm distribution. A 12-hour storm would be based on the dimensionless intensities between $T = 6.0$ and $T = 18.0$ hours on the NRCS 24-hour storm distribution. Figure 3.10 illustrates the NRCS 24-hour storm used to generate the storm distributions having durations of 6 and 12 hours for a location in Howard County, Maryland (longitude -76.9862, latitude 39.2922). An example of development of a 6-hour and 12-hour storm distribution based on a location in Howard County, Maryland is included in Appendix 7.

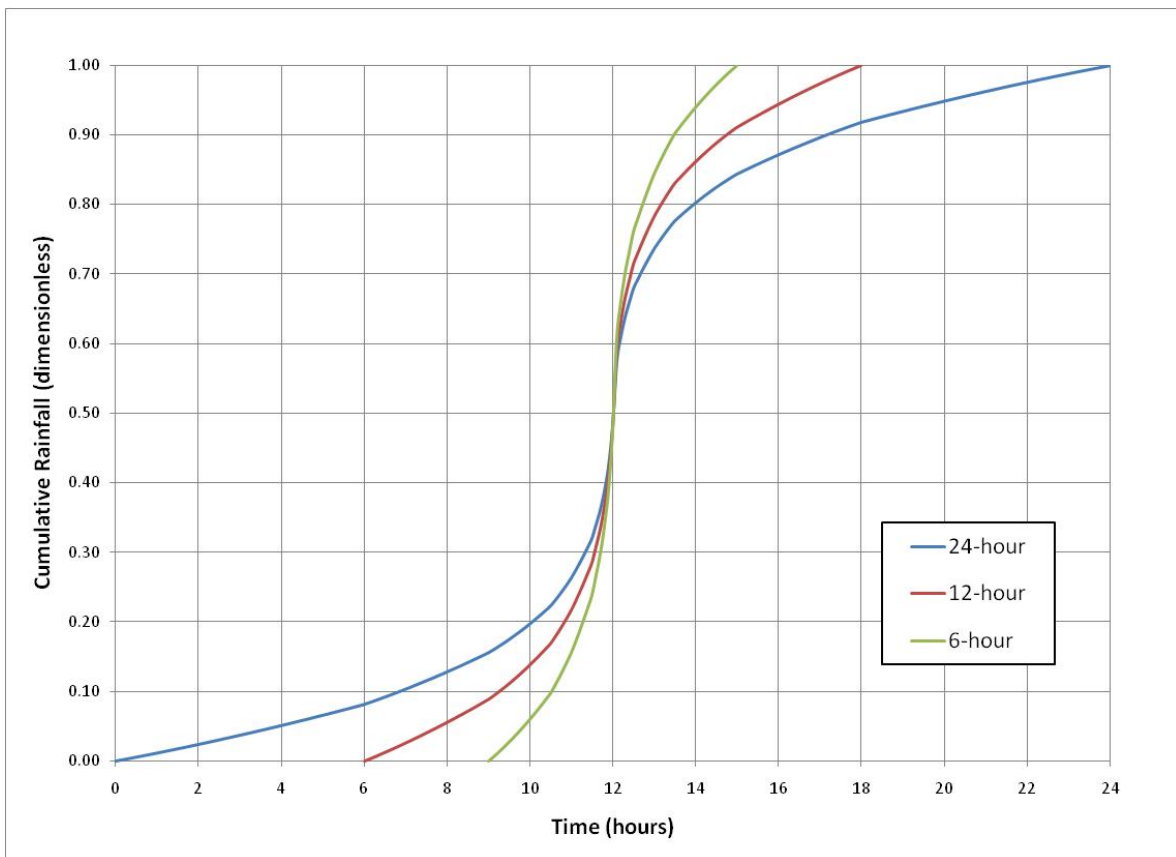


Figure 3-9: 6, 12, and 24 Hour Storm Distributions, Howard County MD

Design storms having similar structures, but different durations, produce significantly different hydrographs and peak discharges when input to WinTR-20. As a consequence, there is uncertainty as to what storm duration should be used. The traditional practice in Maryland in the past has been to use the 24-hour Type II storm in all cases. However, the Type II storm distribution does not fit the data from NOAA Atlas 14 for the entire state of Maryland nor does it fit the NOAA Atlas 14 data for the 1-year to 500-year return periods. If ratios of shorter-duration to 24-hour rainfall are computed at a point, there can be significant differences when compared to the ratios within the Type II storm

distribution. For example, at a point in Howard County (longitude -76.9862, latitude 39.2922) rainfall ratios are included in Table 3.5. The rainfall data used to develop this table are based on the partial duration series.

Table 3-4: Rainfall ratios based on NOAA 14 and Type II for a point in Howard County

| Duration | Type II Ratio | 1-year NOAA ratio | 10-year NOAA ratio | 100-year NOAA ratio |
|----------|---------------|-------------------|--------------------|---------------------|
| 5 min | 0.114 | 0.129 | 0.110 | 0.085 |
| 10 min | 0.201 | 0.208 | 0.177 | 0.135 |
| 15 min | 0.270 | 0.261 | 0.224 | 0.170 |
| 30 min | 0.380 | 0.356 | 0.324 | 0.261 |
| 60 min | 0.454 | 0.443 | 0.422 | 0.359 |
| 2 hour | 0.538 | 0.530 | 0.511 | 0.456 |
| 3 hour | 0.595 | 0.568 | 0.548 | 0.496 |
| 6 hour | 0.707 | 0.708 | 0.682 | 0.636 |
| 12 hour | 0.841 | 0.867 | 0.849 | 0.826 |
| 24 hour | 1.000 | 1.000 | 1.000 | 1.000 |

Table 3-4 shows that the 100-year rainfall intensity is much less for the distribution based on NOAA 14 data compared to the Type II. The rainfall intensity for the 1-year storm is relatively close to the intensity of the Type II.

Table 3-5: Comparison of peak discharges between NOAA 14 and Type II storm distributions.

| Time of Conc. [hr] | Peak Discharge [cfs] | | | | | |
|--------------------|----------------------|---------|---------|---------|----------|---------|
| | 1-year | | 10-year | | 100-year | |
| | NOAA 14 | Type II | NOAA 14 | Type II | NOAA 14 | Type II |
| 0.75 | 825 | 845 | 2715 | 3065 | 5166 | 7151 |
| 1.25 | 585 | 582 | 1984 | 2123 | 3933 | 4970 |
| 2.0 | 420 | 408 | 1450 | 1487 | 2968 | 3488 |
| 3.0 | 314 | 300 | 1090 | 1083 | 2299 | 2549 |

Table 3-5 was developed at the same location in Howard County, Maryland. It is based on a drainage area of 3.0 square miles and curve number 75. Short to long times of concentration were used to show the sensitivity of storm distribution to changes in time of concentration. As expected, the 1-year peak discharges are not significantly different between the two storm distributions. However, the NOAA 14 distribution produces 100-year discharges significantly lower. These results may not be generalized for the entire state of Maryland because a storm distribution based on NOAA 14 data depends on the relationship of 5-minute through 24-hour rainfall data at each location and return period.

Experiments conducted by the Panel demonstrate that the 25-, 50-, and 100-yr flood peaks predicted by WinTR-20, using the 24-hour design storm duration and appropriate estimates of watershed parameters, agree reasonably well with the flood peaks predicted by the USGS – based equations. However, such is not the case for more frequent storm events. The Panel’s experiments indicate that the 2-, 5-, and 10-yr flood peaks generated by WinTR-20 using the 24-hour design storm duration are often significantly higher than those predicted by the USGS - based equations. When shorter duration design storms, based upon center-peaking period of the NRCS Type II storm and meeting all of the conditions imposed by the Maryland IDF curve, are used for the 2-, 5-, and 10- year flood peaks, the WinTR-20 and USGS estimates may be brought into close agreement. Obviously, more research using NOAA Atlas 14 data is warranted. In the interim, the 10-, 5-, and 2-yr storm events should be derived using either the 6-hour or 12-hour design storm duration if needed during the calibration process.

The depths of precipitation (partial duration) of a given frequency and duration vary considerably across Maryland. The depth of precipitation in a 100-yr 24-hour storm varies from 5.4 inches in western Garrett County to 9.3 inches in Calvert, St Mary’s, Wicomico, and Worcester counties.

There appears to be a problem in applying WinTR-20 models in western Maryland. Peak flood flows predicted by WinTR-20 are often significantly higher than the estimates provided the USGS based regression equations. Many of the USGS stream gages have operated in that region for more than 70 years. These gages simply have not measured peak flows as high as those measured in the central portion of the State. Analysis of eleven USGS gages in the Maryland Appalachian Plateau and Valley and Ridge provinces demonstrates that the observed maximum flows range between 83 and 300 cfs per square mile, with an average of 167 cfs per square mile. The minimum length of record is 17 years and the maximum length is 50 years. The average watershed area is 23 square miles. The same analysis conducted on six gages in the Maryland Piedmont indicates that the maximum flows vary from 319 to 780 cfs per square mile, with an average of 452 cfs per square mile. The minimum length of record is 12 years and the maximum length is 60 years. The average watershed area is 22.3 square miles. Based upon watershed characteristics alone, one would expect the steep mountain areas in western Maryland would yield higher peak flows than the Piedmont. However, indications are that flood producing rainfalls in western Maryland may be shorter in duration than those farther east. More specific research using NOAA 14 data is warranted in this regard. Therefore, if the flood estimates using the 24-hour storm do not lie between the regression estimate and the upper 68% limit, the analyst should use the 12-hour storm for the 25-, 50- and 100-yr events and the 6-hour storm for the 2-, 5- and 10-yr events.

Partial duration precipitation values from NOAA Atlas 14 are recommended for design purposes. Precipitation values available from NOAA Atlas 14 are point estimates. The typical storm is spatially distributed with a center area having a maximum rainfall and a

gradual reduction of intensity and depth away from the storm center. The spatial distribution of rainfall within a storm generally produces an average depth over an area that is a function of watershed area and storm duration. Figure 3.11 is based on the areal reduction curves from USWB-TP-40. The Panel recommends that the hydrologist adjust the design storm rainfall to reflect spatial distribution.

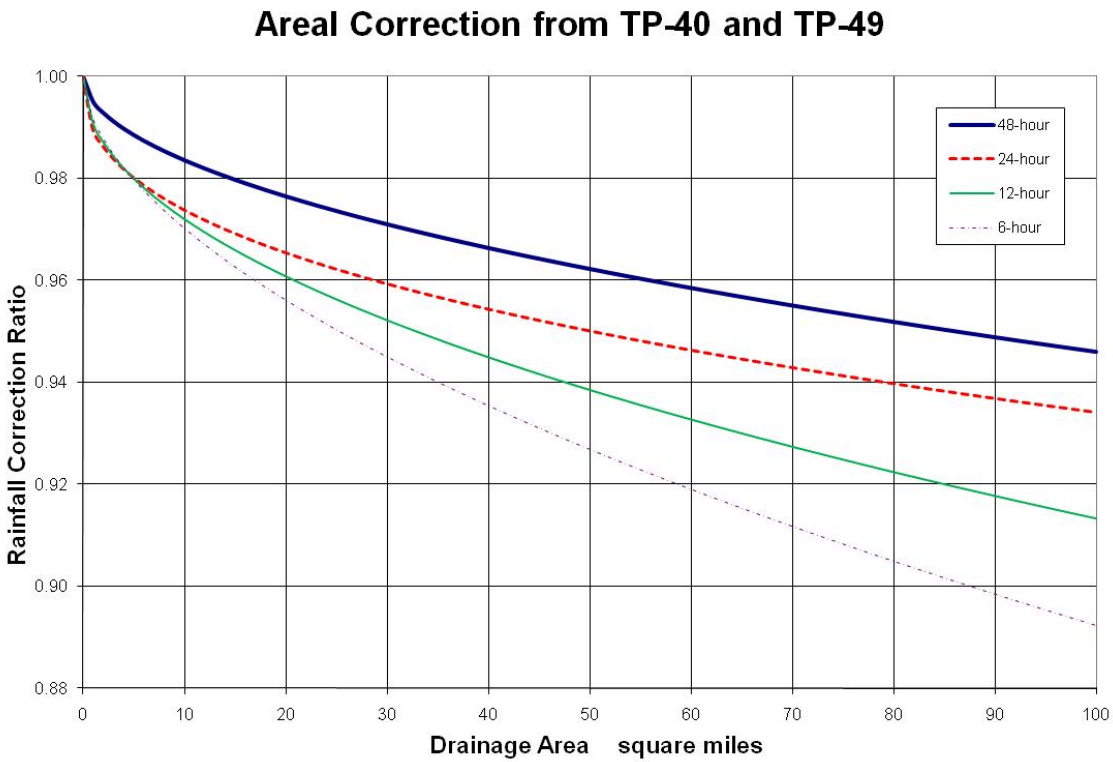


Figure 3-10: Areal Reduction curves based on TP-40

If the hydrologist is using GISHydro the adjustment is an option presented as a screen prompt and should be implemented for all watershed studies. If the hydrologist is conducting a study outside the GISHydro environment, the adjustment for spatial distribution should be made using Eqns 3.17 – 3.20.

$$RF = 1 - \alpha A_{sm}^{\beta} \quad (6 \text{ hour}) \quad (3.17)$$

$$RF = 1 - \left(\frac{\alpha}{2}\right) A_{sm}^{\beta} - \left(\frac{\varphi}{2}\right) A_{sm}^{\rho} \quad (12 \text{ hour}) \quad (3.18)$$

$$RF = 1 - \varphi A_{sm}^{\rho} \quad (24 \text{ hour}) \quad (3.19)$$

$$RF = 1 - \gamma A_{sm}^{\kappa} \quad (48 \text{ hour}) \quad (3.20)$$

where

RF is reduction factor

A_{sm} is area in square miles

$\alpha = 0.008245$

$\beta = 0.558$

$\phi = 0.01044$

$\rho = 0.4$

$\gamma = 0.005,$

$\kappa = 0.5169.$

Blank page inserted to preserve left-right pagination format.

CHAPTER FOUR

4 Calibration of WinTR-20 with Statistical Methods

4.1 OVERVIEW

The hydrologic analysis of SHA bridges and culverts must examine the behavior of the structure and local stream conditions under both existing and ultimate development watershed conditions. Because two land cover and flow path conditions are involved, the basis for these hydrologic analyses must be a deterministic model that can simulate the major runoff processes for both existing and future conditions. The recommended approach is to first select field and map defined parameters that describe the runoff processes for existing watershed conditions. After the designer is satisfied that the model provides a realistic representation of the existing watershed conditions, the impact of ultimate conditions can be simulated by adjusting the input parameters to reflect future land cover and flow path modifications.

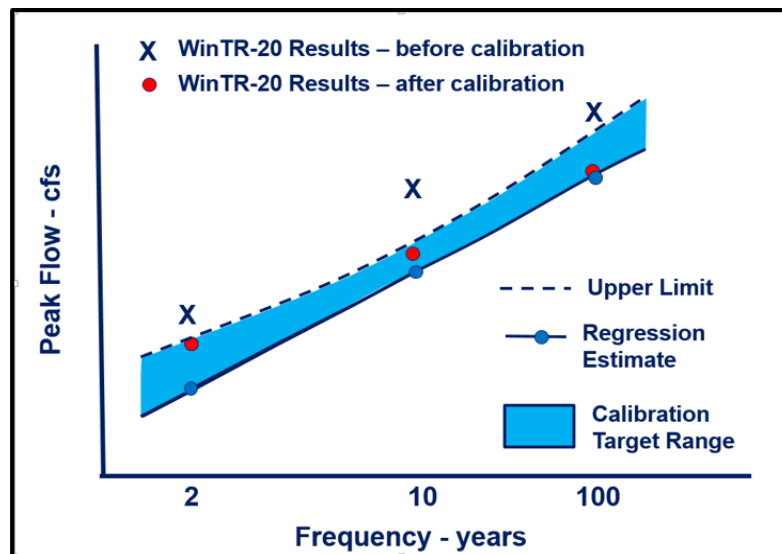


Figure 4-1: Over-prediction behavior of WinTR-20 for all return periods.

The NRCS-WinTR-20 computer program is a well established deterministic model that has an extensive history of use in Maryland. However, the WinTR-20, as with all deterministic models, is sensitive to the values of the input parameters. In most instances, the input parameters are difficult to determine. As discussed earlier, the WinTR-20 model has a tendency to over predict peak flows at all return periods. This behavior is illustrated by Figure 4-1. The Panel has concluded that this tendency to over predict can be overcome through calibration. Thus, in order to provide the designer with confidence that

the input parameters selected are representative of the existing watershed conditions, the Panel recommends that the WinTR-20 peak discharges for existing watershed conditions be calibrated against one of the methods described in Chapter 2. The WinTR-20 will be accepted as calibrated if the peak discharges for the design frequency event are in the window between the statistical best estimate and an upper limit of plus one error of prediction as defined in Chapter 2. If the watershed conditions are such that a calibration cannot be achieved in accordance with the procedures defined below, the designer will explain why the calibration cannot be accomplished and what approach will be followed to generate the required flows.

In many cases, the designer will not be able to choose one calibration adjustment for the WinTR-20 to bring the peak flow rates within the regression equation target range for all storm frequencies. For example, a calibration adjustments needed to bring the 100-year storm within the target range may not be sufficient to bring the 50, 10, or 2-year storms within their respective target ranges. In these cases, it will be necessary to use a progression of calibration adjustments in a logical sequence

Table 4.1 suggests a logical progression of calibration steps for multiple storm frequencies. It can be used as a guide for the designer with the understanding that there may be other logical calibration progressions that are more suitable for a particular watershed.

The Panel emphasizes that all input parameters to WinTR-20 must be consistent with accepted hydrologic practice. Thus, all WinTR-20 computations will be supported by documentation that lists the values of (1) category curve numbers; (2) the quantities used to define the time of concentration, and (3) the watershed segmentation and stage-area-discharge relations if routing is involved. This documentation will explain the decision making process behind the selection of each input quantity.

The following sections examine the types of errors that may occur in the definition of inputs to the WinTR-20 and the procedures to follow in making adjustments to achieve calibration. Because so few watersheds of concern to the SHA are located at a USGS gage or at a point that will allow gage transposition, the emphasis of this chapter is on calibration against Maryland Regional Regression Equations. Figure 4-1 illustrates the situation that often occurs where the WinTR-20 model estimates are higher than the USGS regression estimates. The WinTR-20 estimates in Figure 4.1 are actually greater than the regional regression estimates plus one standard error of prediction. The objective of the calibration of the WinTR-20 model is to modify the model input parameters to produce estimates of the flood discharges that are between the regression line and the upper limit represented by plus one standard error of prediction. This chapter provides guidance on modifying the model input parameters.

Table 4-1: Logical Progression of Calibration for Multiple Storm Frequency Models

| Calibration Variable/ Input Element | Application |
|--|--|
| T _c (Time-of-Concentration variables) | Same for all storms |
| RCN conditions (good-fair-poor) | Same for all storms |
| Reach Length | Actual channel and flood plain lengths may be greater than values measured from maps. |
| Dimensionless Unit Hydrograph | Same for all storms |
| Rainfall Table – 24-hr duration | Use for 25-year to 500-year storms |
| Rainfall Table – 12-hr duration | May use for the 2 through 10-year storms if the time-of-concentration is between 6 and 18 hours. |
| Rainfall Table – 6-hr duration | May use for 2, 5 and 10-year storms if time-of-concentration is less than 6 hours |
| ARC (Antecedent Runoff Condition) | Use 2 for 25-year and greater return period storms. May use <2 for the 2-year to 10-year storms provided that it does not decrease for greater return period storms. ARC of >2 may be considered for storms of 200+-years providing that it does not decrease with greater return period storms. |

4.2 SIZE AND CHARACTERISTICS OF THE WATERSHED

For watersheds greater than about 300 square miles in size, WinTR-20 models are not recommended. The NRCS developed the dimensionless UHG from data collected on relatively small watersheds. On most large watersheds, significant peak flow attenuation caused by the channel network may not be incorporated into the NRCS dimensionless UHG. Also, the assumption of homogeneous rainfall over the watershed becomes less likely for very large areas. Thus, the validity of WinTR-20 applications on large watersheds is questionable. Moreover, the effects of ultimate land use conditions on peak flows generally are muted on very large watersheds.

Before any calibration of the WinTR-20 is attempted, care should be exercised to ensure that the characteristics of the watershed are within the limits of the statistical data set used to develop the regression equations. Calibration will not be valid if there are other factors that are not accounted for in the Fixed Region Regression Equations such as ponds, wetlands storage, or structures that significantly change the natural flow characteristics of the watershed. For some regions, the regression equations are not valid

if existing impervious area exceeds 10%. This is because these regions contain insufficient gage data for urban ($\geq 10\%$ impervious) watersheds

4.3 UNDERSTANDING ERRORS

The construction of any deterministic model involves the selection of certain input values. The selection estimate or measurement of any value includes the possibility of several types of errors. These can be labeled: Random (sometimes more and sometimes less), Systematic (always more or always less), and Cumulative (small systematic errors that add up to large systematic errors). Each variable entered in the WinTR-20 model can have one or more of these errors. As with the regional equations, the selected value for any WinTR-20 input variable represents the “best educated guess.” Unfortunately, unlike the standard error of the regional equation, the standard errors of WinTR-20 input variables are unknown. However, with experience and the guidelines of standard practice, designers can estimate the range of reasonable WinTR-20 input values and confine their choices to those within this range. For example, a Manning’s roughness coefficient for a natural stream channel might be 0.05. Estimates that are 0.07 and 0.03 still appear to be within a reasonable range while 0.3 and 0.002 are not. In general, the designer should select the variables with large potential systematic errors as the most likely values to calibrate or adjust.

The WinTR-20 input variables and a description of the types of errors that are inherent in their estimate follows, along with recommendations regarding adjustments for calibration to more closely simulate the results of the Fixed Region Regression Equations. Table 4.2 is a summary of these variables and their inherent errors. It also shows the limits of calibration adjustments of the input variables. They are guidelines only and not intended as absolute limits.

4.3.1 Drainage Area

Assuming that both the map used to delineate the drainage area and the measuring device are accurate, the estimation of the drainage area includes a random error. When digitizing areas, the designer should check for random errors by ensuring that the sum of all sub-areas equals the digitized total area. Adjusting the size of a drainage area is seldom justified unless the watershed includes Karst topography or non-contributing drainage areas. In some unusual cases such as for extractive land use (mining), depression areas will not contribute to watershed runoff at the 2-year event but may contribute at the 50- or 100-year event.

4.3.2 Runoff Curve Number

The error in selection of an RCN value is random. The NRCS handbook (NEH Part 630, Chapter 9 Hydrology) shows the acceptable range of values for each land cover. Those for croplands and natural ground cover are based on hydrologic conditions such as fair, poor, or good. In cases where one land cover is predominant, a potential for a systematic

error exists because of the impact of the selection of one significant value rather than the distribution of small random errors in a varied land cover model.

RCN value(s) can be adjusted to match a measured runoff volume provided that the resulting RCN falls within the logical limits of their respective ARC (Antecedent Runoff Conditions) limits. Consideration should be given to the use of $ARC \leq 2$ for the frequent events (1- up to 10-year storms). The reasoning is that these small storms are usually the result of short duration summer thunderstorms without the preceding ground wetting light rain. Greater storms (10-year and larger) are generally related to cyclonic storms of 12- to 48-hour duration where several hours of rain precedes that of the flood producing rain intensities. In this case, the ARC value is set at 2.

4.3.3 Land Use Categories and RCN Values

Land Use categories such as those used in GISHydro2000, are defined by the Maryland State Department of Planning. They are intended to be used for planning studies that extend beyond hydrologic modeling. The term land use is intended to describe a function rather than a hydrologic response. Because of this, there are several categories of land use that are not sufficiently descriptive of their corresponding hydrologic response and, if other than an insignificant part of the watershed, may require a more detailed evaluation and sub-classification. The following are a list of those land use categories that have these characteristics.

1. *Low Density Residential*. Residential lots of 2 acres and greater may produce a hydrologic response that is characteristic of other predominate land cover such as forest (or woods), meadow, grass, cropland, etc. If this land use is a significant portion of the watershed, an examination of aerial photographs may help better define the ground cover conditions.
2. *Institutional*. Institutional land use incorporates a wide range of uses including governmental offices, educational facilities, health facilities, etc. that exhibit land cover that ranges from parking lots to woods. It is important to examine available mapping and aerial photographs to subdivide this category to better simulate the hydrologic response.
3. *Extractive*. Extractive land use is defined by mining operations. There is a potential of a wide range of hydrologic responses depending on the nature of the type of mining. In particular, strip mining may respond as bare ground while a limestone quarry may act as a reservoir without an outlet. If this land use is a significant part of the watershed, the analyst should determine the particular type of mining. Many large mining operations include areas of active disturbance, areas of reclaimed land, and undisturbed areas of future excavations. More significantly, the hydrologic response of a mining operation is often determined by the way runoff is handled at the site. This could include peak storage, pumping, diversion swales and berms. To conform to the environmental

regulations, each active mining operation must have a stormwater, sediment control, and drainage plan that will define these elements. These plans are filed with the Maryland Department of the Environment, Bureau of Mines.

4. *Transportation.* Transportation includes major highways, interchanges, storage and maintenance yards for government highway agencies, Metro facilities, rail yards, and similar uses. Large interstate highway interchanges may include higher proportions of grass than pavement as compared to the highway right-of-way alone. Storage yards may be predominantly impervious surface while rail yards may be compacted gravel. Aerial photos and site inspections will enable the analyst to subdivide this category to better define the hydrologic response.

The default values of RCN for the above land uses in GISHydro have been derived using assumed percent imperviousness. These default values may not affect the runoff hydrograph if the corresponding areas are insignificant relative to the total watershed area. However, the engineer must decide if this is the case or provide more appropriate RCN values as described above.

5. *Cropland.* GISHydro lumps all cropland into a single land use category. Curve numbers for row crops (such as corn) are significantly different from those for small-grain (such as wheat). Inspection of satellite imagery may indicate the most common crop type. Satellite imagery may also indicate if cropland has been changed to residential, forest, or other land use. GISHydro also allows the selection of good/fair/poor hydrologic condition. This choice applies to all curve numbers selected in a GISHydro application.

4.3.4 Time-of-Concentration (overland/sheet flow component)

The application of several methods to calculate the overland component to the time-of-concentration can contain both random and systematic errors. This overland flow variable, by experience, has shown to be the most difficult to quantify of any of the input variables. The potential for a systematic error is high, which may be related to the experience or application techniques of the designer. This is one of the variables that should be examined for adjustment, especially if the sub-basins are small and the times-of-concentration are short.

4.3.5 Time-of-Concentration (shallow concentrated flow component)

Calculation of this portion of the T_c often generates a systematic error that results in underestimation of the flow time. The shallow concentrated flow portion of the time-of-concentration is generally derived using Figure 3.1 of the TR-55 manual (1986) or similar graphs. The flow velocities for Figure 15-4 of NEH Part 630, Chapter 15 Time of Concentration were developed from the information in Table 15-3.

Use of Figure 15-4 (and the values of Manning n and R listed in Table 15-3) may underestimate the travel time by overestimating the flow velocity for upper reaches of the shallow concentrated flow path. For shallow depth, the hydraulic radius approaches the depth of flow. In this shallow flow range the n value should represent a higher resistance than that which would be used for channel flow. Consider, for example, a wide grass swale with flow depths of less than 0.5 feet and grass 6-inches high or more. The Manning n value may fall between the 0.2 value for sheet flow and the 0.05 value for channel flow. In this case the designer might select a Manning n value of 0.10, which better represents this shallow concentrated flow. For specific shallow concentrated flow conditions, the designer can develop a new relationship of velocity to slope for more appropriate values of Manning n and the hydraulic radius.

4.3.6 Time-of-Concentration (channel flow component)

The selection of the channel component of the time-of-concentration can produce a systematic error that shortens the travel time. This can be attributed to three factors: incorrect estimates of the channel length, the Manning roughness coefficient and the bankfull cross-section.

Measuring the length of channel flow generally involves a scale error. Larger scale maps such as the USGS quad maps at 1:24,000 do not account for all the bends or meanders of a natural stream channel. Using a smaller scale map (1 in = 200 ft) will help reduce this error, but it will always be systematic. **Adjustments in channel lengths up to 25% when measuring from a USGS 1:24,000 map can be reasonable, provided the designer documents the decision.**

A single Manning n value selection to represent full cross sectional flow should be higher than an n value used for just the channel in a hydraulics model like HEC-RAS. This single n value must account for all hydraulic losses including high resistance overbanks, expansion and contraction losses, gradient changes, debris in flow, and local obstructions such as culverts. An increase of up to 50% in the n value is appropriate when using a simple trapezoidal cross section and single n value as is most often done when calculating the channel flow portion of the travel time.

The NRCS recommends that the velocity defined by the bankfull cross section be used to estimate the channel component of the time of concentration. The channel velocity is a function of the two-thirds power of the hydraulic radius. Because the cross section and, therefore, the hydraulic radius change from point to point along the channel, it may be difficult to determine the “typical” bankfull section. Care must be taken in the definition of the “typical” section because an error can lead to a significant overestimate or underestimate of the time of concentration in a large watershed that has a relatively long channel component.

4.3.7 Representative Reach Cross Section for Reach Routing

The selection of a representative cross section for reach routing can produce large systematic errors. WinTR-20 models with many reaches may exhibit cumulative systematic errors that will significantly affect the peak flow estimation. Since the WinTR-20 model is sensitive to the timing of hydrographs routed through long reaches, the typical routing cross section is a likely choice for adjustment.

Systematic errors in the selection of a “representative cross section” often produce reach routing that underestimates the hydrograph travel and underestimates the attenuation. The n value selection and length of reach are again suspect as in the time-of-concentration channel flow component described earlier.

Generally, representative cross sections are derived from contour maps supplemented by estimates of the channel geometry from field reconnaissance. In most cases surveyed cross sections are not available. GISHydro2000 uses the digital terrain data supplemented with empirical equations for the channel geometry.

The effect of stream storage is often underestimated. A good method to derive a representative cross section, if the data is available from prior studies or from FEMA, is to use the results of multiple HEC-2 and HEC-RAS runs. For each flow rate, the cumulative volume in the reach is divided by the total reach length. This results in a representative cross sectional area for each flowrate. However, cross sections for a hydraulic model such as HEC-RAS are usually taken so as to eliminate ineffective flow areas. These ineffective flow areas, while not contributing to the stream conveyance in the hydraulic model, do affect the attenuation of the hydrograph in the reach routing computation. This is most common in reaches that are characterized by wide, flat flood plains and wetlands. If stream storage is expected to be underestimated, the designer may be justified in increasing the area for each flow rate value on the WinTR-20 cross section table.

4.3.8 Reach Length

Reach lengths measured on large-scale maps (USGS Quad, 1:24,000) commonly underestimate the true length of a stream. Topographic maps of a scale of (1:2,400) and smaller will show more meanders and yield longer measurements. The effective stream length may not be the same for minor and severe events (2-year vs. 100-year). This is due to the fact that the more extreme events are conveyed over floodplains rather than in the channel, resulting in shorter flow paths. For minor events, such as 5-year and less, a longer reach length is appropriate due to the longer flow path in the meandering channel.

WinTR-20 accepts input for channel length and flood plain length. The designer may choose to use this option when channel and flood plain lengths are significantly different.

Figure 4-2 shows the relationship of total time-of-concentration to drainage area for gaged watersheds in Maryland. It can be used as a guide reference for comparison to calculated T_c values.

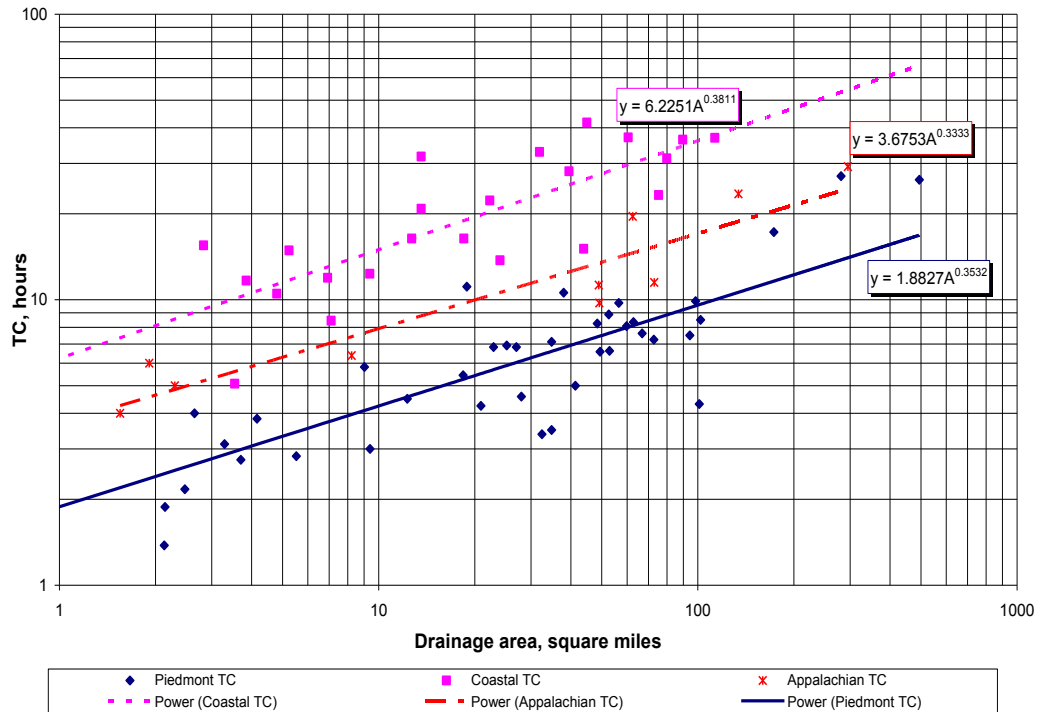


Figure 4-2: Time of concentration versus drainage area in Maryland.

4.3.9 Storage at Culverts

Experience shows that if the storage behind a culvert is less than 10% of the volume of runoff of the contributing drainage area, storage routing may be ignored without significant impact in the peak flow rate prediction. However, an accumulation of several culverts, each having storage potential near 10%, could affect the peak flow prediction and should be examined.

The measurement of storage behind a culvert is sometimes subject to systematic error, which tends to underestimate storage, especially for low flows. Topographic maps with large contours (10 or 20 feet) will not show small depressions and ditches that may contain storage that can affect the peak flow prediction of small storms.

4.3.10 Antecedent Runoff Condition (ARC)

Most applications will use the recommended value of $ARC = 2$ to represent the preliminary wetting of the ground surface and filling of small depressions. The $ARC = 2$, which represents the average watershed conditions when flooding occurs, is appropriate

for severe storms such as the 10-, 25-, 50-, and 100-yr events because they are generally related to the longer duration cyclonic events such as hurricanes and tropical storms with a longer duration. $ARC = 1$, which is the dry soil condition, may be more applicable to short duration summer thunderstorms in dry weather for the more frequent 1 to 10-year rainfall events.

One calibration procedure that may be employed for the more frequent storms of 10-year frequency and less is the global change in RCN values for fractional ARC conditions. The WinTR-20 program accepts integer values of 1, 2 or 3 for ARC and also fractional ARC values between 1 and 3

4.3.11 Dimensionless Unit Hydrograph

The dimensionless unit hydrograph varies by region. Refer to Table 3-1. The peak rate factor determines the generalized shape of the runoff hydrograph. In a subdivided watershed, the subarea runoff hydrographs are routed downstream and added to other runoff branches at various intervals that influence the shape of the downstream hydrograph. Therefore, the influence of the unit hydrograph selection diminishes as the watershed is subdivided. Conversely, the total stream hydrograph shape for single area watersheds or those with a few large subareas are more influenced by the selection of the unit hydrograph.

4.3.12 Rainfall Tables

The 24-hour rainfall distribution used in the WinTR-20 model has been shown to approximate closely most of the Maryland statistical rainfall data for large cyclonic storms. However, there is justification for selecting storm durations of less than 24 hours in certain circumstances. Until new research on storm structure is complete, the 25-, 50-, and 100-year storm events should be derived using the 24-hour design storm duration. The 2-, 5-, and 10-year storm events may be derived using either the 6-hour or 12-hour design storm duration. For watersheds having a total time of concentration of less than six hours, the 6-hour design storm duration may be more appropriate. For watersheds having a total time of concentration between 6 and 18 hours, the 12-hour design storm duration may be more appropriate. Therefore, if the flood estimates using the 24-hour storm do not lie between the regression estimate and the upper prediction limit, the analyst should use the 12-hour storm for the 25-, 50-, and 100-year events and the 6-hour storm for the 2-, 5- and 10-year events provided that the T_c to the design point is not greater than 6 hours.

Rainfall total depths for various frequency storms can be found in NOAA Atlas 14, Volume 2, dated 2006. This information is also available on the Web at:

<http://hdsc.nws.noaa.gov/hdsc/pfds/> .

Table 4-2: Table of WinTR-20 Variable Adjustment Limits for Calibration

| Variable | Error Type | Error Source Variable | Common Error Trend | Effect On Peak Q | Note | Adjustment Limits of variable in column 3 |
|---|------------|----------------------------------|--|----------------------|------|---|
| Area | Random | Area | High or Low | Increase or Decrease | | Not Recommended, check for non-contributing areas |
| RCN | Random | Table Selection | High or Low | Increase or Decrease | 4 | ± 10% for each category and within the limits of the NRCS guidelines. |
| T _c (Overland) | Systematic | n _o , L | Low | Increase | 3 | n _o up to 25%, L max = 100' |
| T _c (shallow conc.) | Systematic | Length, n | Low | Increase | 3 | Increase L up to 25%, n to ± 50% |
| T _c (channel) | Systematic | Length, n | Low | Increase | 3 | Increase L up to 25%, n to ± 50% |
| Representative X-section | Systematic | Area, n | Low | Increase | 3 | Area to ± 25%, n to ± 50% |
| Reach Routing Length | Systematic | Length | Low | Increase | 3 | Up to 25% for 1:24,000 maps, up to 19% for 1:2,400 maps |
| Storage at culverts | Systematic | Volume | Low | Increase | 1 | Up to 15% |
| ARC | Random | N/A | N/A | N/A | 2 | ARC= 2 is base value. See note below. |
| Dimensionless Unit Hydrogr. | Systematic | Peak Rate Factor | High or Low | Increase or Decrease | | Regional values of PRF in Maryland |
| Rainfall Tables | Systematic | Increment, intensity, & duration | High or Low | Increase or Decrease | | 48, 24, 12 and 6 hr. distributions |
| <p>Definitions: Random (errors) = either high or low from an expected mean value. Systematic (errors) = always higher or always lower than the calculated value. Low = calculated value lower than probable "actual" value. High = calculated value higher than probable "actual" value</p> | | | <p>Notes: 1. If the total volume of "reservoir" storage in the watershed is less than 10% of the total runoff volume, the effects of storage may be ignored. 2. ARC < 2 may be more appropriate for estimating the 10-year or more frequent storms. ARC > 2 may be appropriate for severe storms of 200 year and above. 3. Primary calibration variable. 4. Do not adjust the <u>weighted</u> RCN.</p> | | | |

Table 4-2 is presented as a guide to assist the designer in reevaluating of WinTR-20 input parameters that might be causing the peak discharges to fall outside the recommended fixed region regression equation bounds. The table is a guide suggesting that, because of the difficulties in the estimation process, the parameters of column 3 could be in error by as much as the value listed in the last column. The selected values of all parameters in column 3 must be supported by field and map investigations, be consistent with standard hydrologic practice and documented.

4.4 SENSITIVITY OF WINTR-20 RESULTS TO VARIATION IN INPUT VARIABLES

Experience has shown that the variables that affect hydrograph timing contain the greatest potential error of estimation and are, therefore, those that should be calibrated first. The hydrograph timing variables include each of the time-of-concentration components, the Representative Reach Cross Section, and the reach length.

If further calibration is necessary, re-evaluate the watershed storage by adding storage routing at culverts and other structures that create backwater. In particular, railroad culverts and embankments frequently cause backwater and reservoir storage. In very flat areas only a small rise in backwater may generate substantial amounts of storage that should be included as reservoirs in the WinTR-20 model. Occasionally, urban watersheds may experience a cumulative effect of storage from multiple road culverts. It may be practical to combine a series of small culverts with backwater into one reservoir to simplify modeling if accurate flows between these culverts are not needed.

Calibration of RCN values involves selecting values within the range recommended by NRCS for each land cover and soil type. Generally, the designer will be changing the RCN value for woods, meadows, or croplands from average to good or poor condition to adjust the peak discharge. **However, these changes must be documented.** In limestone regions, there may be some justification for a further reduction in RCN values.

The designer must compare the appropriate Fixed Region Regression Equation with the peak flow rates computed by the WinTR-20 model. In some circumstances, a decision may be made to adjust the WinTR-20 model input variables to yield peak flows that are closer to the results of the regional equation. In most instances, the adjustment of the WinTR-20 input variables should fall within the ranges shown in Table 4.2. However, the following factors should be evaluated before adjusting the WinTR-20 input:

Does the WinTR-20, using map and field study defined input parameters that are within the bounds of sound hydrologic practice, estimate peak discharges that fall between the regression estimate plus one standard error of prediction? If it does, adjustment of the WinTR-20 may not be necessary.

1. Are the values of the input variables used for the Fixed Region Regression Equation within the limits prescribed? Do the study watershed conditions lie within the bounds of the data from which the regional regression was derived? If the answer to either of these equations is no, then the regional equation results may not be valid.
2. If part of the study watershed lies within different regions, has the proportional regional equation been computed using the recommended USGS procedures?

3. Have the Fixed Region Regression Equation input variables been measured from the data source as used in the derivation of the regional equations (i.e., 30-meter DEM data or MDP land use data)? If not, the designer should determine if there is a possible bias by utilizing the same data source as used in developing the regression equations.
4. Are there reservoir storage, wetlands, quarries, or other features that may invalidate the regional equations? If these areas have been accounted for in the WinTR-20 model, there would be no benefit in a comparison to regional equation estimates.
5. Is the study area more than 10% impervious? If so, then the regional equations in the Eastern Coastal Plain and Appalachian Plateau Regions may not be valid.

If it is determined that the regional equation has been applied correctly and is valid for the study watershed, these results then may be used to adjust the input parameters of the WinTR-20 program. However, these WinTR-20 input parameter adjustments must be map- and/or field-justified and within the range of sound hydrologic practice. The designer will provide documentation that explains the selection and adjustment of each input parameter.

4.5 SPECIAL PROBLEMS WITH SMALL URBAN WATERSHEDS

Recent SHA experience has shown that the calibration of the WinTR-20 models to the Fixed Region Regression Equations for some small urban watersheds having drainage areas of less than two square miles may be problematic. In particular, small urban watersheds with predominant Type A or B soils may generate WinTR-20 peak discharges that are well below the target range calculated by the Fixed Region Regression Equations. In these cases, the Panel suspects that the standard RCN table values may not satisfactorily describe this urban condition and recommends one or more of the following additional calibration adjustments:

1. Use RCN values for urban land that are derived using “fair” or “poor” hydrologic conditions rather than “good”. (The urban RCN values in TR-55 were derived using proportions of impervious RCN = 98 and open space RCN based on soil type and “good” hydrologic condition.) See Table 4.3 below.
2. Subdivide generalized land use categories. Predominant land use in particular categories may result in a false hydrologic response. Refer to Section 4.3.3 for further discussion.
3. Some small urban watersheds may respond in more complicated ways than those accounted for in standard hydrologic applications. For instance, a watershed model that is highly urban may produce higher peak discharges when the shorter “dominant” time-of-concentration from large impervious areas is applied rather

than the longest T_c that is computed from non-impervious upland areas. Similarly, using the “paved” rather than the “non-paved” option for computation of the shallow concentrated flow segment of the T_c may be more appropriate where a significant proportion of non-stream channel flow is carried in pipes and street gutters.

Table 4-3: Urban Curve Numbers

| <i>Good conditions</i> | | | | | |
|------------------------|--------------|--------|--------|--------|--------|
| Type | Impervious % | A soil | B Soil | C Soil | D Soil |
| 1/8 acre | 65 | 77 | 85 | 90 | 92 |
| 1/4 acre | 38 | 61 | 75 | 83 | 87 |
| 1/3 acre | 30 | 57 | 72 | 81 | 85 |
| 1/2 acre | 25 | 54 | 70 | 80 | 85 |
| 1 acre | 20 | 51 | 68 | 79 | 84 |
| 2 acre | 12 | 46 | 65 | 77 | 82 |
| Commercial | 85 * | 89 | 92 | 94 | 95 |
| Industrial | 72 * | 81 | 88 | 91 | 93 |

| <i>Fair conditions</i> | | | | | |
|------------------------|--------------|--------|--------|--------|--------|
| Type | Impervious % | A soil | B Soil | C Soil | D Soil |
| 1/8 acre | 65 | 81 | 88 | 91 | 93 |
| 1/4 acre | 38 | 68 | 80 | 86 | 89 |
| 1/3 acre | 30 | 64 | 78 | 85 | 88 |
| 1/2 acre | 25 | 61 | 76 | 84 | 88 |
| 1 acre | 20 | 59 | 75 | 83 | 87 |
| 2 acre | 12 | 55 | 72 | 81 | 86 |
| Commercial | 85 * | 91 | 94 | 95 | 96 |
| Industrial | 72 * | 84 | 90 | 93 | 94 |

| <i>Poor conditions</i> | | | | | |
|------------------------|--------------|--------|--------|--------|--------|
| Type | Impervious % | A soil | B Soil | C Soil | D Soil |
| 1/8 acre | 65 | 88 | 91 | 94 | 95 |
| 1/4 acre | 38 | 79 | 86 | 91 | 92 |
| 1/3 acre | 30 | 77 | 85 | 90 | 92 |
| 1/2 acre | 25 | 76 | 84 | 89 | 91 |
| 1 acre | 20 | 74 | 83 | 88 | 91 |
| 2 acre | 12 | 72 | 81 | 87 | 90 |
| Commercial | 85 * | 94 | 95 | 96 | 97 |
| Industrial | 72 * | 90 | 93 | 95 | 95 |

*Impervious values are based on buildings, parking lots, driveways, and related landscaped edges. Open space and woods are not included.

4.6 DERIVING ULTIMATE DEVELOPMENT PEAK FLOW RATES USING THE ADJUSTED WinTR-20 MODEL

In most cases, the designer will derive the “Ultimate Development” peak flow rates by only changing the RCN values in the calibrated Existing Land Cover model. The new RCN values for each sub-basin are computed to reflect the future conditions using zoning maps or comprehensive planning maps. The other existing Land Cover model parameters usually remain unchanged. There may be instances where ultimate development channelization, enclosure, or restoration will result in velocities that are significantly different from those under existing conditions. In that situation the changed time of concentration would have to be incorporated. The focus on stream water quality, stormwater management, and wetland and habitat preservation in Maryland and the relatively few large river flood prone areas has inhibited the construction of major channel improvements, long large diameter pipe systems, and flood conveyance channel-levee systems. Of course, there may be exceptions to this assumption, which should be examined on a case-by-case basis. If justified, the hydrograph timing parameter can also be modified to reflect expected significant changes to stream channel hydraulic characteristics. Figure 4-3 below describes this procedure.

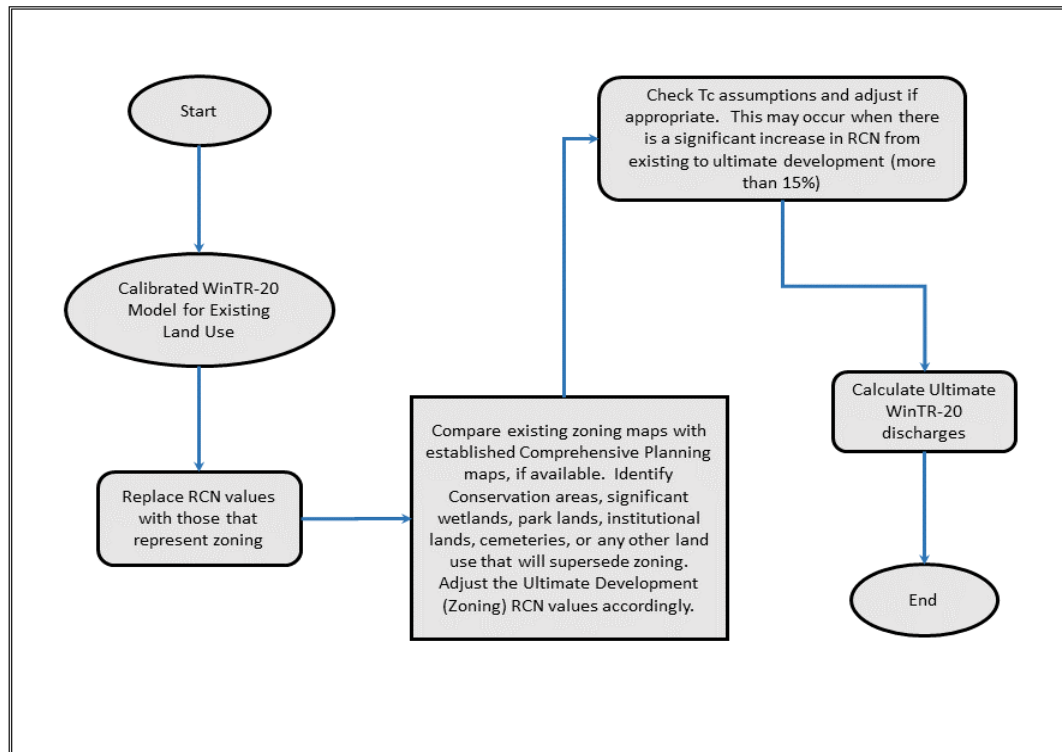


Figure 4-3: Flow chart for changing existing land use to Ultimate Development

4.6.1 Ultimate Development as Defined Under COMAR

The Code of Maryland Regulations (COMAR), Title 08, Subtitle 05, Chapter 03, “Construction on Non-Tidal Waters and Floodplains,” states:

F. Unless waived by the Administration, hydrologic calculations shall be based on the ultimate development of the watershed assuming existing zoning.

In the creation of a WinTR-20 hydrologic model for ultimate conditions, it is common practice for the designer to derive RCN values for each zoning type for the jurisdiction of the watershed. These “ultimate development” RCN values are substituted for the “existing” RCN values and an “ultimate development” model is constructed. This model, when the regulatory 2-, 10-, and 100-yr rainfall is applied, results in “ultimate development” peak flow rates. These peak flow rates then are used for structure design or floodplain delineation and become the benchmark for regulatory evaluation. However, there are several pitfalls that both the practitioner and regulator should consider in its application. They are:

Many zoning districts cover a wide range of permitted uses that have significant variability in hydrologic characteristics. There are two methods of accounting for the wide variation: (1) use more subdivision of the zoning divisions into more homogeneous areas; (2) use weighted RCN for the zoning district based on the actual land use and hydrologic soil group.

1. Existing agricultural areas that are zoned for large multi-acre lots may yield lower RCN values under “ultimate development” than under the existing conditions of active croplands. Common practice has been to select the higher of the two RCN values. In some cases this situation may be realistic if the hydrologic condition of the area was poor. However, this case is often unidentified or ignored in large, variable land use models.

2. Many modern zoning types do not lend themselves to simple conversion to an RCN value. Several of these zoning types are related to ecological and historic preservation or recreation that have a wide range of possible future RCN values.

Many jurisdictions permit clustered or planned unit development that typically creates high density mixed development interspersed with natural preservation areas. The resulting land cover then bears no resemblance to the originally described zone type; hence, the ultimate RCN value derived from it is unreliable.

3. The creation and editing of zoning maps is a political process and is not intended to represent future hydrologic conditions. A jurisdiction wishing to promote industrial development, for example, may designate large areas for that zoning classification to attract industry, yet have no realistic expectation that all such zoned land will be developed. Similarly, rural jurisdictions may find it politically preferable to label vast

areas as “agricultural” or “conservation” but expect to re-zone specific sites if a non-conforming, intensive use is deemed desirable. In all such cases the direct conversion from zoning type to RCN is invalid as a prediction of future peak flow rates.

4. Current environmental regulations inhibit full build out of many residential and other intensive use zoning districts. For example, a district that may permit 16 units per acre seldom achieves full density. This is due to restrictions such as wetlands, road systems, forest conservation, and recreational or open space reservations.

While these pitfalls are known to many in the hydrologic profession, the common rationalization of the use of zoning is that it is the best, or simplest, way to derive a future development model that will ensure that newly designed hydraulic structures are not under-designed. In other words, the regulation requiring the use of “ultimate development” peak flow rates for design is simply a hydrologic safety factor. Unfortunately, because of the unreliable nature of the future land use – zoning relationship, the use of existing zoning to derive “ultimate” peak flow rates will result in undefined and highly variable factors of safety for different watersheds. This is not a correct application of factors of safety in a hydrologic analysis.

The selection of a factor of safety to apply to a calculated peak flow rate should be based on the following considerations:

1. The potential for land use changes
2. The timing of land use change
3. The potential risk of failure of the hydraulic structure
4. The economic life and useful life of the hydraulic structure
5. The reliability of the computational method

Item number 5 is usually addressed in the selection of input values for each method and is discussed in other chapters of this report. Items 3 and 4 are often considered by selecting the flow or storm frequency. In general, large, expensive structures or ones that could endanger the public are designed for flows of lesser frequency such as the 100-year (1% annual change of exceedance) for major interstate highways. Minor drainage systems are designed using the 10-year (10% annual chance of exceedance) event.

Item numbers 1 and 2, as discussed above, are not reliably estimated by zoning district. A better estimate of Items 1 and 2 can be derived from comprehensive planning maps. Comprehensive planning maps are prepared for most major jurisdictions in the state. Most plans include a 20-year projection and are available in both map and digital GIS form.

4.6.2 Using Comprehensive Planning Maps for Future Hydrologic Conditions

Comprehensive planning maps, if available, offer a better tool for the designer to predict the future land use of a watershed than the zoning map. They incorporate the key

elements of time and spatial distribution that are not apparent in zoning maps. The designer can compare these maps to the zoning maps to determine the following:

1. Does the 20-year comprehensive plan approach complete build-out as defined by the zoning maps? If not, it may be better to use the comprehensive plan as the more realistic future projection.
2. Does the comprehensive plan define specific land use within a general zoning type? Comprehensive plans will show areas of likely growth based on existing and planned transportation networks, proximity to growth centers, and water and sewer service areas. They will also account for special environmental or historic areas and buffers, critical areas, unfavorable terrain, proximity to uninviting land use such as landfills and airports, and similar conditions that are likely to inhibit growth.
3. Will the intensively urbanized areas induce in-fill type development according to zoning or will the general character of the urban area change? Comprehensive plans may account for the trends for more urban green space or the conversion from heavy industrial to office parks, recreation/tourism, or mixed residential/commercial use.

The current regulation permits the Administration (now Maryland Department of the Environment) to waive the requirement of current zoning to define ultimate development. This requirement should be waived in favor of the Comprehensive Planning Maps, wherever appropriate.

4.7 CALIBRATING INDIVIDUAL SUB-AREAS IN LARGE WATERSHEDS

Generally, the calibration of a WinTR-20 model is accomplished at the design point (outlet) of the watershed. However, there may be logical reasons to calibrate large subareas of a watershed individually to regression equations derived from the data for those subareas. Some of these circumstances could be:

1. A watershed with subareas that have significant differences in the regression predictor variables. A large subarea may be highly urbanized or contain a large percentage of carbonate bedrock or dense forest compared to the other subareas. In such cases, the assumption of homogeneity of data may not adequately model the subarea timing.
2. The watershed's stream network does not have a typical branching shape, i.e. it may have large subareas converging near the outlet making subarea hydrograph timing critical to the combined peak flow development.
3. There is a stream gage in a major subarea that can be used to better model that segment of the overall model.

CHAPTER FIVE

5 Regression Equations for Estimating Low Flows for Fish Passage in Maryland

5.1 EXECUTIVE SUMMARY

The Maryland State Highway Administration requires low flow values for designing culverts to accommodate fish passage. Regression equations were developed for estimating the 2- and 10-year 90- and 120-consecutive day annual low flows for streams in Maryland with drainage areas less than 10 square miles. The low flow frequency analyses at the 50 gaging stations were performed using the U.S. Army Corps of Engineers (USACE) HEC-SSP program (USACE, 2010) and were based on the annual minimum 90- and 120-consecutive day low flows. The statistically significant explanatory variables in the regression equations were drainage area, in square miles; impervious area in percent of watershed area; and land slope in feet per foot. The regression equations are applicable for rural and urban streams. The standard errors of the regression equations ranged from 45.1 to 53.3 percent. The regression equations are given below:

2-year 90-day low flow (Q_{2_90}):

$$Q_{2_90} = 0.635 DA^{0.979} (IA + 1)^{0.160} LANDSL^{0.242} \quad SE = 52.2 \text{ percent}$$

10-year 90-day low flow (Q_{10_90}):

$$Q_{10_90} = 0.420 DA^{0.816} (IA + 1)^{0.177} LANDSL^{0.232} \quad SE = 53.3 \text{ percent}$$

2-year 120-day low flow (Q_{2_120}):

$$Q_{2_120} = 0.670 DA^{1.019} (IA + 1)^{0.147} LANDSL^{0.208} \quad SE = 45.1 \text{ percent}$$

10-year 120-day low flow (Q_{10_120}):

$$Q_{10_120} = 0.463 DA^{0.851} (IA + 1)^{0.193} LANDSL^{0.236} \quad SE = 50.2 \text{ percent}$$

where Q_{T_D} is discharge in cfs for return period T [yr] and duration D [days]
DA is drainage area in sq mi
IA is impervious area in percent of watershed area
LANDSL is average watershed land slope in ft/ft
SE is standard error

The watershed characteristics used in defining these regression equations are more indicative of flood flows and improvements in the regression equations could be realized through further research on:

- Development of geologic or groundwater characteristics that should be highly correlated with low flows, and
- Investigation into seasonal flow characteristics that might be more indicative of fish spawning and migration in Maryland streams.

A limited analysis of seasonal streamflow characteristics was performed at 16 gaging stations scattered throughout the State. The regression equations from this analysis are provided for informational purposes.

5.2 INTRODUCTION

Estimates of discharges are needed in the design of culverts in Maryland to facilitate fish passage. This study was undertaken to develop regression equations for estimating design flows for small watersheds in Maryland for which culverts are used as the hydraulic structure of choice. The original intent of the analysis was to develop regression equations for estimating various recurrence intervals of the annual or seasonal 7-day low flow (lowest 7-day consecutive daily flow on an annual or seasonal basis). An analysis of the U.S. Geological Survey (USGS) gaging station data in Maryland revealed about 90 gaging stations with 10 or more years of daily flow data where the drainage area was less than 50 square miles. An analysis of annual 7-day low flows for 16 stations with drainage areas less than 50 square miles indicated that the 2- and 10-year 7-day low flows were often zero or close to zero. Therefore, it was decided to analyze low flows with durations of 14 to 120 days to obtain larger flows that might be useful in designing culverts for fish passage.

The Maryland State Highway Administration (SHA) indicated that culverts are primarily used on watersheds with drainage areas less than 10 square miles. There are 50 gaging stations in Maryland with more than 10 years of daily flow record where the drainage area is less than 10 square miles. The 50 stations used in the analysis, and their locations are shown in Figure 1. As shown in Figure 1, most of these stations are in the Piedmont Region in the vicinity of the City of Baltimore, Baltimore County, or adjacent counties.

Guidance from the Federal Highway Administration on hydrology for fish passage is documented in Hydraulic Engineering Circular (HEC) No. 26, First Edition, *Culvert Design for Aquatic Organism Passage*, dated October 2010 (Kilgore and others, 2010). As defined in HEC-26, there are two flows of interest:

- High passage flow, Q_H , represents the upper bound of discharge at which fish are believed to be moving within the stream, and

- Low passage flow, Q_L , is the lowest discharge for which fish passage is required, generally based on minimum flow depths required for fish passage.

The emphasis in this study was to estimate a low flow discharge that is similar to Q_L as defined in HEC 26. Low flow analyses for the annual minimum discharge for durations of 14, 30, 60, 90, and 120 consecutive days were performed for the 50 stations in Figure 1. The stations used in the analysis are listed in Attachment 1.

In the fall of 2013, SHA convened a conference call with fish biologists with the Maryland Department of Natural Resources and the University of Maryland to gain insight into what might be reasonable design flows to analyze. The conclusions from that call were:

- The two primary spawning periods for fish species in Maryland are March to June and September to November, and
- Fish passage is critical year round, and annual flow characteristics are needed.

Based on the conference call, it was not clear whether seasonal or annual flow characteristics were most important. Therefore, the decision was made to analyze annual minimum (not seasonal) n-day discharges at the 50 stations shown in Figure 5-1.

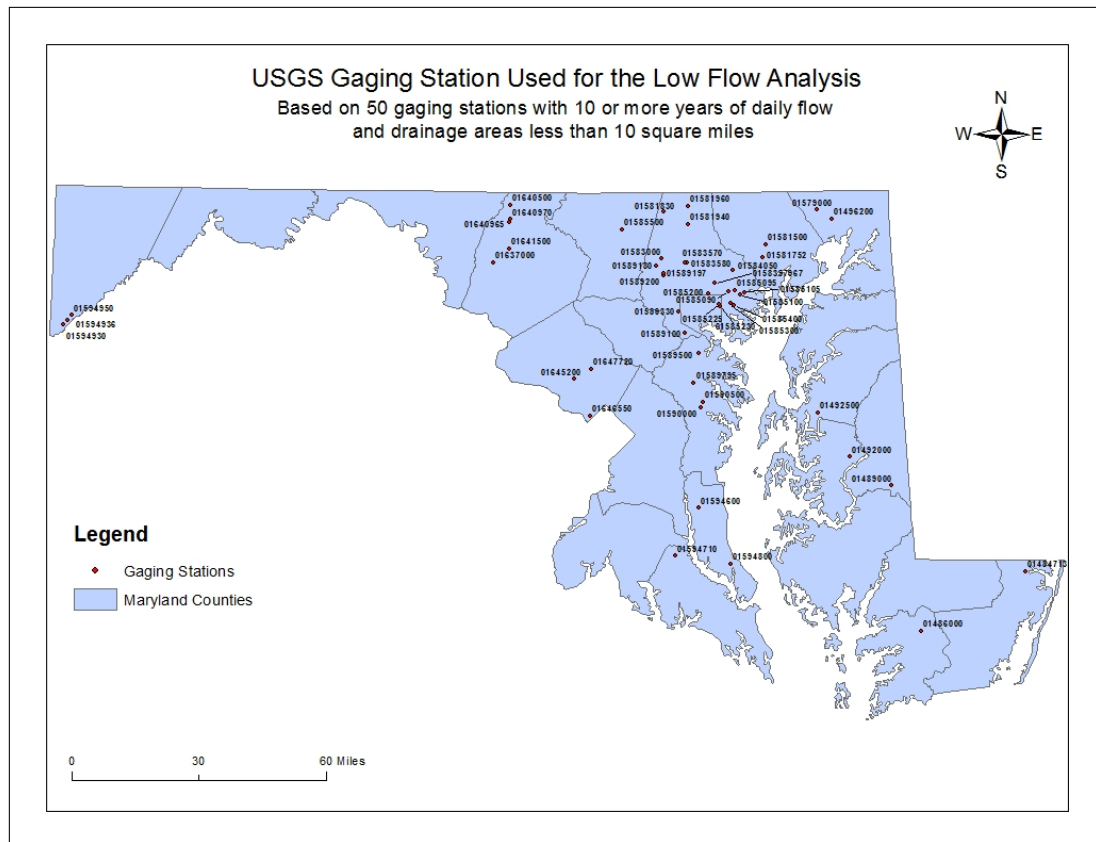


Figure 5-1: Location of 50 gaging stations used in the analysis where there are 10 or more years of daily flows and the drainage area is less than 10 square miles

5.3 LOW FLOW FREQUENCY ANALYSIS

Mean daily flows for the 50 stations in Figure 1 and Appendix 1 were retrieved from the USGS National Water Information System (NWIS) from the following web site (http://nwis.waterdata.usgs.gov/md/nwis/dv/?referred_module=sw). The U.S. Army Corps of Engineers (USACE) HEC-SSP Program (Version 2.0, dated October 2010) was used to estimate the annual minimum discharges for 14-, 30-, 60-, 90- and 120-consecutive day durations. The climatic year of April 1 to March 31 was used in this analysis to insure that the low flow period in the late summer and early fall (namely July to October) were within the same year. A Pearson Type III frequency distribution was fit to the logarithms of the annual minimums and the untransformed data (discharges in cubic feet per second (cfs)) using the HEC-SSP program. The Pearson Type III distribution was chosen because it is a 3-parameter distribution that is flexible in fitting low flow data and has been used historically by USGS for this type of analysis. Estimates of the 2- and 10-year discharge were summarized for durations of 14-, 30-, 60-, 90-, and 120-days for the 50 gaging stations.

An examination of the data revealed that the 2- and 10-year flows for durations of 14-, 30-, and 60-days were frequently zero or close to zero so the remaining analysis focused on the longer 90- and 120-day duration flows. In addition, the untransformed analysis sometimes resulted in the 10-year 90- or 120-day flow being negative so the analysis was limited to using the logarithms of the 90- and 120-day flows. The following four flow characteristics, based on the logarithms of the discharges, were used in the regression analysis:

- 2-year 90-day discharge,
- 10-year 90-day discharge,
- 2-year 120-day discharge, and
- 10-year 120-day discharge.

Generally there was not a significant difference in the 2- and 10-year discharges based on the logarithmic transformed analysis and the untransformed analysis. A comparison is given in Figure 5-2 for the 2-year 120-day discharges based on the logarithmic transformation (logs) and the untransformed (cfs values) analyses. As shown in Figure 5-2, there is a slight tendency for the 2-year 120-day discharge to be higher when using the untransformed data. The trend line through the data in Figure 5-2 is nearly the equal discharge line (constant of 1 and exponent of 1). The results from the transformed analysis were used in the regression analysis because occasionally the untransformed analysis resulted in a negative flow for the 10-year flow as noted earlier. This was an artifact of fitting the Pearson Type III distribution to the untransformed low flow data. For the 2-year 120-day analysis, there were no negative flows for the untransformed analysis, so the data in Figure 5-2 are for all 50 stations.

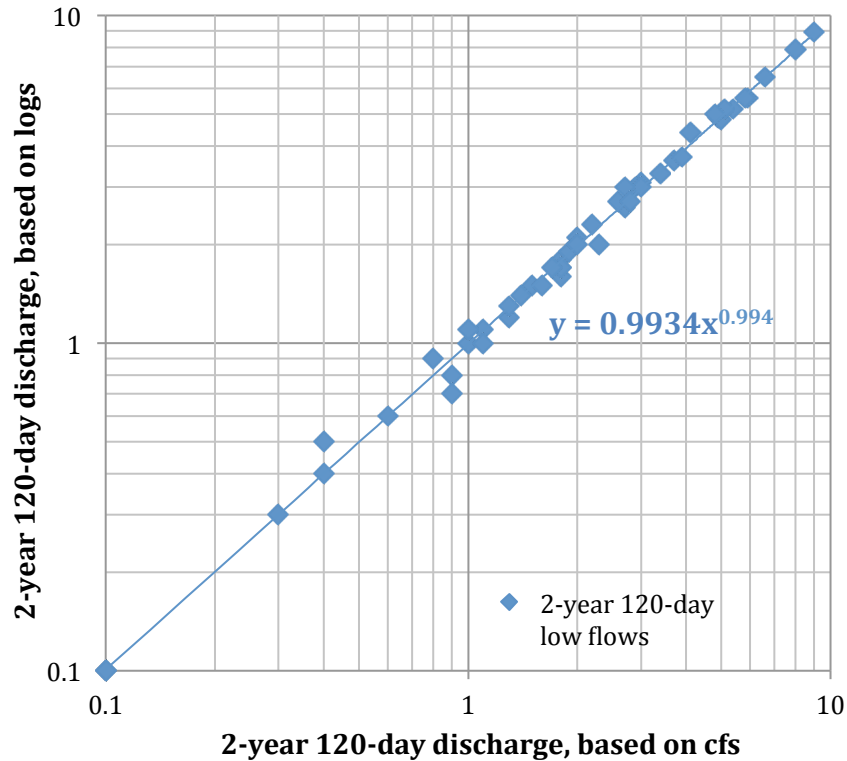


Figure 5-2: Comparison of the 2-year 120-day discharges based on the logarithmic transformed (logs) and the untransformed analysis (cfs values)

5.4 REGRESSION ANALYSIS FOR ANNUAL MINIMUM N-DAY LOW FLOWS

The watershed characteristics used in the regression analysis were obtained from the ongoing and previous flood discharge regression analyses for the State of Maryland. These watershed characteristics included:

- Drainage area, in square miles;
- Impervious area, in percent of the drainage area;
- Land slope, in feet per foot, slope of the watershed, not the main channel (The average land slope is the average of all neighborhood slopes determined along the steepest direction of flow. These are the local slopes determined from the upstream to downstream pixel for each pixel within the watershed.);
- Channel slope, in feet per mile, calculated as the slope between two points located at 10 and 85 percent of the distance along the main channel;
- Forest cover, in percent of the drainage area;
- Hydrologic soil groups A, B, C and D, in percent of the drainage area, based on SSURGO data;

- Basin relief, in feet, calculated as the average elevation of all points within the watershed minus the elevation at the outlet of the watershed; and
- Channel length, in miles, calculated as the distance along the main channel from the outlet of the watershed to the basin divide.

These watershed characteristics are relevant to flood runoff and are not necessarily the best suite of characteristics for estimating low flows. For example, no geological characteristics were determined as part of this analysis because it was beyond the scope of work. A future research effort should involve the determination of characteristics more related to geology and ground water contributions. None of the 50 small gaging stations are impacted by karst terrain, so the percentage of limestone in the watershed was not used as an explanatory variable.

Many of the watershed characteristics used in the regression analysis are correlated and the objective of any regression analysis is to use explanatory variables that are reasonably independent. For this regression analysis, all variables were converted to logarithms and a linear regression analysis was performed using the Statistical Analysis System (SAS) software (SAS Institute, Cary, North Carolina). Table 5-1 is the correlation matrix for the logarithms of the watershed characteristics for the 50 gaging stations (N=50) and the following observations are pertinent (highlighted in Table 5-1):

- Drainage area (lda) and channel slope (lcsl) have a correlation of -0.428,
- Impervious area (lia) and forest cover (lfor) have a correlation of -0.725,
- Land slope (llandsl) and channel slope (lcsl) have a correlation of 0.808, and
- The sum of A and B soils (labsoil) and the sum of C and D soils (lcdsoil) have a correlation of -0.714.

Basin relief and channel length were not shown in Table 5-1 because these data are not available for all 50 stations. However, these variables are highly correlated with other variables shown in Table 5-1 as follows:

- Basin relief and land slope have a correlation of 0.884,
- Basin relief and channel slope have a correlation of 0.928,
- Channel length and drainage area have a correlation of 0.899.

Basin relief and channel length were obtained from the September 2010 Maryland Hydrology Panel report (<http://www.gishydro.eng.umd.edu/panel.htm>) and evaluated for possible use in the regression analysis but were not available for all 50 stations in the current analysis. Because they are highly correlated with other variables used in the analysis, no attempt was made to estimate these data for all stations, and basin relief and channel length were not used in the regression analysis.

Table 5-1: Correlation matrix for the watershed characteristics for the 50 gaging stations used in the regression analysis

| Pearson Correlation Coefficients, N = 50 | | | | | | | |
|--|----------|----------|----------|----------|----------|----------|----------|
| Prob > r under H ₀ : ρ = 0 | | | | | | | |
| | lda | lia | llandsl | lcsl | lfor | labsoil | lcdsoil |
| lda | 1.00000 | -0.22784 | -0.07963 | -0.42811 | 0.23694 | -0.00722 | 0.07624 |
| | | 0.1115 | 0.5825 | 0.0019 | 0.0976 | 0.9603 | 0.5987 |
| lia | -0.22784 | 1.00000 | -0.10369 | -0.00095 | -0.72478 | 0.26816 | -0.10061 |
| | 0.1115 | | 0.4736 | 0.9948 | < 0.0001 | 0.0597 | 0.4869 |
| llandsl | -0.07963 | -0.10369 | 1.00000 | 0.80765 | 0.23026 | -0.13750 | -0.16714 |
| | 0.5825 | 0.4736 | | < 0.0001 | 0.1077 | 0.3410 | 0.2460 |
| lcsl | -0.42811 | -0.00095 | 0.80765 | 1.00000 | 0.06987 | -0.22202 | -0.00564 |
| | 0.0019 | 0.9948 | < 0.0001 | | 0.6297 | 0.1212 | 0.9690 |
| lfor | 0.23694 | -0.72478 | 0.23026 | 0.06987 | 1.00000 | -0.25901 | 0.06355 |
| | 0.0976 | < 0.0001 | 0.1077 | 0.6297 | | 0.0693 | 0.6611 |
| labsoil | -0.00722 | 0.26816 | -0.13750 | -0.22202 | -0.25901 | 1.00000 | -0.71376 |
| | 0.9603 | 0.0597 | 0.3410 | 0.1212 | 0.0693 | | < 0.0001 |
| lcdsoil | 0.07624 | -0.10061 | -0.16714 | -0.00564 | 0.06355 | -0.71376 | 1.00000 |
| | 0.5987 | 0.4869 | 0.2460 | 0.9690 | 0.6611 | < 0.0001 | |

Highlighting: sample correlation contradicts the null hypothesis of zero correlation.

If two variables are highly correlated, then they are explaining the same variability in the dependent variable (discharge) and, likely, one of the explanatory variables will not be statistically significant in the regression analysis. For the explanatory variables shown in Table 5-1, the four most statistically significant variables for estimating the 2- and 10-year 90-day discharge and the 2- and 10-year 120-day discharge were drainage area, impervious area, land slope, and channel slope, with channel slope being the least significant. For the 2-year 90-day and 120-day discharge analyses, the inclusion of channel slope reduced the standard error by 2.8 and 1.4 percent, respectively. Channel slope was not used in the final regression equations because of the small reduction in standard error and the significant correlation with both drainage area and land slope.

The 90- and 120-day discharges were chosen for the regression analysis because the discharges are larger and generally greater than zero. Very small values of discharges are

not useful in designing a culvert. However, there were still two gaging stations (01583570 and 01589180) where the 10-year 90- and 120-day low flows were zero (see Attachment 1). Because all data were transformed to logarithms for the linear regression analysis, a small constant of 0.1 cfs was added to all the 10-year discharges to avoid taking the logarithm of zero. This implies that a constant of 0.1 cfs should be subtracted for the regression estimate for the 10-year equations. For all 50 gaging stations, the 2-year 90- and 120-day lows were greater than zero, so no constant was added in the 2-year analysis.

The regression equations for estimating the 2- and 10-year 90- and 120-day discharges are based on drainage area (DA), in square miles; impervious area (IA), in percent of the drainage area; and land slope (LANDSL), in feet per foot. A constant of 1 was added to impervious area to avoid taking the logarithm of zero. The equations are as follows:

2-year 90-day low flow (Q_{2_90}):

$$Q_{2_90} = 0.635 DA^{0.979} (IA+1)^{0.160} LANDSL^{0.242} \quad \text{Std. error} = 52.2 \text{ percent} \quad (5-1)$$

10-year 90-day low flow (Q_{10_90}):

$$Q_{10_90} = 0.420 DA^{0.816} (IA+1)^{0.177} LANDSL^{0.232} \quad \text{Std. error} = 53.3 \text{ percent} \quad (5-2)$$

2-year 120-day low flow (Q_{2_120}):

$$Q_{2_120} = 0.670 DA^{1.019} (IA+1)^{0.147} LANDSL^{0.208} \quad \text{Std. error} = 45.1 \text{ percent} \quad (5-3)$$

10-year 120-day low flow (Q_{10_120}):

$$Q_{10_120} = 0.463 DA^{0.851} (IA+1)^{0.193} LANDSL^{0.236} \quad \text{Std. error} = 50.2 \text{ percent} \quad (5-4)$$

The exponent on drainage area (DA) is close to 1.0 and higher than the exponents in the flood discharge regression equations. An exponent close to 1.0 implies the entire watershed is contributing discharge namely because the discharge is coming from ground water flow and not direct runoff. The exponent on impervious area (IA) is positive, implying that the more highly impervious watersheds are yielding more discharge than similar sized rural watersheds. This is likely related to the production of water in the more urban watersheds through lawn watering, residential and commercial water use, and businesses like car washes or car dealerships. The exponent on impervious area is larger for the 10-year equation than the 2-year equation, possibly implying that regulation by water use has a larger impact on the smaller discharges. Land slope has a positive exponent and may reflect the ground water gradient.

There were some outlier stations for all four equations but the outlier stations varied among the equations. There were both high and low outliers so the resultant equations do not appear to be biased. It was not obvious why certain stations were outliers so all 50 station were used in defining the regression equations.

As noted earlier, 34 of the 50 stations used in the analysis are in close proximity to the City of Baltimore, Baltimore County, or adjacent counties in the Piedmont Region. Because many of the stations are in urban areas, 21 of the 50 stations used in the regression analysis have impervious areas greater than 10 percent. There were only 16 stations in the Eastern and Western Coastal Plains and the Appalachian Plateau, so it was not possible to develop separate equations for the different hydrologic regions. Equations 1-4 are applicable statewide within the following limits:

- Drainage areas from 0.13 to 10 square miles,
- Impervious area from 0 to 45.4 percent, and
- Land slope from 0.0035 to 0.155 feet per foot.

Figure 5-3 illustrates the relation between the gaging station estimates of the 2-year 120-day discharge and drainage area for all 50 stations. Figure 5-3 illustrates that, on average, the 2-year 120-day discharge is 0.1 cfs at about 0.2 square miles, 0.54 cfs at 1.0 square mile and about 5 cfs for 10 square miles. Figure 5-3 further illustrates that there is a reasonable linear relation between the logarithms of the 2-year 120-day discharge and drainage area.

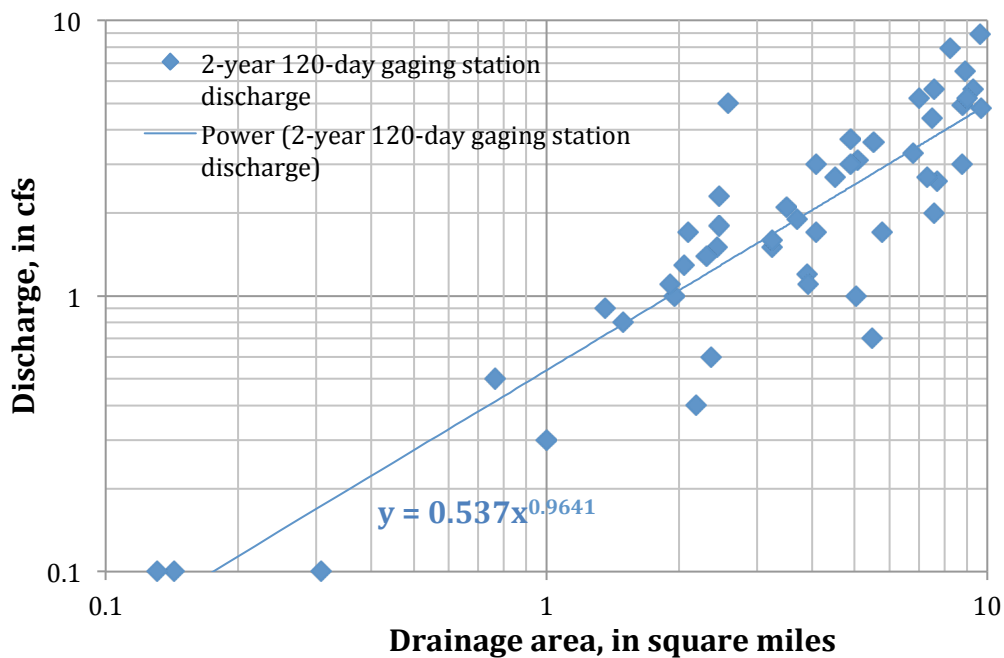


Figure 5-3: Relation between the gaging station 2-year 120-day discharge and drainage area for all 50 stations

Figure 5-4 compares the estimates of the 2-year 120-day discharge from Equation 3 (regression estimate) with gaging station estimates given in Appendix 1. The comparison is made for the 2-year 120-day discharge because these discharge values are the largest and potentially most useful for designing culverts for fish passage.

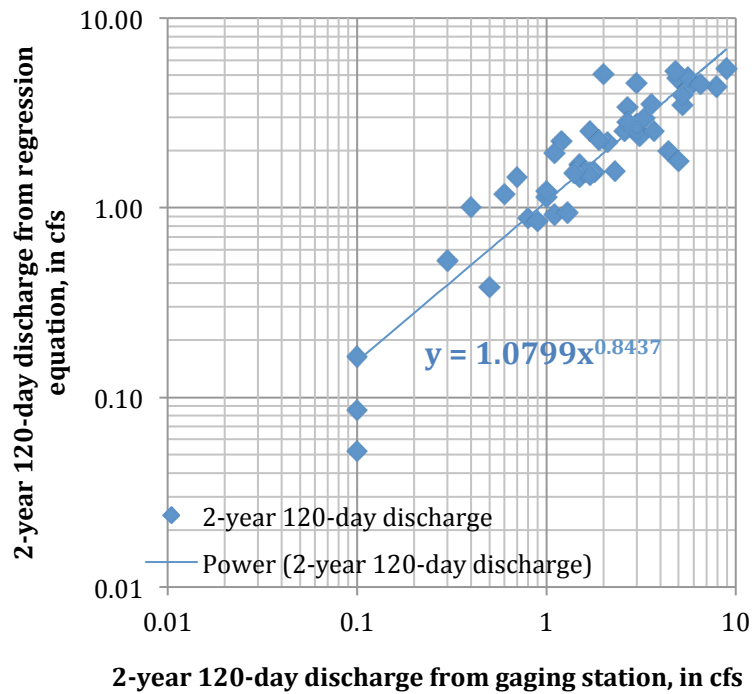


Figure 5-4: Comparison of the 2-year 120-day discharge from Equation 3 to the gaging station estimates

There are three points in Figure 5-4 where the gaging station estimate of the 2-year 120-day discharge is 0.1 cfs. The discharges are reported to the nearest 0.1 cfs in the USACE HEC-SSP program so the gaging station estimates are reported to that accuracy. The lower three points in Figure 5-4 give the impression there may be a non-linear relation between the regression and gaging station estimates. However, if the three gaging station estimates of 0.1 cfs are omitted from the figure, the remaining points define a reasonable linear trend (see Figure 5-5).

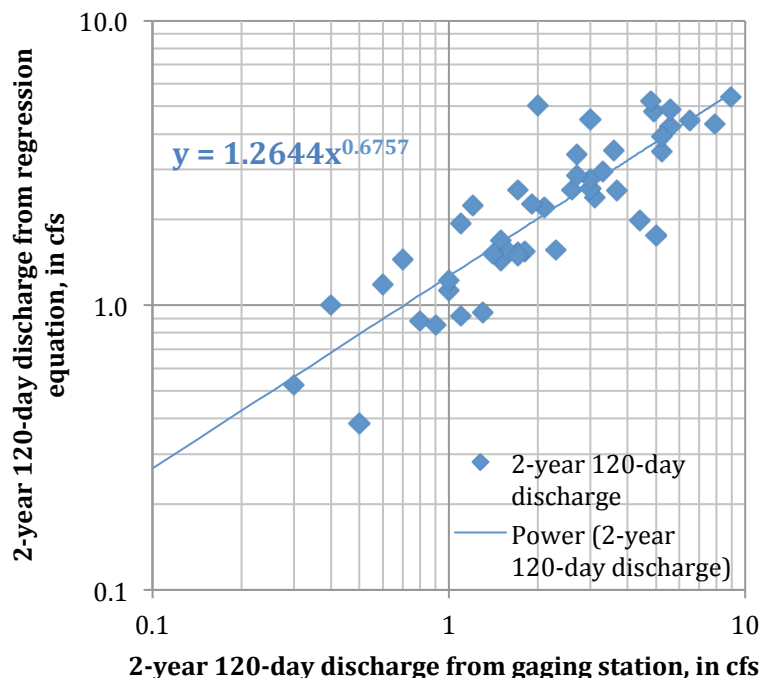


Figure 5-5. Comparison of the 2-year 120-day discharge from Equation 3 to the gaging station estimates without the three gaging station estimates of 0.1 cfs

5.5 REGRESSION ANALYSIS FOR SEASONAL LOW FLOWS

Based on interaction with fish biologists with the Maryland Department of Natural Resources and the University of Maryland, it was determined that fish migration in Maryland is prevalent in the Spring during the March to June time period (most species) and in the Fall during the September to November time period (trout). Flows during times of fish migration may be useful flow characteristics to analyze. Data for 16 gaging stations with drainage areas ranging from 1.49 to 48.9 square miles were used to evaluate selected seasonal flow characteristics. Of the 16 stations, only one station had an impervious area greater than 12 percent so these stations were basically rural watersheds. Using daily flow data at 16 gaging stations, the mean flows for the March to June period and September to November period were determined for each year. A Pearson Type III frequency distribution was fit to the logarithms of these annual flows for each time of the year. The following flow statistics were analyzed:

- March to June mean flow that has a 90-percent annual chance of exceedance,
- March to June mean flow that has a 10-percent annual chance of exceedance,
- September to November mean flow that has a 90-percent annual chance of exceedance, and
- September to November mean flow that has a 10-percent annual chance of exceedance.

Regression equations based only on drainage area were developed for estimating the seasonal flow characteristics described above and are provided in Attachment 2 for informational purposes. Because the regression equations were only based on 16 stations that were primarily rural stations, these equations have less applicability than Equations (5-1)-(5-4) described earlier.

5.6 FUTURE TOPICS FOR RESEARCH

Regression equations were developed for estimating the 2- and 10-year 90- and 120-day duration discharges for small watersheds in Maryland where the drainage areas were less than 10 square miles. The watershed characteristics used in the analysis were obtained from previous regression analyses for flood discharges. These watershed characteristics are more appropriate for predicting flood runoff rather than low flows. The accuracy of Equations 1-4 could be improved by developing explanatory variables that are based on geological or groundwater characteristics. For example, groundwater related variables like yields from wells or depth to groundwater would likely be statistically significant in estimating low flows like the 2-year 120-day discharge. Development of geologic and groundwater related variables was beyond the scope of the current project.

Future research should be conducted to estimate geologically-based explanatory variables that are more appropriate for estimating low flows and develop new regression equations. The USGS has performed several low flow regional analyses over the years and USGS reports that are documented at <http://water.usgs.gov/osw/programs/nss/pubs.html> were reviewed to determine geologically-based explanatory variables that were shown to be statistically significant in estimating low flows. The low-flow reports at the above cited USGS web site are those for which the low-flow regression equations have been incorporated into the USGS National Stream Statistics (NSS) Program (Ries, 2007).

For low-flow studies in Alabama and Tennessee, Bingham (1982, 1985) developed a streamflow recession index that was indicative of the rate of streamflow recession during base (low) flow and estimated in days per log cycle for discharge depletion (see Figure 5-6). The streamflow recession index is controlled by hydraulic characteristics of the aquifers and is highly correlated with low flows in the stream. Bingham (1982, 1985) determined the streamflow recession index at several gaging stations and then mapped this variable using a geologic map. The gaging station data were used to develop the regression equations, and the mapped value of the stream recession index was then used to estimate low flows at ungaged sites.

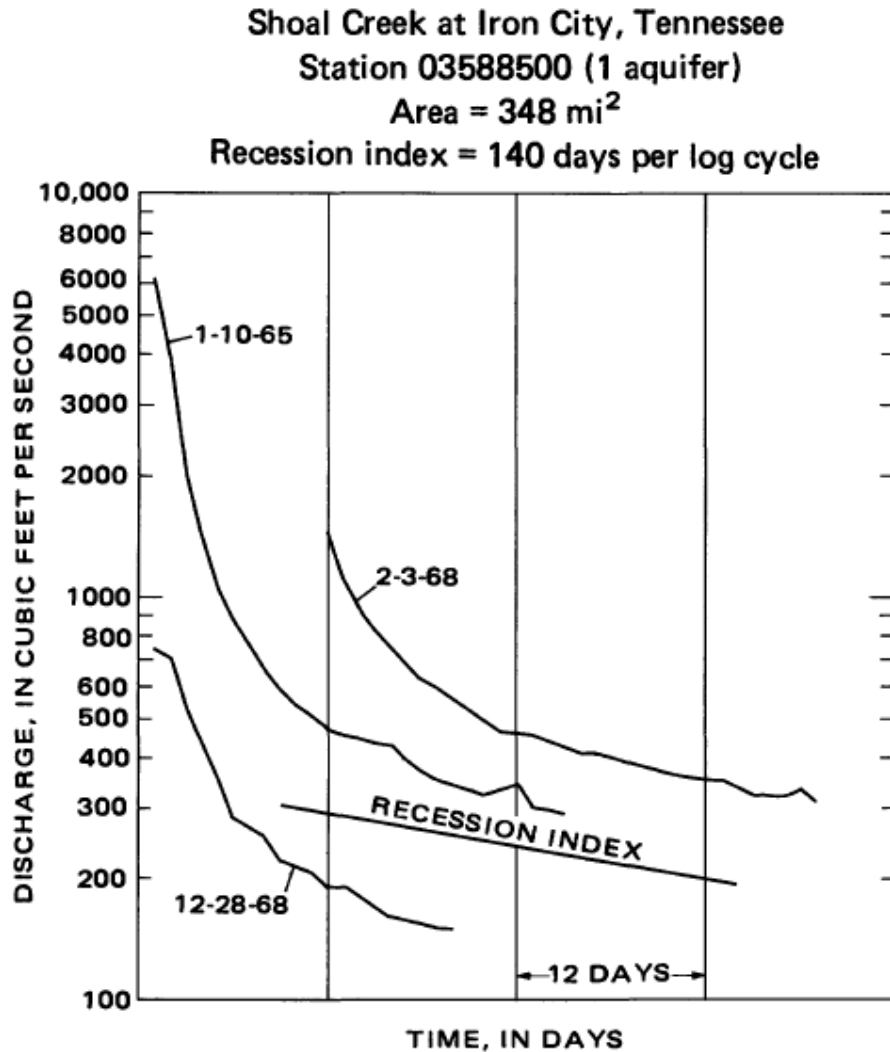


Figure 5-6: Schematic of determining the streamflow recession index

The streamflow recession index was found to be statistically significant for estimating low flows in other states as well. Funkhouser and others (2008) determined that the streamflow (baseflow) recession index was statistically significant for estimating low flows in Arkansas. Curran and others (2012) determined that the streamflow (baseflow) recession index was statistically significant for estimating low flows in Washington. For these studies, the streamflow recession index was mapped based on values estimated at gaging stations and using geologic maps.

In addition to the streamflow recession index, the following geologically-based explanatory variables were found to be statistically significant in at least one hydrologic region in a given state:

- In Indiana, the ratio of the 20-percent flow duration value to the 90-percent flow duration value that was mapped using gaging station data and surficial geology maps (Arihood and Glatfelter, 1991),
- In Pennsylvania, stream density in sum of stream miles in the watershed divided by drainage area, soil thickness in depth to bedrock (in feet), percent glaciation of the watershed, and percent carbonate rock (Stuckey, 2006),
- In Ohio, an index of relative infiltration determined from by the fraction of the watershed covered by eight different soil groups, NOT related to A, B, C or D hydrologic soils (Koltun and Schwartz, 1987),
- In Idaho, percent of surficial volcanic rock (Hortness, 2006), and
- In Kentucky, streamflow variability index estimated as the standard deviation of the base 10 logarithms of 19 flow duration values from 5- to 95-percent (Martin and Arihood, 2010).

For the current analysis, the annual minimum 90- and 120-consecutive day discharges were used in developing the regression equations. The annual minimum n-day discharges normally occur in late summer and early fall, which roughly corresponds to the period of trout spawning and migration in Maryland streams.

Another topic for future research is to develop regression equations for seasonal flow characteristics that are consistent with fish spawning and migration in Maryland streams. During the course of this project, the use of seasonal flow characteristics was investigated using data for 16 gaging stations with drainage areas ranging from 1.49 to 48.9 square miles. The regression equations from this analysis are given in Attachment 2. Further research into seasonal flow analysis is warranted.

5.7 SUMMARY

Daily flow data for 50 gaging stations with drainage areas less than 10 square miles and daily flow records in excess of 10 years were used to develop regression equations for estimating 2- and 10-year 90- and 120-consecutive day discharges. The USACE HEC-SSP program (USACE, 2010) was used to define the T-year N-day discharges at the 50 gaging stations by fitting a Pearson Type III frequency distribution to the logarithms of the annual minimum 90- and 120-day discharges. Drainage area, impervious area, and land slope were determined to be the most statistically significant watershed characteristics. The watershed characteristics used in defining Equations 1-4 are more indicative of flood flows and improvements in the regression equations could be realized through further research on:

- Development of geologic or groundwater characteristics that should be highly correlated with low flows, and
- Investigation into seasonal flow characteristics that might be more indicative of fish spawning and migration in Maryland streams.

There were two gaging stations where the 10-year 90- and 120-day discharges were zero. Since all data were transformed to logarithms for the linear regression analysis, a constant of 0.1 cfs was added to all 10-year discharges. Therefore, a constant of 0.1 cfs should be subtracted from the 10-year estimates in Equations 2 and 4. If the estimate becomes negative, then use zero as the estimated value.

The 2- and 10-year discharges for durations of 90- and 120-days (Equations 1-4) should be meaningful in designing culverts for fish passage in Maryland. The recommendation is to continue research in developing regression equations for low flows in Maryland.

5.8 ATTACHMENT 1. SUMMARY OF DATA USED IN THE REGRESSION ANALYSIS

Attachment 1 summarizes data for the 50 gaging stations used in the regression analysis. The three most statistically significant watershed characteristics in the regression analysis were drainage area, impervious area and land slope. The data in Attachment 1 include:

Station name

Station number

Drainage area, in square miles

Impervious area, in percent of drainage area

Land slope, in feet per foot, slope of the watershed, not the main channel slope

2-year 90-day low flow, in cubic feet per second (cfs)

10-year 90-day low flow, in cubic feet per second (cfs)

2-year 120-day low flow, in cubic feet per second (cfs)

10-year 120-day low flow, in cubic feet per second (cfs)

| Station name | Station Number | Drainage area (mi ²) | Imper-vious area (%) | Land Slope (ft/ft) | 90 day | | 120 day | |
|-------------------------------------|----------------|----------------------------------|----------------------|--------------------|--------|-----|---------|-----|
| | | | | | Q2 | Q10 | Q2 | Q10 |
| Baisman Run at Broadmoor | 01484713 | 1.49 | 8.4 | 0.108 | 0.8 | 0.3 | 0.8 | 0.3 |
| Basin Run at Liberty Grove | 01486000 | 5.08 | 2.9 | 0.06 | 2.5 | 1.5 | 3.1 | 1.8 |
| Beaverdam Run at Matthews | 01489000 | 5.49 | 0.6 | 0.0069 | 0.4 | 0.2 | 0.7 | 0.3 |
| Beetree Run at Bentley Springs | 01492000 | 9.66 | 4.8 | 0.098 | 8.3 | 4.7 | 8.9 | 5.1 |
| Birch Branch at Showell | 01492500 | 5.77 | 1.7 | 0.005 | 1.2 | 0.4 | 1.7 | 0.6 |
| Brien Run at Stemmers Run | 01496200 | 1.95 | 36.8 | 0.036 | 0.8 | 0.5 | 1 | 0.7 |
| Bynum Creek at Bel Air | 01579000 | 8.79 | 12.9 | 0.048 | 3.8 | 1.6 | 4.9 | 2.1 |
| Cocktown Creek near Huntington | 01581500 | 3.9 | 8.7 | 0.086 | 1 | 0.4 | 1.2 | 0.6 |
| Cranberry Branch nr Westminister | 01581752 | 3.26 | 4.2 | 0.081 | 1.3 | 0.5 | 1.5 | 0.6 |
| Dead Run at Franklinton | 01581830 | 5.52 | 41.1 | 0.047 | 2.8 | 1.3 | 3.6 | 1.7 |
| East Branch Herbert Run at Arbutus | 01581940 | 2.47 | 33.8 | 0.054 | 1.5 | 1 | 1.8 | 1.2 |
| Faulkner Branch at Federalsburg | 01581960 | 7.69 | 3 | 0.0104 | 2.1 | 1.1 | 2.6 | 1.2 |
| Fishing Creek near Lewistown | 01583000 | 7.3 | 0 | 0.141 | 2.3 | 1.4 | 2.7 | 1.5 |
| Grave Run near Beckleysville | 01583570 | 7.56 | 5.4 | 0.097 | 5.2 | 2.6 | 5.6 | 2.9 |
| Gwynns Falls at Glyndon | 01583580 | 0.308 | 42 | 0.026 | 0.1 | 0 | 0.1 | 0 |
| Gwynns Falls near Delight | 01583979 | 4.09 | 37.7 | 0.049 | 2.5 | 1.5 | 3 | 1.8 |
| Gwynns Falls near Owings Mill | 01584050 | 4.89 | 14.6 | 0.0559 | 2.7 | 1.6 | 3 | 1.8 |
| Honeygo Run at White Marsh | 01585090 | 2.44 | 22.5 | 0.054 | 1.2 | 0.5 | 1.5 | 0.6 |
| Hunting Creek near Foxville | 01585095 | 2.19 | 0 | 0.149 | 0.3 | 0.1 | 0.4 | 0.1 |
| Hunting Creek Tributary nr Foxville | 01585100 | 3.91 | 1.2 | 0.1188 | 0.8 | 0.4 | 1.1 | 0.6 |
| Killpeck Creek at Huntersville | 01585104 | 3.26 | 4.1 | 0.053 | 1.5 | 0.7 | 1.6 | 0.8 |
| Laurel Run at Dobbin Road nr Wilson | 01585200 | 8.23 | 1.1 | 0.155 | 6.3 | 3 | 7.9 | 3.5 |
| Little Catoctin Creek at Harmony | 01585225 | 8.76 | 0.8 | 0.152 | 2.2 | 1.1 | 3 | 1.4 |
| Little Falls Branch near Bethesda | 01585230 | 4.09 | 32.4 | 0.0517 | 1.4 | 0.7 | 1.7 | 1 |
| Long Green Creek at Gln Arm | 01585300 | 9.31 | 5.7 | 0.065 | 5 | 2.7 | 5.6 | 2.9 |
| Manokin Branch near Princess Anne | 01585400 | 5.02 | 1.5 | 0.00349 | 0.7 | 0.2 | 1 | 0.2 |
| McMillian Fork near Fort Pendleton | 01585500 | 2.36 | 1.2 | 0.13 | 0.4 | 0.1 | 0.6 | 0.1 |
| Minebank Run near Glen Arm | 01589100 | 2.095 | 40.2 | 0.091 | 1.5 | 0.8 | 1.7 | 1 |
| Mingo Branch near Hereford | 01589180 | 0.765 | 2.5 | 0.105 | 0.5 | 0.1 | 0.5 | 0.2 |
| Moores Run at Radecke Ave at Balt | 01589197 | 3.5 | 45.4 | 0.045 | 1.7 | 1.1 | 2.1 | 1.3 |
| Moores Run Trib at Baltimore | 01589200 | 0.143 | 41.1 | 0.051 | 0.1 | 0.1 | 0.1 | 0.1 |

| Station name | Station Number | Drainage area (mi ²) | Imper-vious area (%) | Land Slope (ft/ft) | 90 day | | 120 day | |
|--------------------------------------|----------------|----------------------------------|----------------------|--------------------|--------|-----|---------|-----|
| | | | | | Q2 | Q10 | Q2 | Q10 |
| NB Rock Creek near Norbeck | 01589330 | 9.68 | 9.9 | 0.0533 | 3.9 | 1.8 | 4.8 | 2.2 |
| NF Whitemarsh Run nr White Marsh | 01589500 | 1.36 | 42.9 | 0.049 | 0.7 | 0.4 | 0.9 | 0.5 |
| North Fork Sand Run near Wilson | 01589795 | 1.91 | 0.5 | 0.144 | 0.9 | 0.3 | 1.1 | 0.4 |
| North River near Annapolis | 01590000 | 8.9 | 2.7 | 0.082 | 5.9 | 3.6 | 6.5 | 4.1 |
| Bacon Ridge Branch at Chesterfield | 01590500 | 7 | 1.5 | 0.104 | 4.8 | 2.4 | 5.2 | 2.7 |
| Plumtree Run near Bel Air | 01594710 | 2.47 | 42.9 | 0.048 | 2 | 1.1 | 2.3 | 1.4 |
| Pond Branch at Oregon Ridge | 01594800 | 0.131 | 0 | 0.101 | 0.1 | 0 | 0.1 | 0 |
| Principio Creek nr Principio Furnace | 01594930 | 9 | 1 | 0.0639 | 4.5 | 2.7 | 5.2 | 3 |
| Sallie Harris Creek near Carmichael | 01594936 | 7.49 | 0.1 | 0.009 | 4 | 2.4 | 4.4 | 2.6 |
| Sawmill Creek at Glen Burnie, MD | 01594950 | 4.9 | 23.5 | 0.026 | 3.7 | 0.5 | 3.7 | 0.7 |
| SF Jabez Branch at Millersville | 01637000 | 1 | 16.8 | 0.04 | 0.3 | 0.2 | 0.3 | 0.2 |
| Slade Run near Glyndon | 01640500 | 2.05 | 1.2 | 0.088 | 1.2 | 0.6 | 1.3 | 0.7 |
| St Leonard Creek near St Leonard | 01640965 | 6.8 | 0.3 | 0.088 | 2.8 | 0.9 | 3.3 | 1.2 |
| Stemmers Run at Rossville | 01640970 | 4.52 | 25.3 | 0.064 | 2 | 1 | 2.7 | 1.4 |
| Watts Branch at Rockville | 01641500 | 3.7 | 26.2 | 0.056 | 1.6 | 0.9 | 1.9 | 1.1 |
| WB Herring Run at Idlewylde | 01645200 | 2.31 | 42.1 | 0.059 | 1.2 | 0.7 | 1.4 | 0.9 |
| White Marsh Run at White Marsh | 01646550 | 7.56 | 37.7 | 0.061 | 1.7 | 2.4 | 2 | 2.8 |
| White Marsh Run near Fullerton | 01647720 | 2.58 | 44 | 0.068 | 4.2 | 0.8 | 5 | 0.9 |

5.9 ATTACHMENT 2. ANALYSIS OF SEASONAL FLOW CHARACTERISTICS

Based on interaction with fish biologists with the Maryland Department of Natural Resources and the University of Maryland, it was determined that fish migration in Maryland is prevalent in the Spring during the March to June time period (most species) and in the Fall during the September to November time period (trout). Flows during times of fish migration may be useful flow characteristics to analyze. Data for 16 gaging stations with drainage areas ranging from 1.49 to 48.9 square miles were used to evaluate selected seasonal flow characteristics. Of the 16 stations, only one station had an impervious area greater than 12 percent so these stations were basically rural watersheds.

Using daily flow data at 16 gaging stations, the mean flows for the March to June period and September to November period were determined for each year. A Pearson Type III frequency distribution was fit to the logarithms of these annual flows for each time of the year. The following flow statistics were summarized:

- March to June mean flow that has a 90-percent annual chance of exceedance,
- March to June mean flow that has a 10-percent annual chance of exceedance,
- September to November mean flow that has a 90-percent annual chance of exceedance, and
- September to November mean flow that has a 10-percent annual chance of exceedance.

5.9.1 March to June

The March to June mean flows with a 90- and 10-percent annual chance of exceedance are plotted in Figure 5-7 versus drainage area. The regression equations based on just drainage area in Figure 5-7 could be used to estimate the March-June mean flow with 90- and 10-percent chance exceedance. The equations for the March-June mean flows, based on only drainage area (DA) in square miles, are as follows:

$$\text{March-June } Q_{90\%} = 0.5993 \text{ DA}^{1.1038} \quad (5-5)$$

$$\text{March-June } Q_{10\%} = 1.9281 \text{ DA}^{1.0512} \quad (5-6)$$

The relation of the March to June mean flows is reasonably well described with just drainage area with Rsquare values of 0.9613 for the 10-percent annual chance exceedance flow and 0.9088 for the 90-percent annual chance exceedance flows. Both trend lines in Figure 5-7 have slopes slightly larger than 1.0, implying the discharges are directly proportional to drainage area. These flows correspond to the high fish passage and low fish passage discharges that are exceeded 10- and 90-percent of the time, respectively, during fish migration in the March to June time period as defined by Federal Highway Administration (FHWA) in HEC 26.

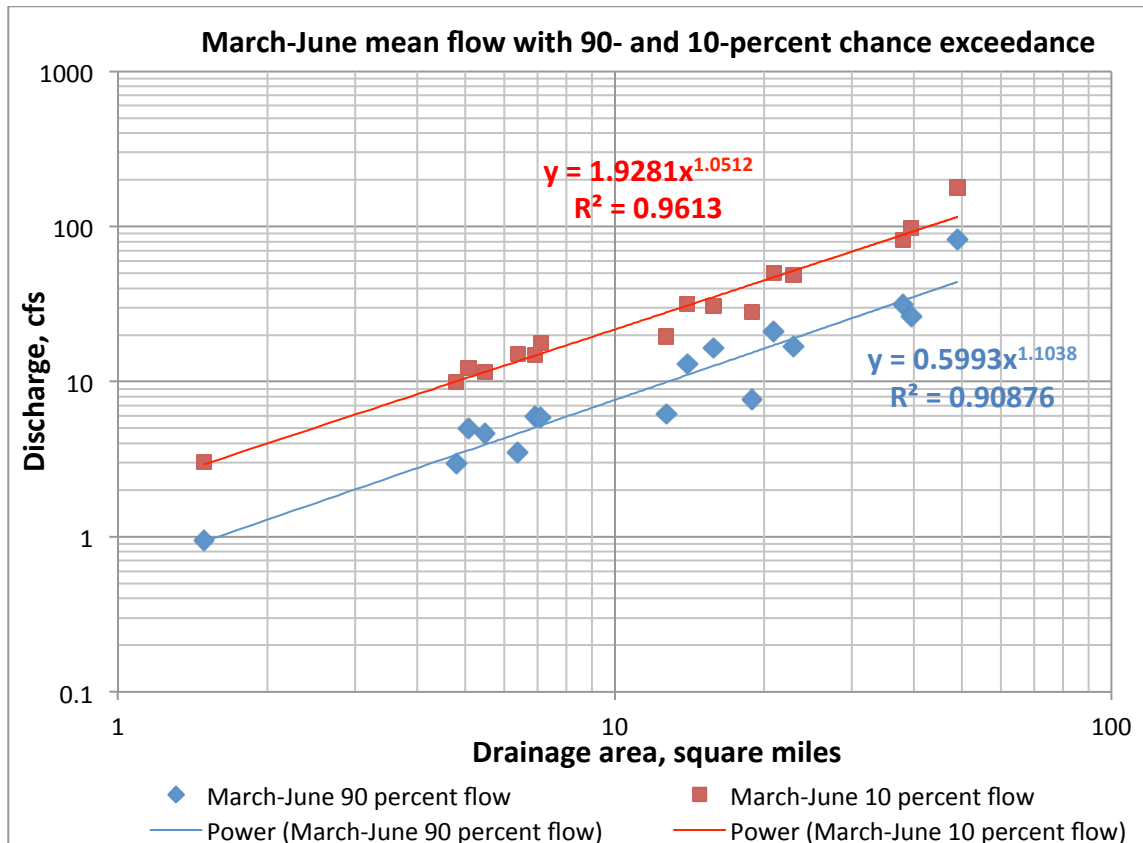


Figure 5-7: The March-June mean flow with 90- and 10-percent annual chance of exceedance plotted versus drainage area

5.9.2 September to November

The September to November mean flows with 90- and 10-percent annual chance of exceedance are plotted in Figure 5-8 versus drainage area. The regression equations based on just drainage area in Figure 5-8 could be used to estimate the September to November mean flow with 90- and 10-percent chance exceedance. The equations for the September-November mean flows, based on only drainage area (DA) in square miles, are as follows:

$$\text{September-November } Q_{90\%} = 0.223 \text{ DA}^{1.0621} \quad (5-7)$$

$$\text{September-November } Q_{10\%} = 1.464 \text{ DA}^{1.0265} \quad (5-8)$$

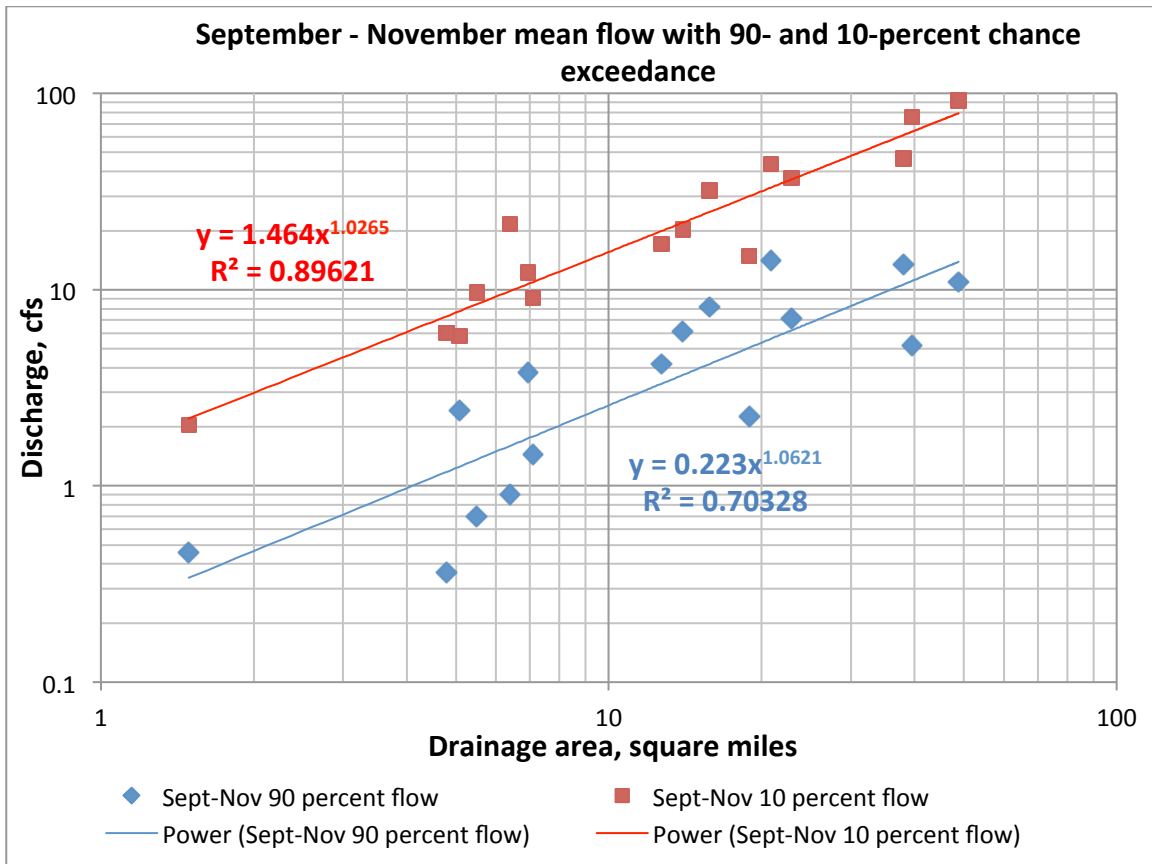


Figure 5-8: The September-November mean flow with 90- and 10-percent annual chance of exceedance plotted versus drainage area

The relation of the September to November mean flows is reasonably well described with just drainage area for the 10-percent annual chance exceedance flow with an R-square value of 0.8962. The 90-percent annual chance exceedance flow is not as well defined with an R-square value of 0.7033. The lower flows have more variability and are not as accurately estimated using only drainage area. Both trend lines in Figure 5-8 have slopes slightly larger than 1.0 implying the discharges are directly proportional to drainage area. These flows correspond to the high fish passage and low fish passage discharges that are exceeded 10- and 90-percent of the time, respectively, during fish migration in the September to November time period as defined by Federal Highway Administration (FHWA) in HEC 26.

Blank page inserted to preserve left-right pagination format.

CHAPTER 6

6 Estimation of Discharges in Tidal Reaches

6.1 INTRODUCTION

Peak flows at tidal bridges on coastal streams in Maryland normally occur as a result of a combination of the following two elements of a hurricane or tropical storm event:

Storm surge hydrograph: Storm surge is the rising of the sea level due to the high winds, low atmospheric pressure and high waves associated with a hurricane or tropical storm. For design purposes, it can be characterized by a cosine curve with a high elevation as determined by Flood Insurance Studies of FEMA, a low elevation as determined by studies of the Hydrology Panel and a tidal period of approximately 24 hours. The difference in elevations from high elevation to low elevation is defined as the range of the storm surge, and the average of these two elevations is the mean storm surge elevation. The amplitude of the storm surge is equal to one-half the range. An example storm surge hydrograph for the Baltimore, MD tide station 8574680 for Hurricane Isabel (September 19, 2003) is shown in Figure 6.1. The mean storm surge elevation and tidal period is also illustrated in Figure 6.1. The peak storm surge elevation for Hurricane Isabel was 7.31 feet (NAVD88), the peak of record at this station in 113 years of record, and slightly greater than a 100-year event.

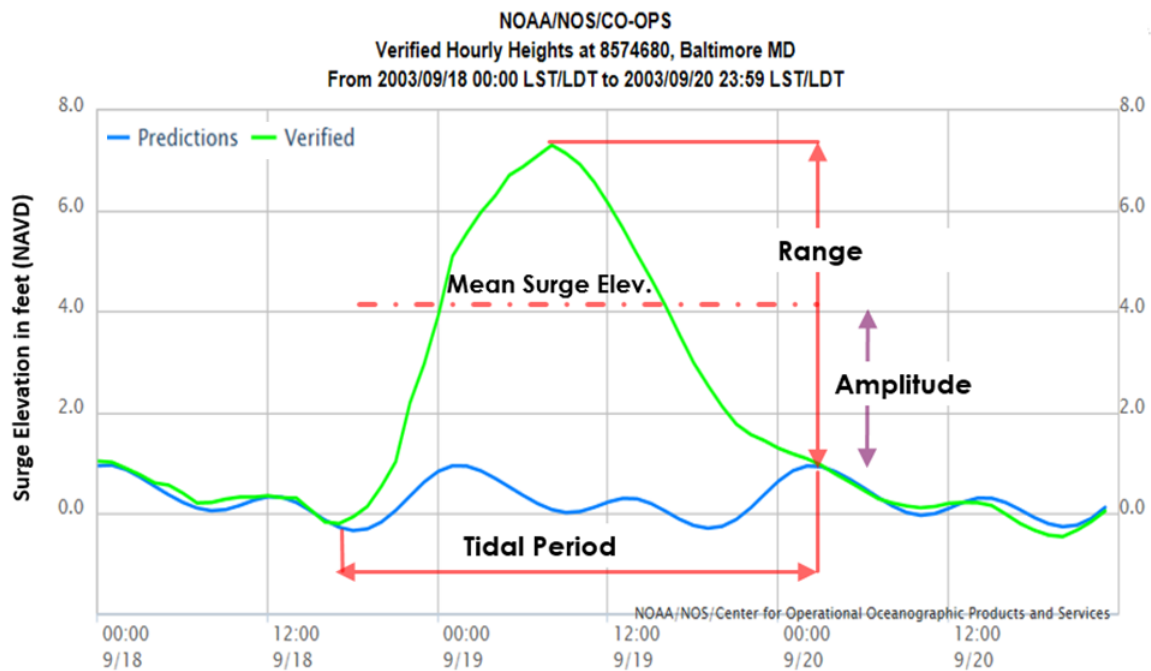


Figure 6-1: An example storm surge hydrograph for Baltimore, MD for September 18-20, 2003

An observed storm surge hydrograph for Hurricane Isabel in September 2003 (Figure 6.1) illustrates the characteristics of the surge hydrograph. For analyses at a bridge site, a T-year storm surge hydrograph is used for the analysis where the peak storm surge is the T-year Stillwater elevation from a FEMA Flood Insurance Study or similar studies. The tidal period in Figure 6.1 for the Hurricane Isabel event was about 30 hours and this varies by storm event. For analyses at tidal bridges, a 24-hour tidal period is assumed. The low point after the storm surge is the point at which the storm surge recedes to the normal tidal cycle. The low point elevation of the Hurricane Isabel event in Figure 6.1 was about 1.0 feet (NAVD88). An analysis of several storm surge hydrographs indicated that this is typical for major storm surge events in the Chesapeake Bay. The 1.0 ft elevation (NAVD88) is recommended as a tailwater elevation in scour computations where the tailwater elevation is influenced by the Chesapeake Bay.

Riverine hydrograph: The riverine hydrograph occurs as a result of the rainfall occurring during the hurricane or tropical storm that is falling on the drainage area of the tidal stream above the crossing of the structure under consideration. An example of an observed riverine hydrograph is given in Figure 6.2 for the Choptank River near Greensboro, MD (station 01491000) where the drainage area is 113.7 square miles. The hydrograph in Figure 6.2 represents the flooding for September 14-22, 1999 that occurred during Hurricane Floyd and the peak discharge of 6,420 cfs is a 20-year event (third highest flood in a 67-year record). The storm surge elevation during Hurricane Floyd was less than a 2-year event. The time base of the hydrograph is a function of the basin lagtime/time of concentration for the watershed.

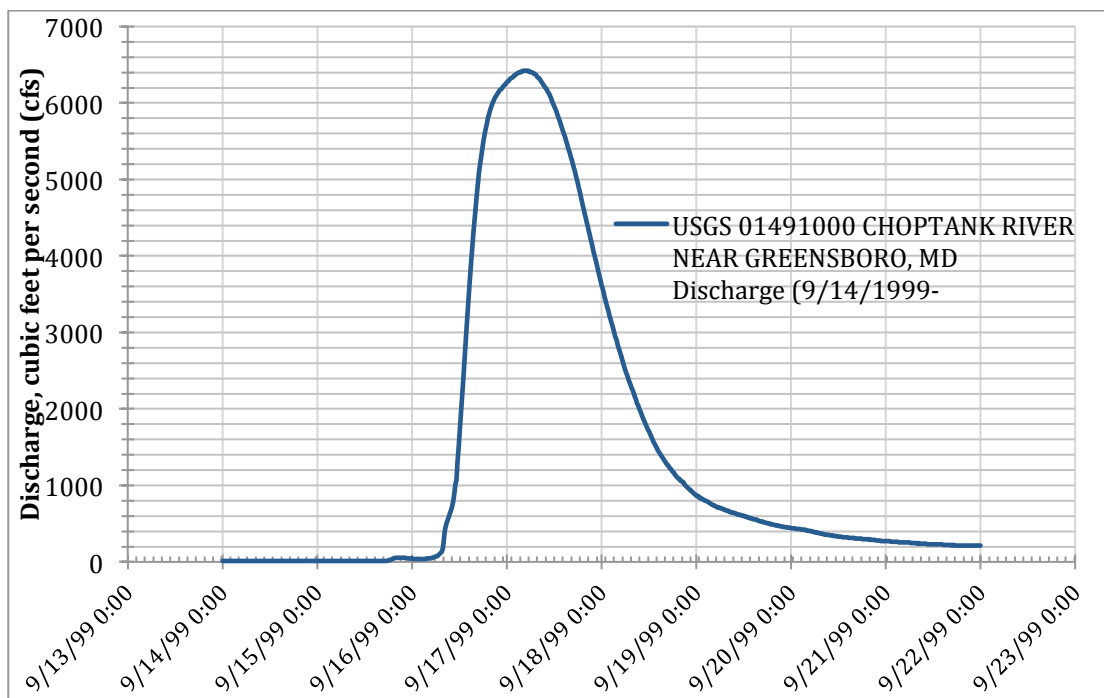


Figure 6-2. An example riverine hydrograph for the Choptank River near Greensboro, MD (station 01491000) for September 14-22, 1999

Many factors enter in to the contribution of the storm surge and the riverine hydrograph and the peak flow through a structure for a given storm. The combined peak flow is needed to design the bridge opening and to evaluate scour. Determination of these flows is not subject to a rigorous analysis. Rather, the following guidance serves to provide for a conservative, yet reasonable, method for estimating peak flows at tidal bridges.

6.2 TIMING OF THE STORM SURGE AND RIVERINE HYDROGRAPHS

One important factor in determining the design discharges at tidal-affected bridges is the timing of the storm surge and riverine hydrographs. There are four long-term tide stations in Maryland and they are in the Chesapeake Bay (Baltimore, Annapolis, Cambridge and Solomons Island). A brief investigation was conducted with respect to the timing of peak storm surge elevations and peak riverine discharges and the frequency of those events. The long-term tide stations were utilized because sufficient data are available for determining the frequency (recurrence interval) of the events. Attachment 1 summarizes the timing and frequency of several surge and riverine flood events. There are a few constraints or data limitations in determining the relative timing of the storm surge and riverine flooding events:

- Concurrent data for flooding events need to be available for the tide and streamflow gaging stations and these data are not always available.
- The four long-term tide stations in Maryland are in the Chesapeake Bay and all stations experience the same storm surge events; therefore a limited number of significant storm surge events are available for evaluation.
- The only storm surge event that approximated a 100-year event was Hurricane Isabel in September 19, 2003. The riverine events associated with Hurricane Isabel were about 2-year events. A significant rainfall-runoff event occurred four days after the storm surge event.
- Riverine hydrographs for 15-minute data or less are only available in electronic format for Maryland streams since October 1990. Before 1990, only annual maximum peak discharges and the day (date) of the peak discharge are available which is not very helpful for evaluating the timing of peaks for the smaller streams.
- For events prior to 1990, the dates of the annual maximum peak discharge can be compared to the timing of the storm surge.
- Riverine gaging stations are generally located many miles upstream of the Chesapeake Bay to avoid the effects of tidal backwater and this complicates the evaluation of the timing of the peaks at bridges in tidal areas.

For evaluating the timing of the peak storm surge and peak riverine discharge, the candidate streamflow gaging stations were those that drained into the estuary of the tide station or an estuary close to the tide station. The drainage areas for the streamflow gaging stations varied from 1 square mile to 348.9 square miles.

The following observations resulted from the analysis described in Attachment 1:

- The major storm surge events generally do not produce major riverine peak discharges. That implies that significant storm surge events do NOT generally occur at the same time as significant riverine floods.
- Most of the annual maximum peak discharges occurred when the storm surges were low or during a time of year when hurricanes and tropical storms do not occur.
- For the larger streams (> 100 square miles) in the coastal plain regions, the riverine peaks occur long after the peak storm surge. In addition, the gaging stations are far upstream from the tide stations and have long times of concentration implying the peak riverine discharges occur much later than the peak storm surges at the tide stations.
- For the smaller streams (< 10 square miles) in the coastal plain regions, the timing of the peak storm surges and peak riverine discharges were much closer in timing with peaks sometimes occurring on the same day.
- During major storm surge events, watersheds greater than 100 square miles generally experienced events with recurrence intervals of 2 years or less. Conversely, during major riverine events, the frequency of the storm surge events were on the order of a 2-year event.
- During major storm surge events, watersheds less than 10 square miles experienced riverine events with recurrence intervals ranging from 1.25 to 20 years.

6.3 APPROACH FOR ESTIMATING RIVERINE T-YEAR HYDROGRAPHS FOR WATERSHEDS GREATER THAN 300 SQUARE MILES

As described in Section 4.2, the WinTR-20 model is recommended for estimating riverine hydrographs for watersheds less than 300 square miles. The procedures for applying the WinTR-20 model are described in detail in earlier chapters of this report. For watersheds with drainage areas in excess of 300 square miles, a T-year riverine hydrograph can be estimated using the USGS dimensionless hydrographs described by Dillow (1998). “The USGS dimensionless hydrographs for three hydrologic regions (Appalachian Plateau (AP), Piedmont (P), and Coastal Plain (CP)) in Maryland are shown in Figure 6-3 [from Dillow (1998)] where the ordinate is the discharge divided by peak discharge and the abscissa is time divided by lagtime. Also shown in Figure 6-3 for comparison purposes are the SCS dimensionless hydrograph and the Georgia dimensionless hydrograph that is used in the USGS National Streamflow Statistics Program for flood hydrograph estimation. The lagtime as used by USGS is the time from the centroid of rainfall excess to the centroid of the runoff hydrograph. This differs from the NRCS lag time that is the time from the centroid of rainfall excess to the peak discharge. The USGS basin lagtime is, on average, about 95 percent of the time of

concentration while the NRCS lag time is defined as 60 percent of the time of concentration.

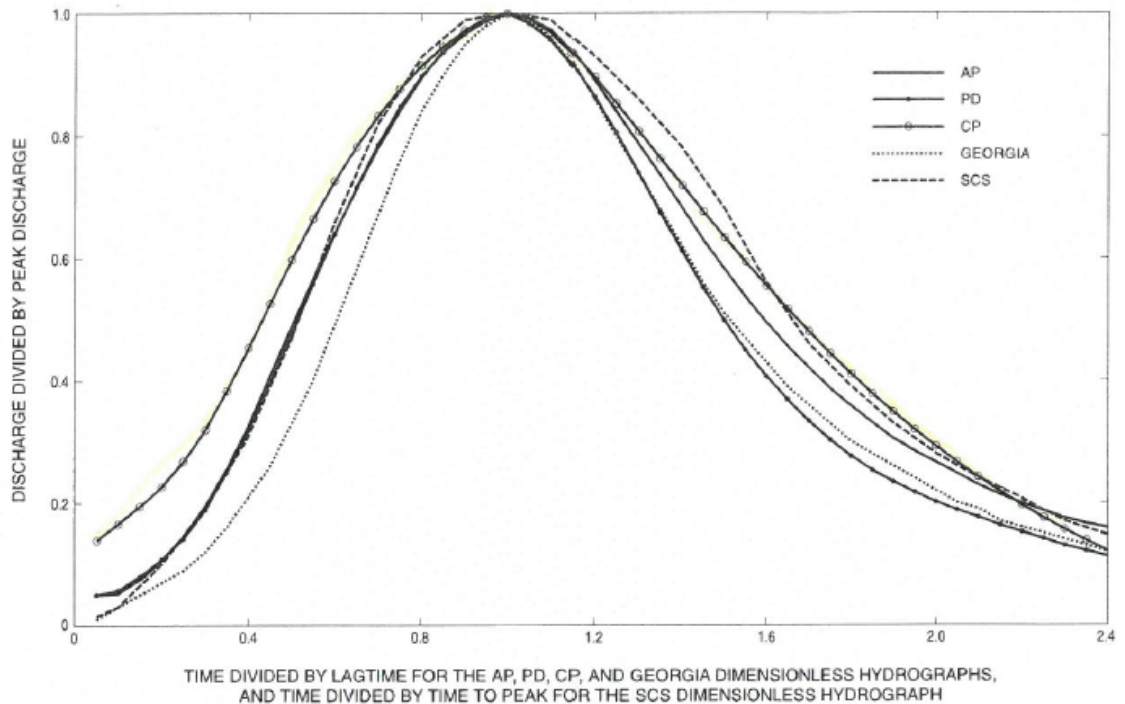


Figure 6-3: Dimensionless hydrographs for the Appalachian Plateau (AP), Piedmont (PD), and Coastal Plain (CP) Regions in Maryland and the Georgia and SCS dimensionless hydrographs with peaks aligned [from Dillow (1998)]

The USGS dimensionless hydrographs for the three hydrologic regions are defined in tables in Dillow (1998). The estimation of a T-year hydrograph involves multiplying the ordinate by the T-year peak discharge and the abscissa by the basin lagtime and can be easily applied in a spreadsheet. The T-year peak discharge is estimated using the Fixed Region regression equations in Appendix 3 of this report and Dillow (1998) provides a regression equation for estimating the basin lagtime. The CP dimensionless hydrograph is mostly applicable for tidal streams because the tidal bridges are located in either the Western or Eastern Coastal Plain Regions.

An example of estimating the 100-year flood hydrograph for the Choptank River (station 01491000) using the CP dimensionless hydrograph is illustrated in Figure 6.4. The 100-year peak discharge of 10,400 cfs was estimated from a Bulletin 17B frequency analysis using the observed annual peak flows through 2011. A basin lagtime of 31.6 hours was estimated from observed rainfall-runoff events (Dillow, 1998). In order to evaluate the dimensionless hydrograph approach, the ordinates of the September 1999 flood hydrograph for Hurricane Floyd (Figure 6-2) were increased to match a peak discharge of 10,400 cfs to obtain an independent estimate of the 100-year flood hydrograph at the gaging station. The comparison in Figure 6-4 indicates the USGS dimensionless

hydrograph approach provides reasonable estimates of the T-year riverine hydrographs when compared to scaling up observed flood hydrographs. The USGS dimensionless hydrograph provides a quick approach for estimating T-year riverine hydrographs for large watersheds upstream of tidal bridges in Maryland.

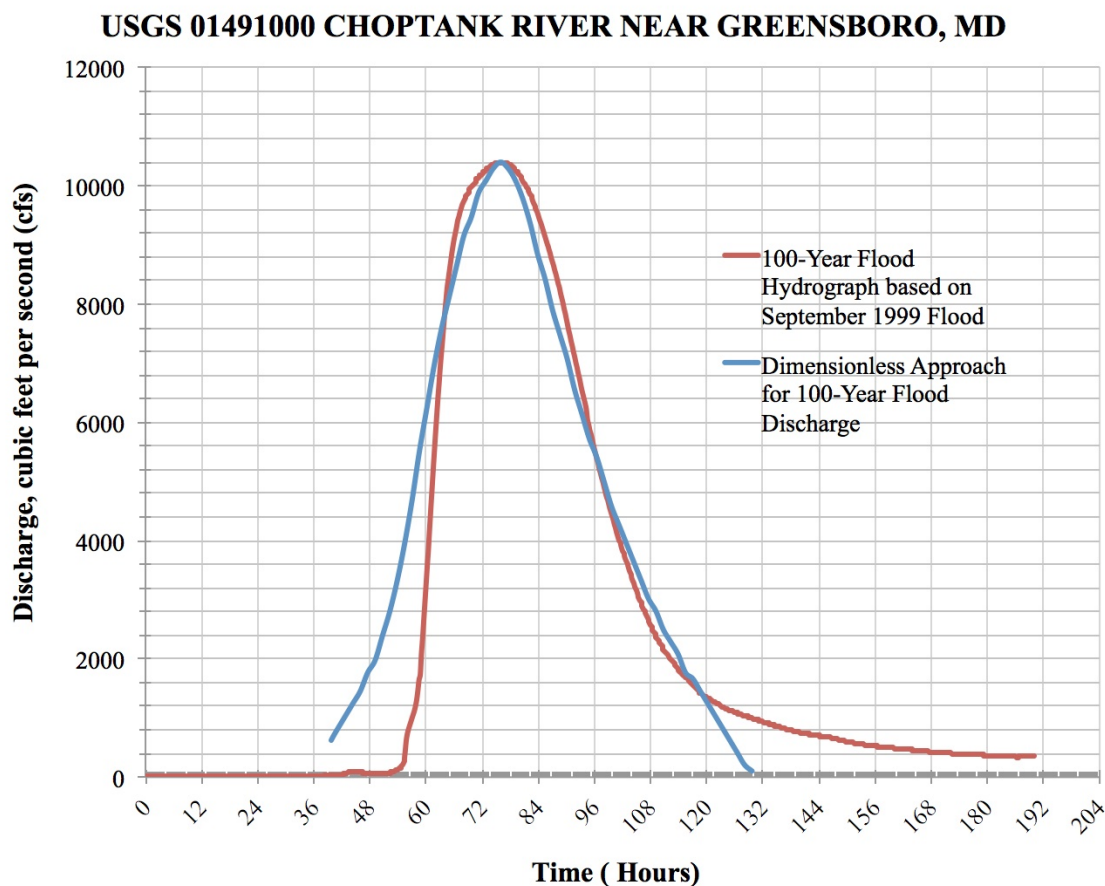


Figure 6-4: Comparison of 100-year hydrographs for the Choptank River near Greensboro, MD (station 014910000)

6.4 APPROACH FOR ESTIMATING MAXIMUM STORM SURGE DISCHARGE

The storm surge flow rate through a channel that is relatively unconstricted by a bridge opening depends on the rate at which the bay side of the bridge is filled or emptied since the head differential through the bridge is expected to be small. The maximum discharge occurs at an elevation halfway between the high and low storm surge elevation. Equation 6.1 can be used to estimate this maximum discharge:

$$Q_{\max} = 3.14 (A_s * H) / T \tag{6-1}$$

where

Q_{\max} = maximum discharge in a tidal cycle in cubic feet per second,
As = surface area of the tidal basin at mean tide in square feet,
H = difference in elevation between high and low storm surge levels in feet, and
T = tidal period (24 hours) in seconds.

Equation 6-1 is used to estimate the maximum storm surge peak discharge that is combined with the riverine peak flow to estimate the total flow through the bridge opening. Using the data in Figure 6-1 to illustrate the use of Equation 6-1, the high elevation is the peak of the storm surge at 7.31 feet, the low elevation is about 1.0 foot, H is 6.31 feet and the mean tide is 4.16 feet. The surface area of the tidal basin upstream of the bridge at elevation 4.16 feet is the remaining variable to be determined. The surface area of the tidal basin upstream of the bridge is estimated using the best available topographic data.

6.5 MODELS FOR EVALUATING TIDAL FLOW

SHA uses two models for estimating discharges and water surface profiles in the vicinity of tidal bridges: TIDEROUT2 Scour and HEC-RAS. A brief purpose for each model is given but the user should consult the latest user's manuals for a more complete description of these programs.

TIDEROUT2 Scour

TIDEROUT2 Scour is a flood routing program developed by SHA (2015). Its primary purpose is for estimating discharges and scour at bridges in tidal waterways. The program can be used to route riverine flows from an upland watershed down to the tidal basin and then route the combined riverine/tidal flow through the bridge and over the road if needed. A riverine hydrograph can be entered into the program or estimated for a single watershed area using the NRCS dimensionless unit hydrograph. TIDEROUT2 Scour uses information on tidal characteristics, the volume of the tidal basin upstream of the bridge and the reservoir routing method (Inflow – Outflow = Storage) to estimate a storm surge hydrograph for the bridge analysis. Recently, scour equations were incorporated into the TIDEROUT2 Scour program. Additional details on the program are provided in the TIDEROUT2 Scour program.

HEC-RAS

HEC-RAS is a hydraulic model developed by the U.S. Army Corps of Engineers (USACE) that is used to route riverine flows, estimate water surface profiles and compute bridge scour. The program implements Manning's equation in open channels, computes flow through bridges and culverts and flow over the road. SHA uses the steady state version of HEC-RAS that utilizes only peak discharges (no hydrographs). Additional details are provided on the program in the HEC-RAS User's Manual dated February 2016 (USACE, 2016).

6.6 RECOMMENDATIONS FOR COMBINING STORM SURGE AND RIVERINE DISCHARGES

The following recommendations are provided for estimating storm surge and riverine discharges at tidal bridges in Maryland. Each tidal bridge will present a different set of conditions to consider. Therefore, other approaches may be appropriate for specific tidal bridge site locations. However, approval of the Office of Structures is necessary prior to use of approaches different from the following guidance.

Tidal bridges in Maryland are located in the Eastern and Western Coastal Plain Regions. In those regions, the times of concentration for watersheds of 25 square miles are approximately 24 hours. If a watershed in one of the coastal plain regions exceeds 25 square miles, then it is likely the time of concentration is greater than 24 hours and the riverine and storm surge peaks will differ in time by at least 24 hours. The timing analysis in Attachment 1 verified that for the larger watersheds, the timing of the surge and riverine events generally differed by more than a day. However, the smaller watersheds sometimes experienced major storm surge and riverine peak discharges on the same day (within 24 hours). Therefore, different guidance is provided for analyzing watersheds less than and greater than 25 square miles.

The following assumptions are made about the coincidence of storm surge and riverine peak discharges:

- For watersheds 25 square miles or less, assume a 100-year or 500-year storm surge and a 10-year riverine peak discharge occur on the same event, and conversely, a 10-year storm surge and 100-year or 500-year riverine peak discharge occur on the same event.
- For watersheds greater than 25 square miles, assume a 100-year or 500-year storm surge and a 2-year riverine peak discharge occur on the same event, and conversely, a 2-year storm surge and 100-year or 500-year riverine peak discharge occur on the same event.

Limited data are available for gaging stations on very small tidal streams of a few square miles. For tidal bridges located close to the Chesapeake Bay for which the upstream drainage area is less than a few square miles, the same T-year event may occur on the same event. For example, the 100-year storm surge and the 100-year riverine peak discharge may occur at the same time. This is an example of a specific bridge for which the Office of Structures should be consulted.

Specific guidance is provided when using TIDEROUT2 Scour and HEC-RAS.

TIDEROUT2 Scour

Due to the lack of observed storm surge events on the order of a 100-year event, the same procedures are recommended for 100- and 500-year events because there are no data to indicate otherwise.

For watersheds of 25 square miles or less when estimating the 100-year event:

- Develop a storm surge hydrograph for the 100-year event and a 10-year riverine hydrograph and arrange the time of the riverine hydrograph to peak at the same time as the maximum surge discharge occurring at the mean surge elevation as illustrated in Figure 6-5.
- Develop a storm surge hydrograph for the 10-year event and a 100-year riverine hydrograph and arrange the time of the riverine hydrograph to peak at the same time as the maximum surge discharge occurring at the mean surge elevation as illustrated in Figure 6-5.
- Design for the worst case.

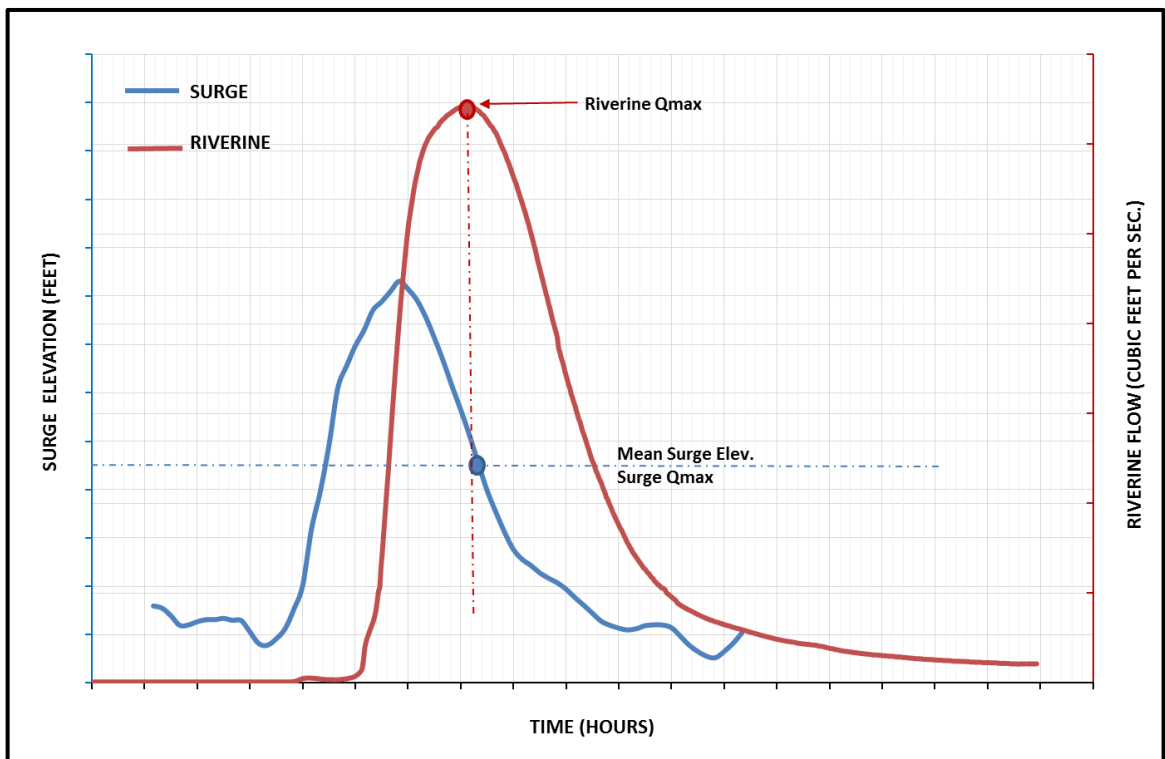


Figure 6-5: Illustration of the riverine peak discharge (Riverine Qmax) occurring at the same time as the maximum storm surge discharge (Surge Qmax)

For watersheds of 25 square miles or less when estimating the 500-year event:

- Develop a storm surge hydrograph for the 500-year event and a 10-year riverine hydrograph and arrange the time of the riverine hydrograph to peak at the same time as the maximum surge discharge occurring at the mean surge elevation as illustrated in Figure 6-5.
- Develop a storm surge hydrograph for the 10-year event and a 500-year riverine hydrograph and arrange the time of the riverine hydrograph to peak at the same time as the maximum surge discharge occurring at the mean surge elevation as illustrated in Figure 6-5.
- Design for the worst case.

For watersheds greater than 25 square miles and the 100-and 500-year events:

- Develop storm surge hydrographs for the 100-year and 500-year events and use a constant 2-year riverine discharge.
- Develop riverine hydrographs for the 100-year and 500-year events and use a 2-year storm surge hydrograph.
- Design for the worst case.

HEC-RAS

For watersheds of 25 square miles or less and 100-year event:

- Estimate the 100-year peak discharge for riverine flow; add the computed discharge for the storm surge for the 10-year event using Equation 6-1. For bridge sites impacted by the Chesapeake Bay, set the tailwater elevation at 1.0 feet (NAVD88). For bridge sites on the Potomac River or the open coast, additional analyses are warranted.
- Estimate a 10-year peak discharge for the riverine flow; add the computed discharge for the storm surge for the 100-year event using Equation 6-1. Set the tailwater elevation at the mean surge elevation for the 100-year storm surge.
- Design for the worst case.

For watersheds of 25 square miles or less and the 500-year event:

- Estimate the 500-year peak discharge for riverine flow; add the computed discharge for the storm surge for the 10-year event using Equation 6-1. For bridge sites impacted by the Chesapeake Bay, set the tailwater elevation at 1.0 feet (NAVD88). For bridge sites on the Potomac River or the open coast, additional analyses are warranted.
- Estimate a 10-year peak discharge for the riverine flow; add the computed discharge for the storm surge for the 500-year event using Equation 6-1. Set

the tailwater elevation at the mean surge elevation for the 500-year storm surge.

- Design for the worst case.

For watersheds greater than 25 square miles and the 100-year event:

- Estimate the 100-year peak discharge for riverine flow; add the computed discharge for the storm surge for the 2-year event using Equation 6-1. For bridge sites impacted by the Chesapeake Bay, set the tailwater elevation at 1.0 feet (NAVD88). For bridge sites on the Potomac River or the open coast, additional analyses are warranted.
- Estimate a 2-year peak discharge for the riverine flow; add the computed discharge for the storm surge for the 100-year event using Equation 6-1. Set the tailwater elevation at the mean surge elevation for the 100-year storm surge.
- Design for the worst case.

For watersheds greater than 25 square miles and the 500-year event:

- Estimate the 500-year peak discharge for riverine flow; add the computed discharge for the storm surge for the 2-year event using Equation 6-1. For bridge sites impacted by the Chesapeake Bay, set the tailwater elevation at 1.0 feet (NAVD88). For bridge sites on the Potomac River or the open coast, additional analyses are warranted.
- Estimate a 2-year peak discharge for the riverine flow; add the computed discharge for the storm surge for the 500-year event using Equation 6-1. Set the tailwater elevation at the mean surge elevation for the 500-year storm surge.
- Design for the worst case.

6.7 ESTIMATION OF THE 2-YEAR TIDAL ELEVATION

The 2-year tidal elevation is often needed at bridge sites to evaluate shear stress and to estimate bridge scour. There are basically two approaches for estimating the 2-year tidal elevation:

- Plot the Stillwater elevations (10-, 50-, 100-, and 500-year) from FEMA Flood Insurance Studies on graph paper and extrapolating down to the 2-year value. This approach tends to underestimate the 2-year value because the 2-year elevation is more influenced by tidal fluctuations whereas the 10- to 500-year elevations developed for Flood Insurance Studies are more storm surge oriented.

- Use frequency estimates at tide stations, for example, NOAA has frequency curves on their web site for the four long-term stations (Baltimore, Annapolis, Cambridge and Solomons Island).

A tidal frequency study conducted by FEMA in 2008 resulted in frequency analyses for several tide stations in the mid-Atlantic Region. The 2-year elevations (NAVD88) were estimated for the following stations in the Chesapeake Bay of Maryland and Virginia:

- Baltimore – 2-year elevation = 2.88 feet,
- Annapolis – 2-year elevation = 2.63 feet,
- Solomons Island – 2-year elevation = 2.46 feet,
- Lewisetta, VA – 2-year elevation = 2.65 feet.

In addition, the 2-year elevation for the Cambridge tide station from the NOAA web site is 2.7 feet. These analyses indicate that the 2-year tide elevation only varies about 0.4 feet across most of the Chesapeake Bay. Therefore, interpolation between tide stations is a reasonable approach for determining the 2-year tide elevation at SHA bridge sites.

6.8 ATTACHMENT 1. FREQUENCY AND TIMING OF RIVERINE AND STORM SURGE HYDROGRAPHS

A major issue associated with estimation of peak discharges in tidal reaches is the timing of the riverine and storm surge hydrographs. The timing and frequency of flooding were examined at streamflow and tidal stations. The objective was to find a gaging station on a stream that was draining into an estuary or near an estuary where there was a long-term tide gage.

The following tables are organized by long-term tide gages in the Chesapeake Bay: Cambridge, Solomon Islands, Baltimore and Annapolis.

6.8.1 Cambridge Tide Station

The Cambridge tide station 8571892 is on the Choptank River at Cambridge Maryland and is located just downstream of US 50 (Figure 1). Of the four long-term tide stations in the Chesapeake Bay, the Cambridge station has the shortest record from 1943 to 1950 and 1971 to 2015. Several major storm surge events in the 1950s were not observed at the Cambridge station.

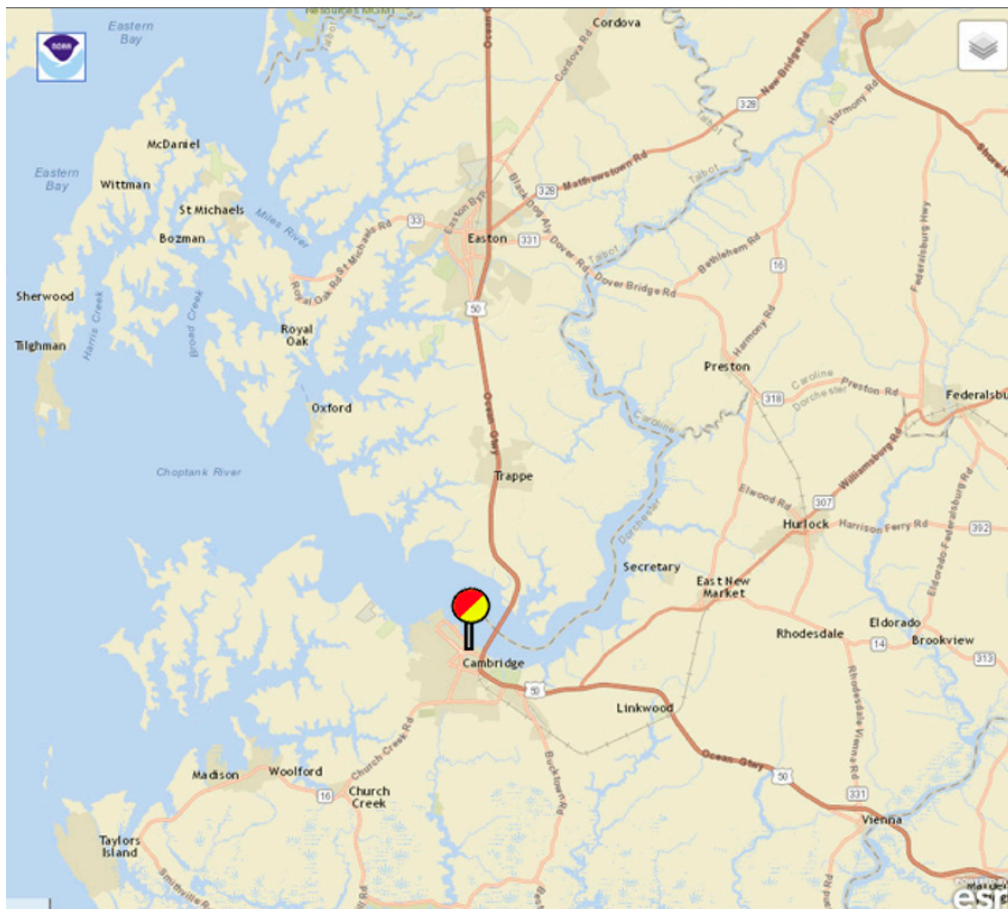


Figure 6-6: Location of the Cambridge tide station

The streamflow gaging station on the Choptank River near Greensboro, MD (station 01491000) with a drainage area of 113.7 square miles is about 50 miles upstream of the tide station. The record at this station is continuous from 1948 to 2015. The time of concentration is 36.9 hours at the gaging station and the travel time from the streamflow gaging station to tidal station is more than 3 days. This means one should add three days to the riverine times given in Table 1 to estimate the timing of the riverine peak discharge at the tidal station.

Table 6-1: Summary of surge and riverine events for the Choptank River (113.7 square miles) and Cambridge tide station

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|--|---|---|
| September 1979 (Tropical Storm David) | September 6 at 2350 hours 20-year event | Time and frequency of riverine peak unknown* |
| November 1985 | November 5 at 0000 hours 15-year event | Date and time of peak unknown < 3-year event |
| September 1996 | September 7 at 0006 hours 25-year event | September 7 at 0345 hours < 1.25 year event |
| September 1999 (Hurricane Floyd) | September 16 at 2350 hours < 2-year event | September 17 at 0445 hours 20-year event |
| September 2003 (Hurricane Isabel) | September 19 at 1100 hours ~100-year event | September 19 at 2100 hours < 2-year event |
| August 2011 (Hurricane Irene) | August 28 at 1600 hours < 2-year event | August 28 at 1000 hours 50-year event |
| October 2012 (Hurricane Sandy) | October 29 at 1736 hours 15-year event | October 30 at 1415 hours (8-year event) |

* The 1979 annual peak discharge occurred on February 26, 1979 (about a 20-year event) – no data available for the peak discharge on September 6, 1979

The data in Table 6-1 indicate that high storm surge and large rainfall-runoff events do NOT tend to occur on the same flooding event. This might imply that the strong wind events do not have high rainfall. The riverine peak discharges generally occur later at the gaging station than the peak storm surges at the tidal station that is 50 miles downstream.

6.8.2 Solomons Island Tide Station

The Solomons Island tide station 8577330 is on the Patuxent River at Solomons near the mouth of the river. The tide station is downstream of MD 4 near the mouth of the Patuxent River at Solomons, MD (see Figure 6-7).

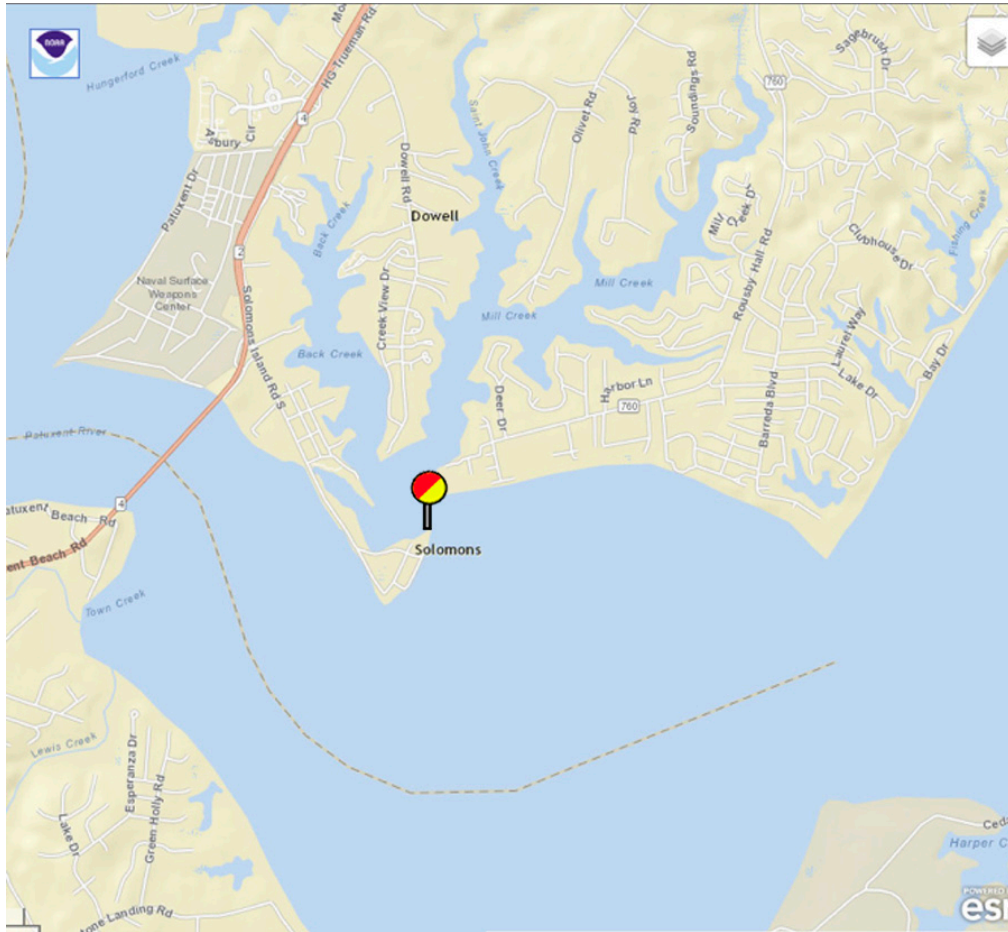


Figure 6-7: Location of the Solomons Island tide station

The streamflow gaging station Patuxent River near Bowie, MD (station 01594440) with a drainage area of 348.9 square miles is 60 miles upstream from the tide station. The record at station 01594440 is from 1978 to 2015 with a historical peak in June 1972 (Hurricane Agnes). The time of concentration at the gaging station is about 21.5 hours and the travel time from the streamflow station to the tide station is about 3 days.

**Table 6-2: Summary of surge and riverine events for the Patuxent River
(348.9 square miles) and Solomons Island tide station**

| Date of Flood Event | Time of surge peak/frequency | Time of riverine peak/frequency |
|---|---|--|
| June 1972 (Tropical Storm Agnes) | No major storm surge | June 22 > 100-year event |
| November 1985 | November 4 at 2000 hours 15-year event | Date and time of peak unknown < 1.1-year event |
| September 1996 (Tropical Storm Fran) | September 6 at 2206 hours 20-year event | September 7 at 2100 hours ~1.1 year event |
| September 2003 (Hurricane Isabel) | September 19 at 1000 hours ~100-year event | September 19 at 2030 hours 2-year event |
| September 2006 | September 1 at 1924 hours 30-year event | September 2 at 2145 hours ~1.1-year event |
| May 2008 | May 11 at 2312 hours May 12 at 0836 hours Two 10-year events | May 13 at 0100 hours 3-year event |
| September 2011 (Tropical Storm Lee) | September 7 at 2342 hours < 2-year event | September 8 at 1200 hours 25-year event |

The data in Table 6-2 indicate that high storm surge and large rainfall-runoff events do NOT tend to occur on the same flooding event. Most of these events are the same as for the Choptank River so a similar conclusion is that the large storm surge events do not have the accompanying high rainfall. For the large storm surge events (10-year event or larger), the riverine frequency was a 3-year event or less. The riverine peak discharges occur later than at the tide station that is 60 miles downstream.

6.8.3 Baltimore Tide Station

The Baltimore tide station 8574680 is in the Patapsco River estuary near Fort McHenry and just north of I-95 (see Figure 6-8).

The Baltimore tide station is in the Patapsco River estuary and there is a gaging station 28 miles upstream of the mouth of the river at Hollofield, MD where the drainage area is 284.7 square miles. The available record for the Patapsco River station 01589000 is from 1945 to 2015 with a historic peak in August 1933. There are a few other smaller drainage areas that also drain into the Patapsco River or nearby Back River estuary from within Baltimore City and those stations were also investigated for timing of the flood events.

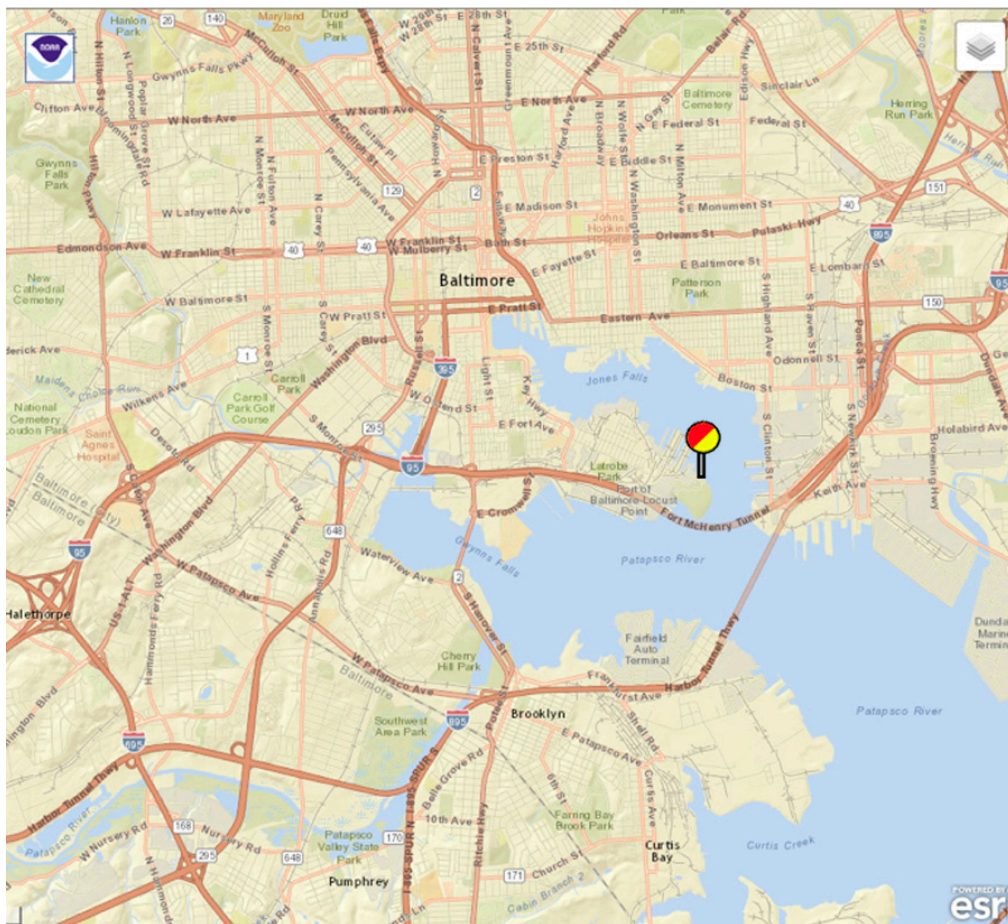


Figure 6-8: Location of the Baltimore tide station

Table 6-3: Summary of surge and riverine events for the Patapsco River (284.7 square miles) and the Baltimore tide station

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|--|--|---|
| August 1933 | August 23 at 2300 hours 80-year event | August 1933 (day unknown) 25-year event |
| November 1950 | November 25 at 2100 hours 10-year event | Date and time of peak unknown <1.25-year event |
| October 1954 (Hurricane Hazel) | October 15 at 1900 hours 10-year event | Date and time of peak unknown <2-year event |
| August 1955 (Tropical Storm Connie) | August 13 at 0800 hours 40-year event | August 13 (time unknown) 2-year event |
| June 1972 (Tropical Storm Agnes) | June 23 at 0600 hours <2-year event | June 22 >200-year event |
| September 1975 (Hurricane Eloise) | September 26 at 2300 hours <2-year event | September 26 50-year event |
| September 1979 (Tropical Storm David) | September 6 at 0700 hours 15-year event | September 6 (time unknown) 2-year event |
| November 1985 | November 4 at 2200 hours 15-year event | Date and time of peak unknown <1.25-year event |
| September 2003 (Hurricane Isabel) | September 19 at 0806 hours 100-year event | September 19 at 0345 hours <1.25-year event |
| September 2011 (Tropical Storm Lee) | September 6 at 0206 hours 2-year event | September 7 at 1322 hours 5-year event |

The data in Table 6-3 indicate that high storm surge and large rainfall-runoff events do NOT tend to occur on the same flooding event. The only exception is the August 1933 flood event where the storm surge was an 80-year event and the riverine peak discharge a 25-year event. For the data before 1990, only the annual maximum peak flows are readily available with just the date (day) of the flood known. In many cases, the annual maximum peak discharge and the annual maximum storm surge do not occur on the same event. The frequency of the riverine peak discharge for the given storm surge event was estimated as being less than a given return period by using return period of the annual maximum peak discharge.

As shown in Table 6-3 (highlighted entries), the riverine flooding events on August 13, 1955 and September 6, 1979 occurred on the same day as the storm surge peak although the riverine events were relatively minor (2-year events). This may be related to the fact that the Patapsco River watershed is in the Piedmont Region and the time of concentration may be less than coastal plain streams of the same watershed size. Or the rainfall may have preceded the storm surge for these two storm events.

There is a streamflow gaging station on Gwynns Falls at Washington Blvd at Baltimore, MD (01589352) where the drainage area is 63.6 square miles. The gaging station is 1.6 miles upstream of the estuary. The record for the Gwynns Falls streamflow station is from 1999 to 2015.

Table 6-4: Summary of surge and riverine events for Gwynns Falls (63.6 square miles) and Baltimore tide station

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|--|--|---|
| August 1999 | No major storm surge | August 26 25-year event |
| September 2003 (Hurricane Isabel) | September 19 at 0806 hours 100-year event | September 18 at 2335 hours < 1.25-year event |
| September 2011 (Tropical Storm Lee) | September 6 at 0206 hours 2-year event | September 7 at 1405 hours 8-year event |

The peak of record at the Gwynns Falls station occurred in August 1999 (25-year event) but there was no significant storm surge event. Other large floods occurred in April, June and July when there were no major storm surge events. Due to the short record at the Gwynns Falls gaging station, there are not many surge events to evaluate.

There is a streamflow gaging station on Moores Run at Radecke Ave at Baltimore, MD where the drainage area is 3.52 square miles. The record available for Moores Run is from 1997 to 2015. The gaging station is 2 miles upstream of the mouth and actually drains into the Back River estuary that should peak about the same time as the Patapsco River estuary.

Table 6-5: Summary of surge and riverine events for Moores Run (3.52 square miles) and the Baltimore tide station

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|--|--|---|
| September 1996 | September 6 at 2118 hours 10-year event | September 6 at 2155 hours 1.25-year event |
| September 2003 (Hurricane Isabel) | September 19 at 0806 hours 100-year event | September 19 at 0009 hours < 1.25-year event |
| September 2011 (Tropical Storm Lee) | September 6 at 0206 hours 2-year event | September 7 at 2353 hours 4-year event |

The Moores Run streamflow station is 3.52 square miles and the timing of the peak riverine and surge events are closer than for the larger riverine stations (except for Tropical Storm Lee). As with the other sites, the major storm surge events did not produce large runoff events. Due to the short record at the Moores Run gaging station, there are not many surge events to evaluate.

6.8.4 Annapolis Tide Station

The Annapolis tide station 8575512 is located at the Naval Academy in Annapolis, MD as shown in Figure 5. This is in the Severn River estuary. There are not many gaged streams that drain into the Severn River estuary. One small streamflow gaging station that does drain into the Severn River estuary is South Fork Jabez Branch at Millersville, MD where the drainage area is 1 square mile. The record length is from 1997 to 2015.

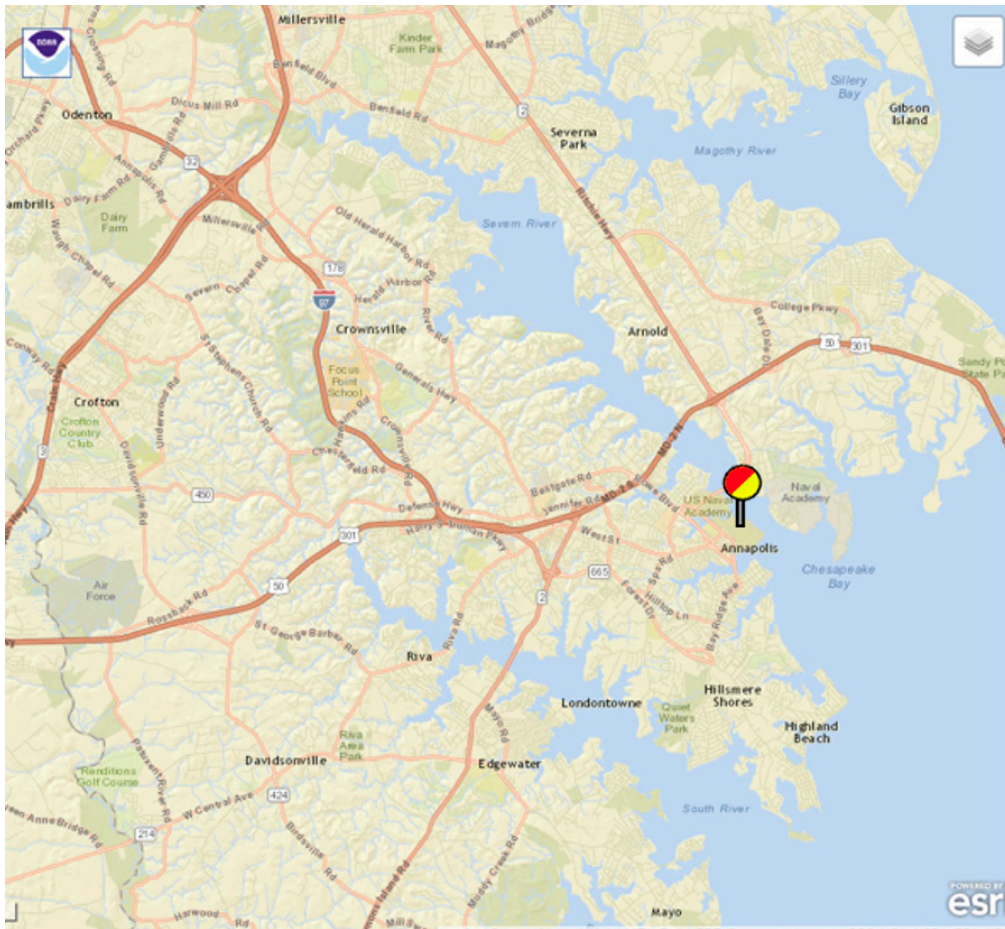


Figure 6-9: Location of the Annapolis tide station

**Table 6-6: Summary of surge and riverine events for SF Jabez Branch
(1.0 square miles) and the Annapolis tide station**

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|--|--|---|
| September 2003 (Hurricane Isabel) | September 19 at 0754 hours 100-year event | September 18 at 2040 hours 20-year event |
| September 2011 (Tropical Storm Lee) | September 8 at 0218 hours <2-year event | September 7 at 2310 hours 100-year event |

These are the same events as used at other stations but the results are a little different. The riverine event for Hurricane Isabel was a 20-year event and actually peaked before the peak surge event. Tropical Storm Lee did not produce a major storm surge but did produce a major runoff event. Due to the short record for the SF Jabez Branch gaging station, there are not many surge events to evaluate.

There are two discontinued gaging stations just west of Annapolis that drain into the South River estuary south of Annapolis:

- North River near Annapolis (station 01590000) – drainage area = 8.93 square miles, period of record 1932-1973, and
- Bacon Ridge Branch at Chesterfield (station 01590500 – drainage area = 6.97 square miles, period of record 1944-52, 1965-90.

Data for surge and riverine events are summarized in Tables 6-7 and 6-8 for these two stations to supplement the limited data in Table 6-6 and to provide data for storm surge events prior to 1990.

**Table 6-7: Summary of surge and riverine events for North River
(8.93 square miles) and the Annapolis tide station**

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|----------------------------------|---|--|
| August 1933 | August 23 at 2100 hours 50-year event | August 23 (time unknown) 1.5-year event |
| November 1950 | November 25 at 1700 hours 5-year event | Date and time unknown 1.5-year event |
| August 1955 (Hurricane Diane) | August 13 at 0700 hours 12-year event | August 13 (time unknown) 20-year event |

**Table 6-8: Summary of surge and riverine events for Bacon Ridge Branch
(6.97 square miles) and the Annapolis tide station**

| Date of flood event | Time of surge peak/frequency | Time of riverine peak/frequency |
|----------------------------|--|---|
| November 1950 | November 25 at 1700 hours 5-year event | Date and time unknown 3-year event |
| September 1979 | September 6 at 0500 hours 12-year event | September 6 (time unknown) 15-year event |
| November 1985 | November 4 at 2200 hours 12-year event | Date and time unknown < 1.25-year event |

The highlighted data in Tables 6-7 and 6-8 indicate that the riverine flood for August 1955 was a 20-year event for the North River and the riverine flood for September 6, 1979 was a 15-year event for Bacon Ridge Branch while the tidal events were both 12-year events. This is the first evidence we have that major storm surges and riverine peak discharges can occur approximately at the same time. The tidal and riverine peaks occurred on the same day although the timing of the riverine flood peaks are unknown (only know the day (date) of the annual peak discharge). Both riverine stations have drainage areas less than 10 square miles.

CHAPTER SEVEN

7 Recommendations and Future Research

7.1 INTRODUCTION

In spite of the volume of research reported in professional literature, knowledge of many aspects of applied engineering hydrology is lacking. In this section, some aspects of design hydrology that require additional research are identified along with the potential benefits that could result from better knowledge about these topics. Research on the topics below would possibly enable better decisions to be made with respect to the use of hydrologic methods in hydrologic design.

7.2 CLIMATE CHANGE

Climate Change is an emerging issue that has significant potential impacts on highway infrastructure planning and design. Climate change is anticipated to result in rising baseline water levels in tidally-influenced areas of Maryland, with commensurate shifts in the tidal range in this zone. Additionally, precipitation intensity-duration-frequency (IDF) relationships, currently quantified by the NOAA Atlas 14 dataset, are expected to shift, and most likely increase, as climate change becomes more pronounced.

The need for this research is further reinforced by the 2012 executive order from then Governor Martin O'Malley, "Climate Change and Coast Smart Construction Executive Order 01.01.2012.29". This executive order enacted directives to increase the resilience of Maryland's infrastructure to sea level rise and coastal flooding from storm events. As with other Maryland state agencies, the MSHA was directed to consider the risk of coastal flooding and sea level rise when they design capital budget projects. The executive order requires new and replaced structures to be elevated two or more feet above the 100-year base flood elevation.

In the tidally-influenced zone, significant areas will simply be lost to inundation while other areas may be protected from tidal encroachment. Research on strategies to plan for and manage infrastructure in both situations is needed. In many cases, the costs of elevating MSHA roads as instructed would result in prohibitive costs, and may also have unintended negative consequences on flows and sediment transport experienced during normal and amplified tidal conditions.

In riverine systems, early results from MSHA sponsored-research suggests varying degrees of change in precipitation IDF for the mid-21st century. This research uses simulated 3-hour timestep precipitation forecasts (NARCCAP, 2016) as input to precipitation frequency analysis software. Output from the frequency analysis is used to create operational IDF estimates covering the GISHydro domain. There is a research need to determine the best approach for employing these estimates and their associated

uncertainty into future designs. As many MSHA structures have planned operational lifetimes of 50 years and more, there exists a great need for similar estimates of precipitation IDF corresponding to the end of the 21st century. Although the CMIP3 and CMIP5 research efforts (CMIP, 2016) produce *daily* precipitation depths for the end of the 21st century, these simulated data are insufficient to create IDF estimates for shorter durations (e.g. 3, 6, and 12 hours). The arrival of such higher temporal resolution precipitation forecasts in the near future is likely. Uncertainties associated with these longer-range climate forecasts will be greater than for mid-century forecasts. The most appropriate planning and design strategy to accommodate these uncertainties also merits further research.

7.3 TIME OF CONCENTRATION

The time of concentration is a principal input to most hydrologic design methods. The velocity method generally uses Manning's equation to compute the velocity. The NRCS WinTR-55 kinematic wave equation is frequently applied for computing travel time for shallow sheet flow.

When the velocity is computed using Manning's equation, estimates of the roughness coefficient, the hydraulic radius, and the slope are required. Each of these inputs is important, and error or uncertainty in the inputs reduces the accuracy of estimates of the time of concentration. Roughness varies considerably with river stage. Since the river stage for a design discharge is related to the return period of the flow, the roughness used to compute a velocity should depend on the cross section that reflects the discharge rate for the design return period. Research on the effects of depth dependent Manning roughness coefficients on time of concentration is needed. If only the roughness of bankfull flow is used when the design return period would suggest out-of-bank flow conditions, the estimated velocity and, therefore, the computed T_c could be significantly different than the most appropriate value.

An estimated velocity is sensitive to the hydraulic radius. The hydraulic radius is a function of the stage of flow, which as indicated above depends on the return period. The hydraulic radius also depends on the shape of the cross section, which can vary considerably along a channel. Therefore, it is necessary to understand the sensitivity of computed velocities when using a single supposedly representative hydraulic radius for a stream in which the cross section changes noticeably over the channel length. Research on the effects of variation in both the return period and cross-section characteristics as they relate to the hydraulic radius could improve the estimation of T_c .

If a representative cross section is difficult to select because of excessive variation in cross section characteristics throughout a channel reach, the Fish and Wildlife Service (FWS) (2002) equations can be used to compute the cross-section characteristics. While preliminary analyses suggest that these equations provide reasonable estimates in Maryland, more analyses of these equations using data from Maryland are needed.

The slope of a channel section is computed using the elevation drop and the reach length. Generally, the variation in reach length for different scale maps is considerably greater than variation in the elevation drop. Where the reach length is estimated from a map, the accuracy of the length will influence the accuracy of the computed slope. If a large map scale is used and the scale of the map prevents accurate depiction of the meanders, then the overall length could be underestimated, which leads to an overestimate of the slope and velocity and an underestimate of the T_c . The significance of this factor needs investigation.

Empirical models are possible alternatives to the velocity method. While a number of studies indicate that some empirical models provide reasonable estimates of T_c , the accuracy of empirical models for use in Maryland has not been evaluated. Useful research could result from using times of concentration obtained from rainfall-runoff data to assess the accuracy of empirical equations. As additional research, T_c values estimated from rainfall-runoff data could be used with measured physiographic data to calibrate empirical equations for different regions of Maryland and develop a synthetic hydrograph in conjunction with these times.

Another alternative to the velocity method is to define the time of concentration from observed rainfall hyetographs and discharge hydrographs. Using this approach, the time of concentration is defined as the time from the ending of rainfall excess to the first inflection point on the recession of the discharge hydrograph. Regression analysis can be used to relate the computed time of concentration to watershed and climatic characteristics for the gaged watershed. Estimates of the time of concentration can be made at ungaged locations by simply determining the watershed and climatic characteristics and applying the regression equation.

An alternative procedure to determine T_c from rainfall-runoff data is first to determine the event runoff curve number based on rainfall and runoff volumes. The next step is to set up a WinTR-20 data set with the watershed drainage area, curve number, and event rainfall table and try different T_c 's until the simulated hydrographs as close as possible the actual hydrographs. The dimensionless unit hydrograph may also be adjusted, if needed, to provide a better match of simulated and actual hydrographs.

A regression equation for estimating time of concentration for Maryland streams is described in Appendix 6. The regression approach is easy to use and provides reproducible estimates, but the time of concentration is generally in excess of that determined by the velocity method. The computed times of concentration and the resultant regression equation given in Appendix 6 were generally based on runoff events less than the 2-year flood. Research is needed to determine if the time of concentration varies significantly with the magnitude and frequency of peak discharge.

7.4 UNIT HYDROGRAPH PEAK RATE FACTORS

While some research on the peak rate factor for the NRCS unit hydrograph has been completed, additional work is still needed. Most importantly, peak rate factors need to be estimated from hydrograph data, not just peak discharge data. It is important to estimate the peak rate factor from unit hydrographs computed from measured hyetographs and hydrographs. This research could show the geographic variation of peak rate factors, as well as the extent of their uncertainty. The Hydrology Panel has begun research on estimating peak rate factors using observed rainfall and runoff data for streams in the Appalachian Plateau and Western Coastal Plain Regions. The current procedures are to use a 484 peak rate factor for the Appalachian Plateau and 284 for the Western Coastal Plain. Comparisons of WinTR-20 analyses to statistical data indicate that the currently used peak rate factors may not be the most appropriate. The results of the peak rate factor research was not completed in time to include in this edition of the Hydrology Panel report and will be included in the next edition.

Additionally, peak rate factors computed from unit hydrographs obtained from rainfall-runoff data could be compared to the peak rate factors computed using geomorphic unit hydrographs derived from time-area curves. This would enable geomorphic unit hydrographs to be combined with hyetograph – hydrograph generated unit hydrographs in selecting regional peak rate factors. Improving estimates of the peak rate factor for Maryland watersheds will improve design accuracy.

7.5 PEAK DISCHARGE TRANSPOSITION

While various forms of peak discharge transposition from gaged to ungaged locations are widely used, surprisingly little understanding of their accuracy exists. The results provided by McCuen and Levy (1999) for Pennsylvania, Virginia, and Maryland appear to be the only empirical assessment of the transposition procedure. The PA/VA/MD data base is sparse; therefore, these results need to be verified for other data sets. The USGS method of transposing peak discharges to ungaged locations within 50 percent of the drainage area of the gaging station is based primarily on engineering judgment. The variation of the weighting functions, both of the area-ratio and USGS methods, needs to be assessed over a broader range of data. The structures of the weighting functions need to be specifically evaluated.

Research on alternative transposition methods should be performed to assess the accuracy of the methods. The results would increase the confidence that could be placed in their use. Without this additional research, transposition methods should be used with caution.

7.6 TRANSFORMATION OF ZONING-MAP INFORMATION INTO HYDROLOGIC MODEL INPUT

Some designs require assessment for ultimate-development watershed conditions. The input to hydrologic models for ultimate-development conditions often requires obtaining information from zoning maps. Zoning maps delineate areas assigned to different land use categories. However, these categories are not consistent across political boundaries and, more importantly, a systematic method for transforming the land use categories into inputs for hydrologic models is lacking. For example, different jurisdictions use different notations for the various densities of residential development, and measures of the corresponding impervious area, which is important input to hydrologic design methods, are not provided or are ambiguously assessed.

While it would be useful to have standard zoning classifications for all jurisdictions in Maryland, this is unlikely to happen. Even this would not eliminate the need for a procedure for transforming zoning map classifications into input parameters for hydrologic design methods. Research could provide a procedure for estimating model inputs such as impervious areas and curve numbers from zoning classifications. This would improve the reproducibility of designs.

7.7 ADJUSTING WINTR-20 USING REGRESSION EQUATION ESTIMATES

When applying the WinTR-20 adjustment procedure using the confidence limit on the regression equation, the regression estimate plus one standard error of prediction window is recommended herein. This value is based on the judgment and hydrologic experience of the Panel members.

Research needs to be undertaken on the most accurate and appropriate confidence level, which will probably vary with geographic region, return period, drainage area and project. A systematic research effort should provide confidence levels that can make WinTR-20 adjustments more accurate.

7.8 THE DESIGN STORM

Before NOAA Atlas 14 was published, the traditional approach followed in Maryland was to use the NRCS Type II 24-hour duration storm as the input to the WinTR-20. The depth of precipitation was selected from the appropriate precipitation duration frequency maps. The access of precipitation data and use of the data to develop site-specific rainfall distributions has changed with the release of WinTR-20 version 3.10. NOAA Atlas 14 precipitation data may be downloaded and saved as a text file from the NOAA web site for a location selected by the user. This text file may then be imported to WinTR-20. Rainfall distributions are developed for each return period based on the ratio of rainfall at durations of 5 minutes to 12 hours to the 24 hour rainfall.

After application of WinTR-20, if the WinTR-20 over-predicts peak discharge, a major portion of the problem may originate from the severity of this design storm input. Twenty-four hours may be too long and the storm distribution may not be appropriate for all parts of Maryland. The 24-hour duration coupled with the NRCS storm distribution may be especially inappropriate for Western Maryland where gaged discharges tend to be much lower than those estimated by the WinTR-20 model. More research is needed to finalize a synthetic storm structure and duration to be used for specific frequencies and locations.

A flood hydrograph study for the State of Maryland by the U.S. Geological Survey (Dillow, 1998) identified 278 rainfall-runoff events at 81 gaging stations throughout Maryland. These rainfall-runoff events were used to develop dimensionless hydrographs for three hydrologic regions in Maryland and to estimate the average basin lag time for each of the 81 gaging stations.

These rainfall-runoff data were used to investigate the duration of rainfall to provide insight into whether the 24-hour duration storm used with the WinTR-20 model was reasonable. Rainfall events were analyzed for 10 gaging stations where one of the runoff events exceeded a 10-year event. The time from the beginning of rainfall to the ending of rainfall, including intermittent periods of rainfall, was tabulated. The longest duration storms tended to be tropical depressions such as the November 1985 Hurricane Juan that caused severe flooding in Western Maryland or the June 1972 Hurricane Agnes that caused extensive flooding across central Maryland and Delaware. The duration of these tropical depressions ranged from 14 to 24 hours.

Spring and summer rainfall events were generally less than 10 hours in duration. A few spring or summer rainfall events in Western Maryland exceeded 10 hours in duration but the rainfall was intermittent with long periods of no rainfall. Based on a limited sample of events, it appears that rainfall events in Western Maryland are less intense than in Central and Eastern Maryland and this may contribute to the lower peak discharges per square mile that have been observed in this region.

Additional research is needed to determine the most appropriate storm duration and structure for use with WinTR-20.

7.9 GEOMORPHIC UNIT HYDROGRAPHS

Standard unit hydrograph shapes are used in hydrologic design. For Maryland, the NRCS 484-UHG and 284-UHG are used. Research suggests that the most appropriate unit hydrograph for a watershed is one that is based on the geomorphic characteristics of the watershed. Recent research in the professional literature suggests that time-area based unit hydrographs accurately regenerate observed storm runoffs. With the capability of GIS to generate watershed boundaries and internal drainage structures from digital terrain

data, it is feasible to use GIS to develop a unit hydrograph that is unique to a watershed, thus improving the accuracy of design hydrographs.

A study of Maryland watersheds should be undertaken to evaluate the accuracy of geomorphic unit hydrographs. Predictions of storm runoff based on these should be compared with predictions based on the 484-UHG and 284-UHG. Both the NRCS and geomorphic unit hydrographs could be compared with measured runoff events in Maryland to assess their accuracy.

7.10 STATISTICAL ALTERNATIVES

The Fixed Region regression equations are applicable to both rural and urban ($\geq 10\%$ impervious) watersheds in the Western Coastal Plains and the Piedmont-Blue Ridge Regions. For the urban watersheds, a “relatively constant period of urbanization” was defined as a change in impervious area of less than 50 percent during the period of record. If a watershed had 20 percent impervious area at the beginning of record, it could have no more than 30 percent impervious area at the end of the time period (Sauer and others, 1983). For the most recent regional analyses in 2015, a shorter period of record was used for a few urban stations in order to achieve a more homogeneous record (less change in impervious area). No urban stations were eliminated from the analysis based on these criteria. For future analyses, a more detailed approach should be developed for determining a homogeneous period for frequency analysis or for adjusting the annual peak data to existing land use conditions.

The Maryland Department of Planning (MDP) data were used to estimate land use conditions such as impervious area. The MDP approach is to assign a percentage of impervious area to various land use categories. For example, Institutional Lands are assigned an impervious area of 50 percent but there is considerable variation in impervious area for this land use category. Impervious area as estimated from the MDP data was statistically significant in estimating flood discharges for urban watersheds in the Western Coastal Plains and the Piedmont-Blue Ridge Regions but this variable did not explain as much variability as anticipated. For future analyses, a more detailed approach should be developed for determining a homogeneous period for frequency analysis or for adjusting the annual peak data to existing conditions. Improved measures of urbanization would likely provide more accurate regression equations in the future.

Many of the gaging stations on small watersheds (less than about 10 square miles) were discontinued in the late 1970s resulting in generally short periods of record for the small watersheds in Maryland. As described earlier, Carpenter (1980) and Dillow (1996) utilized estimates of flood discharges from a calibrated rainfall-runoff model for eight gaging stations in Maryland. Carpenter (1980) also adjusted flood discharges at 17 other small watersheds in the Appalachian Plateau and Piedmont Regions based on comparisons to nearby long-term gaging station data. Thomas and Moglen (2015) utilized graphical frequency analyses and graphical record extension techniques at selected sites in developing the Fixed Region regression equations in Appendix 3 of this

report. There were many short-record stations in Maryland for which no adjustment was made. For future analyses, a more detailed or systematic approach should be used for record extension techniques to obtain improved estimates of flood discharges for short-record stations in Maryland. Improving the data base of small watershed data would provide more accurate regression equations in the future.

Finally, only stations primarily in Maryland were used in developing the Fixed Region regression equations in Appendix 3 because the required land use data were not available in neighboring states. The exception was the inclusion of nine gaging stations in Delaware. For future analyses, comparable land use data should be investigated for nearby states in order to increase the number of gaging stations used in the regression analysis.

7.11 DEVELOPMENT OF A MODEL FOR USE ON MIXED URBAN-RURAL WATERSHEDS

An increasing number of watersheds of concern to the SHA are going to have some portions that are highly urbanized and other areas that are in agricultural or forest land cover. The WinTR-20 model can adjust the structure of the runoff flow paths to reflect man-made drainage, and urban curve number categories can define the land covers. However, the WinTR-20 was not designed for this type of watershed. The dimensionless UHG, as one example, was derived from rural watershed data.

The SHA needs a deterministic model that can handle a rational partitioning of the watershed into urban and rural segments. Such a model would not have to be a totally original system. It could be a combination of two models, one of which would be implemented on the urbanized portions and the other on the rural portions. The urban component might draw on the EPA Storm Water Management Model as a base and the rural component could be a revision of the WinTR-20. The mechanics of this approach could be done today. However, a significant level of research would have to be conducted to put the components into a package that would give consistent results and would be relatively easy to run.

7.12 MUSKINGUM-CUNGE CHANNEL ROUTING PROCEDURE

A research project similar to that of Ragan and Pfefferkorn (1992) is needed to indicate the changes in the routed hydrograph caused by different decisions on the input parameters to the Muskingum-Cunge method. The project will need to provide more guidance to the user on the selection of the input parameters than is currently available. The project should be based on actual stream gage data. More research is needed in selecting a representative cross section location and developing a representative cross section based on a number of cross sections within a routing reach.

7.13 RELATIONSHIP OF PERCENT IMPERVIOUS AND LAND USE

The current guidelines used by SHA for percent impervious and land use are taken from WinTR-55. There are many other sources for this relationship and many are related to the technique used to determine the land use. Aerial photograph analysis has provided additional sources for this relationship. A research effort is needed to provide additional guidelines for determining percent impervious for various land uses. This would provide the SHA a better idea of the curve number that should be used with the range of normal land use categories.

7.14 RECOMMENDATIONS FOR UPDATING THE HYDROLOGY PANEL REPORT

The recommendations provided in this report are based on a combination of hydrologic judgment, existing reports and methodologies, and limited testing and evaluations of new concepts. The centerpiece of the recommendations is to quasi-calibrate the WinTR-20 deterministic watershed model using the regional regression equations where these equations are applicable. This approach has not been tested extensively but appears to be a logical approach for improving estimates of flood discharges for Maryland and for combining the strengths of WinTR-20 modeling and regional regression equations. As more experience is gained with this approach and as technology changes, this approach may need to be revised. Similarly, as new research is completed, new technology should be incorporated into this report.

This report should be considered a dynamic report with updates as needed. SHA and MDE should jointly pursue the recommended research to improve the estimation of flood discharges for Maryland streams. To date four editions of the Panel report have been developed in 2001, 2006, 2010 and 2016 to incorporate new data and research.

7.15 SUMMARY OF THE MAJOR RESEARCH ITEMS

In summary, there are many areas of hydrology that require additional research if we are to improve our confidence in the modeling process. It is imperative that a continuing, well-conceived and adequately funded research program be implemented to address a number of problems, especially:

Improving the structure and duration of the design storms,

Determining if the T_c varies significantly with the magnitude and frequency of peak discharge,

Using the time-area curve available from the digital terrain data to generate geomorphic unit hydrographs that are unique for the watershed being modeled,

Continuing research on the regionalized peak factors to be used with the NRCS dimensionless unit hydrograph,

Continuing analysis of the Fish & Wildlife Service equations (McCandless and Everett, 2002; McCandless, 2003 a; and McCandless, 2003b) for cross section characteristics,

Continuing analysis of the impact of the method of estimating channel length on the computation of slope,

Improving methods for estimating travel times through rural and urban watersheds,

Refining the transposition procedures of peak discharges from a gaging station,

Providing improved statistical alternatives to develop estimates of the 2- to 500-year peak discharges for rural and urban streams in Maryland,

Defining guidelines for the application of the Muskingum-Cunge routing module in the NRCS WinTR-20,

Developing guidelines for estimating NRCS runoff curve numbers from information on planning and zoning maps,

Improving the effects of depth-dependent Manning roughness coefficients on the time of concentration,

Investigation of the procedure for estimating the model inputs such as impervious and curve number from zoning classifications,

Developing a more detailed approach for determining a homogeneous period for frequency analysis or for adjusting the annual peak data to existing conditions, and

Developing a more systematic approach for adjusting the short record stations.

REFERENCES

AASHTO, 1991, *Model Drainage Manual*: American Association of State Highway and Transportation Officials, Washington, D.C.

Arcement, G.J., and Schneider, V.R., 1984, *Guide for Selecting Manning's Roughness Coefficients for Natural Channels and Flood Plains*, US Department of Transportation, Federal Highway Administration, Report No. FHWA-TS-84-204, April 1984.

Arihood, L.D., D.R. Glatfelter, 1991, *Method for Estimating Low-Flow Characteristics of Ungaged Streams in Indiana*, U.S. Geological Survey Water-Supply Paper 2372, 19 p.

Bedient, P.B. and Huber, W.C., 1992, *Hydrology and Floodplain Analysis*: Addison-Wesley, 2nd Edition, Reading, MA, 672 p.

Berg, T.M., comp., 1980, Geologic map of Pennsylvania: Pennsylvania Topographic and Geological Survey, 4th Series, 1 map on 2 sheets, scale 1:250,000, plus 1 sheet of cross sections.

Bingham, R.H., 1982, *Low-Flow Characteristics of Alabama Streams*, U.S. Geological Survey Water-Supply Paper 2083, Washington, DC, 27 p.

Bingham, R.H., 1985, *Regionalization of Low-Flow Characteristics of Tennessee Streams*, U.S. Geological Survey Water-Resources Investigations Report 85-4191, Nashville, TN.

Bonnin, G., Martin, D., Lin, B., Parzybok, T., Yekta, M., and Riley, D., 2006, *Precipitation-Frequency Atlas of the United States, Volume 2, Version 3.0*: NOAA Atlas 14, National Oceanic and Atmospheric Administration, National Weather Service, Silver Spring, Maryland, <http://hdsc.nws.noaa.gov/>

Burn, D.H., 1990, *Evaluation of regional flood frequency analysis with a region of influence approach*: Water Resources Research, 26(10), pp. 2257-2265.

Butts, C., and Edmundson, R.S., 1963, Geologic map of Frederick County, Virginia: Virginia Department of Conservation and Economic Development, 1 sheet, scale 1:62,500.

Cardwell, D.H., comp., 1968, Geologic map of West Virginia: West Virginia Geological and Economic Survey, 1 map on 2 sheets, scale 1:250,000. (Reprinted 1986.)

Carpenter, D.H., 1980, *Technique for Estimating Magnitude and Frequency of Floods in Maryland*: USGS Water-Resources Investigations Open-File Report 80-1016, U.S. Geological Survey, Towson, MD.

Carpenter, D.H. and D.C. Hayes, 1996. *Low-flow characteristics of streams in Maryland and Delaware*. U.S. Geological Survey Water-Resources Investigations Report, 94-4020, 113 p.

Casey, M.J., J.H. Stagge, G.E. Moglen, and R.H. McCuen, (2015). "The Effects of Watershed Subdivision on Peak Discharge in Rainfall Runoff Modeling in the WinTR-20 model." *Journal of Hydrologic Engineering*, ASCE. DOI: 10.1061/(ASCE)HE.1943-5584.0001188.

Chow, V.T., 1959, *Open-Channel Hydraulics*: McGraw-Hill Book Co., New York, 680 p.

CMIP (Coupled Model Intercomparison Project) (2016). <<<http://cmip-pcmdi.llnl.gov/>>> (Accessed August 14, 2016).

Curran, C.A., K. Eng, C.P. Konrad, 2012, *Analysis of Low Flows and Selected Methods for Estimating Low-Flow Characteristics at Partial-Record and Ungaged Stream Sites in Western Washington*, U.S. Geological Survey Scientific Investigations Report 2012-5078, 46 p.

Dillow, J.J.A., 1996, *Technique for Estimating Magnitude and Frequency of Peak Flows in Maryland*: USGS Water-Resources Investigations Report 95-4154, U.S. Geological Survey, Baltimore, MD, 55p.

Dillow, J.J.A., 1998, *Technique for simulating peak-flow hydrographs in Maryland*: U.S. Geological Survey Water-Resources Investigations Report 97-4279, 39 p.

Duigon, M.T., 2001, *Karst Hydrogeology of the Hagerstown Valley, Maryland*: RI 73, Maryland Geological Survey, 128 p.

Dunne, T. and Leopold, L.B., 1978, *Water in environmental planning*: W.H. Freeman and Co., San Francisco, California, 818 p.

Edwards, J.E., Jr., comp., 1978, Geologic map of Washington County: Maryland Geological Survey, 1 sheet, scale 1:62,500.

Fasken, G.B., 1963, *Guide to Selecting Roughness Coefficient n Values for Channels*: Soil Conservation Service, USDA, 45 p.

Flynn, K.M., Kirby, W.H., and Hummel, P.R., 2006, *User's Manual for Program PeakFQ, Annual Flood-Frequency Analysis Using Bulletin 17B Guidelines*: Chapter 4 of Book 4, Section B, Techniques and Methods 4-B4, U.S. Geological Survey, Reston, VA, 42 p.

Fellows, J.D., 1983, *A Geographic Information System for Hydrologic Modeling*, PHD Dissertation, University of Maryland, Department of Civil Hydrologic, College Park, Maryland.

Funkhouser, J.E., K. Eng, M.W. Moix, 2008, *Low-Flow Characteristics and Regionalization of Low-Flow Characteristics for Selected Stream in Arkansas*, U.S. Geological Survey Scientific Investigations Report 2008-5065, 161 p.

Hardison, C.H., 1971, *Prediction Error of Regression Estimates of Streamflow Characteristics at Ungaged Sites*: U.S. Geological Survey Professional Paper 750-C, pp. C228-C236.

Hardison, C.H., 1976, *Estimates of 100-yr floods and the need for appraising their accuracy*: Presented at the Second Annual Meeting of the American Geophysical Union Midwestern Region.

Hodge, S.A., and Tasker, G.D., 1995, *Magnitude and frequency of floods in Arkansas*: U.S. Geological Survey Water-Resources Investigations Report 95-4224.

Hortness, J.E., 2006, *Estimating Low-Flow Frequency Statistics for Unregulated Streams in Idaho*, U.S. Geological Survey Scientific Investigations Report 2006-5035, 31 p.

Hosking, J.R.M., and J.R. Wallis, 1993. Some statistics useful in regional frequency analysis, *Water Resour. Res.*, 29, 271.

Hosking, J.R.M., and Wallis, J.R., 1997, *Regional frequency analysis, an approach based on L-moments*: Cambridge University Press, Cambridge, United Kingdom.

Hubbard, D.A., Jr., 1990, Geologic map of Clarke County, Virginia: Virginia Department of Mines, Minerals and Energy, Division of Mineral Resources Publication 102, pl. 1, scale 1:50,000.

Interagency Advisory Committee on Water Data, 1982, *Guidelines for Determining Flood Flow Frequency*: Bulletin 17B of the Hydrology Subcommittee, U.S. Geological Survey, Office of Water Data Coordination, Reston, Virginia, 183 p.

Jonas, A.I., and G.W. Stose, 1938, Geologic map of Frederick County and adjacent parts of Washington and Carroll Counties: Maryland Geological Survey, 1 sheet, scale 1:62,500.

Kilgore, R.T., B.S. Bergendahl, and R.H. Hotchkiss, 2010, *Culvert Design for Aquatic Organism Passage*, Hydraulic Engineering Circular No. 26, First Edition, Federal Highway Administration Publication No. FHWA-HIF-11-008, October 2010.

Koltun, G.F., and R.R. Schwartz, 1987, *Multiple-Regression Equations for Estimating Low Flows at Ungaged Stream Sites in Ohio*, U.S. Geological Survey Water-Resources Investigations Report 86-4354, 39 p.

Martin, G.R., and L.D. Arihood, 2010, *Methods for Estimating Selected Low-Flow Frequency Statistics for Unregulated Streams in Kentucky*, U.S. Geological Survey Scientific Investigations Report 2010-5217, 83 p.

Maryland Hydrology Panel, 2006, *Application of Hydrologic Methods in Maryland: A report prepared by the Maryland Hydrology Panel convened by the Maryland State Highway Administration and the Maryland Department of the Environment*, <http://www.gishydro.eng.umd.edu/panel.htm>, August 2006, 293 p.

Maryland Hydrology Panel, 2010, *Application of Hydrologic Methods in Maryland (3rd Edition): A report prepared by the Maryland Hydrology Panel convened by the Maryland State Highway Administration and the Maryland Department of the Environment*, September 2010, <http://www.gishydro.eng.umd.edu/panel.htm>.

Maryland State Highway Administration, and Maryland Department of the Environment, 2001, *Application of Hydrologic Methods in Maryland: A report prepared by the Hydrology Panel*, February 1, 2001.

Maryland State Highway Administration, and Maryland Department of the Environment, 2006, *Application of Hydrologic Methods in Maryland: A report prepared by the Hydrology Panel*, August 2006.

McCandless, T.L., and Everett, R.A., 2002, *Maryland stream survey: Bankfull discharge and channel characteristics of streams in the Piedmont Hydrologic Region*: U.S. Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S02-01.

McCandless, T.L., 2003a, *Maryland stream survey: Bankfull discharge and channel characteristics of streams in the Allegheny Plateau and Valley and Ridge Hydrologic Regions*: U.S. Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S03-01.

McCandless, T.L., 2003b, *Maryland stream survey: Bankfull discharge and channel characteristics of streams in the Coastal Plain Hydrologic Region*: U.S. Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S03-02.

McCuen, R.H., 1993, *Microcomputer applications in statistical hydrology*: Prentice Hall, Englewood Cliffs, New Jersey, 306 p.

McCuen, R.H., and Thomas, W.O., Jr., 1991, *Flood frequency analysis techniques for urbanizing watersheds*: Proceedings of the Urban Hydrology Symposium at the AWRA annual meeting in Denver, Colorado, November 4-8, 1990, pp. 35-46.

McCuen, R.H., and Levy, B.S., 2000, *Evaluation of peak discharge transposition*: ASCE Journal of Hydrologic Engineering, Vol. 5, No. 3, pp. 278-289.

Merkel, W. H., July, 2000, “*Muskingum-Cunge Flood Routing in NRCS Hydrologic Models*”, Second Interagency Hydrologic Modeling Conference, Las Vegas, NV

Merkel, W. H, et. al, 2006, *Design Rainfall Distributions Based on NOAA 14 Volumes 1 and 2 Data*, Proceedings of the Third Federal Interagency Hydrologic Modeling Conference, Reno, Nevada, April, 2006.

Moglen, G.E., 2007, *Introduction to GISHydro2000*: Training Manual, November 2007, <http://www.gishydro.eng.umd.edu>, University of Maryland, College Park, Maryland.

Moglen, G. E., Thomas, W.O., Jr., and Cuneo, C. G., 2006, *Evaluation of Alternative Statistical Methods for Estimating Frequency of Peak Flows in Maryland*: Final report (SP907C4B), Maryland State Highway Administration, Baltimore, Maryland.

Montgomery, D.C., and Peck, E.A., 1982, *Introduction to linear regression analysis*: John Wiley & Sons, 504 p.

NARCCAP (North American Regional Climate Change Assessment Program) (2016). <<<http://www.narccap.ucar.edu/data/>>> (Accessed August 14, 2016).

Pilon, P.J. and Harvey, K.D., 1992, *Consolidated Frequency Analysis (CFA), Version 3.1 Reference Manual*, Environment Canada, Ottawa, Ontario, 130 p.

Ragan, R.M., and Pfefferkorn, R.L., 1992, *Analysis of the role of storm and stream parameters on the performance of the SCS-TR-20 and HEC-1 under Maryland conditions*: Maryland State Highway Administration AW092-351-046, Final Report, Baltimore, Maryland, 93 p.

Ree, W.O., 1949, *Hydraulic Characteristics of Vegetation for Vegetated Waterways*: Agricultural Engineering, vol. 30, no 4, April, 1949.

Ries, K.R. III, 2007, *The National Streamflow Statistics Program: A Computer Program for Estimating Streamflow Statistics for Ungaged Sites*, Chapter 6 of Book 4, Hydrologic

Analysis and Interpretation, Section A, Statistical Analysis, Techniques and Methods 4-A6, 37 p.

Ries, K.G., III, and Dillow, J.J.A., 2006, *Magnitude and Frequency of Floods on Nontidal Streams in Delaware*: USGS Scientific Investigations Report 2006-5146, U.S. Geological Survey, Baltimore, MD.

Rosgen, D.L., 1996, *Applied River Morphology*: Wildland Hydrology, Pagosa Springs, Colorado.

Sauer, V.B., 1974, *Flood Characteristics of Oklahoma Streams*: U.S. Geological Survey Water-Resources Investigations Report 52-73, 301 p.

Sauer, V.B., Thomas, W.O., Jr., Stricker, V.A., and Wilson, K.V., 1983, *Flood characteristics of urban watersheds in the United States*: U.S. Geological Survey Water-Supply Paper 2207, 63 p.

Siebach, P.R., 1987, *Integration of Desktop Image Processing Geographic Information Systems for the Operation of HEC-1*, Master of Science Thesis, University of Maryland, Department of Civil Engineering, College Park, MD.

Stedinger, J.R., R.M. Vogel, and E. Foufoula-Georgia, 1993, Chapter 18 *Frequency Analysis of Extreme Events*: in Handbook of Hydrology, David Maidment, Editor in Chief, McGraw-Hill, Inc.

Stuckey, M.H., 2006, *Low-Flow, Base-Flow, and Mean-Flow Regression Equations for Pennsylvania Streams*: U.S. Geological Survey Scientific Investigations Report 2006-5130, 84 p.

Tasker, G.D. and Stedinger, J.R., 1989, *An operational GLS model for hydrologic regression*: Journal of Hydrology, vol. 111, pp. 361-375.

Thomas, W.O., Jr., Monde, M.C., and Davis, S.R., 2000, *Estimation of time of concentration for Maryland streams*: Transportation Research Record No. 1720, Transportation Research Board, National Research Council, National Academy Press, Washington, DC, pp. 95-99.

Thomas, W.O., Jr. and Moglen, G.E., 2015, *Regression Equations for Estimating Flood Discharges for the Piedmont, Blue Ridge, and Appalachian Plateau Regions in Western Maryland*: Maryland State Highway Administration Research Report, MD-14-SP09B4S, July, 2015.

U.S. Army Corps of Engineers, 2009, *HEC-SSP Statistical Software Package*: User's Manual, Version 1.1, Hydrologic Engineering Center, Davis, California, 214 p.

- U.S. Army Corps of Engineers, 1986, *Accuracy of computed water surface profiles*: Hydrologic Engineering Center, RD-26, Davis, California, 177 p.
- U.S. Army Corps of Engineers, 2010, *HEC-SSP Statistical Software Package, User's Manual, Version 2.0*, October 2010, Report No. CPD-86, Hydrologic Engineering Center, Davis, California.
- U.S. Army Corps of Engineers, 2016, *HEC-RAS River Analysis System, User's Manual, Version 5.0*, February 2016, 960 p.
- U.S. Department of Agriculture, 1956, *Supplement B of the National Hydrologic Handbook, Section 5, Hydraulics*: Soil Conservation Service, Washington, DC.
- U.S. Department of Agriculture, 2004, *National Engineering Handbook, Part 630, Hydrology*: Natural Resources Conservation Service, Washington, DC.
- U.S. Department of Agriculture, 2009, *Small Watershed Hydrology: WinTR-55 User Guide*, Natural Resources Conservation Service, Washington, D.C.
- U.S. Department of Agriculture, 2015, *WinTR-20 User Guide*, Natural Resources Conservation Service, Washington D.C.
- U.S. Water Resources Council, 1977, *Guidelines for Determining Flood Flow Frequency*: Bulletin 17A of Subcommittee on Hydrology, U.S. Water Resources Council, Washington, D.C.
- U.S. Water Resources Council, 1981, *Estimating peak flow frequencies for natural ungaged watersheds – A proposed nationwide test*: Hydrology Committee, U.S. Water Resources Council, Washington, D.C., 346 p.
- Viessman, W. Jr., Lewis, G.L., and Knapp, J.W., 1989, *Introduction to Hydrology*: Harper Collins Publishers, New York, New York, 780 p.
- Welle, P.I., and Woodward, D.E., 1989, *Dimensionless Unit Hydrograph for the Delmarva Peninsula*: Transportation Research Record 1224, Transportation Research Board, National Research Council, Washington, D.C., pp. 79-80.

Blank page inserted to preserve left-right pagination format.

**APPENDIX 1
WATERSHED PROPERTIES
FOR USGS STREAM GAGES
IN MARYLAND AND DELAWARE**

Watershed Properties for USGS Stream Gages in Maryland and Delaware

This appendix tabulates the values used in developing the Fixed Region Regression Equations for streamflow. Different versions of the Fixed Region regression equations use different properties as predictor variables, and no set of equations uses all the properties. For reference and for historical interest, all calculated properties are included, whether or not they are used in regression equations.

Fifty-five properties are tabulated for 186 stations. The stations are grouped into six sets, as described in the Key to this Appendix, first appearing on page A-8 and included with each set of stations.

| <u>Property Name and Description</u> | Table Column Number |
|---|------------------------------------|
| <u>Station Number</u> : the station identification number as reported by the USGS. The leading zero of each gage is omitted. | - |
| <u>Station Name</u> : the station name as reported by the USGS. | - |
| <u>Years of Record</u> : the number of years of gage record, excluding those years of regulated gage record (range: 9 – 89 years) | 1 |
| <u>Area</u> : probably the single most important watershed characteristic for hydrologic design. It reflects the volume of water that can be generated from rainfall. GIS calculated variable equal to the number of pixels composing the watershed times the pixel's area or cell size (mi ²). (range: 0.027 – 816.45 mi ²) | 2 |
| <u>Perimeter</u> : GIS calculated variable equal to the length of the boundary of the watershed (mi). (range: 2.0 – 249.7 mi) | 3 |
| <u>Length</u> : GIS calculated variable equal to the distance measured along the main channel from the watershed outlet to the basin divide (mi). (range: 0.8 – 72.4 mi) | 4 |
| <u>Channel Slope</u> : the change of elevation with respect to distance along the principal flow path. The channel slope was calculated using GIS as the difference in elevation between two points located 10 and 85% of the distance along the main channel from the outlet divided by the distance between the two points (ft/mile). (range: 1.99 – 250.6 ft/mile) | 5 |

| <u>Property Name and Description</u> | Table Column Number |
|--|------------------------------------|
| <u>Watershed Slope</u> : the average basin slope is the average of all neighborhood slopes determined along the steepest direction of flow. These are the local slopes determined from the upstream to downstream pixel for each pixel within the watershed (ft/ft). This quantity is represented by the symbol “LSLOPE” in the Fixed Region Method text. (range: 0.00250 – 0.22653 ft/ft) | 6 |
| <u>Basin Relief</u> : the average elevation of all points within the watershed minus the elevation at the outlet of the watershed (ft). (range: 16.2 – 1,363.4 ft) | 7 |
| <u>Lime</u> : the percentage of limestone within the watershed (%). (range: 0 – 100 percent) | 8 |
| <u>High Elev.</u> : the percentage of area within the watershed with elevation in excess of 2000 feet. (range: 0 – 100 percent) | 9 |
| <u>Hypsometric Ratio</u> : hypsometric area ratio, a single-valued index of the hypsometric curve, equal to the ratio of the area under the normalized hypsometric curve. (range: 0.18 – 0.74) | 10 |
| <u># First Order Streams</u> : the number of first order streams in the watershed as defined by the 1:250,000 mapping in the digitized National Hydrography Dataset. (range: 0 – 405) | 11 |
| <u>Total Stream Length</u> : total length of streams in the watershed as defined by the 1:250,000 mapping in the digitized National Hydrography Dataset. (range: 0 – 1,546.9 mi) | 12 |
| <u>Area in MD</u> : the percentage of the watershed area that is within Maryland boundaries (range: 0.5 – 100) | 13 |
| <u>2-yr Prec</u> : the 2-yr, 24-hour precipitation depth in hundredths of an inch (range: 2.243 – 3.760 inches) | 14 |
| <u>100-yr Prec</u> : the 100-yr, 24-hour precipitation depth in hundredths of an inch (range: 5.247 – 9.436 inches) | 15 |
| <u>Res70</u> : the percentage of the basin defined as residential by the USGS 1970’s land use (%). (range: 0 – 82.6 percent) | 16 |
| <u>Com70</u> : the percentage of the basin defined as commercial by the USGS 1970’s land use (%). (range: 0 – 33.9 percent) | 17 |

| <u>Property Name and Description</u> | Table Column Number |
|--|------------------------------------|
| <u>Ag70</u> : the percentage of the basin defined as agricultural by the USGS 1970's land use (%). (range: 0 – 100 percent) | 18 |
| <u>For70</u> : the percentage of the basin defined as forest by the USGS 1970's land use (%). (range: 0 – 100 percent) | 19 |
| <u>St70</u> : the percentage of the basin defined as storage by the USGS 1970's land use (%). (range: 0 – 16.9 percent) | 20 |
| <u>IA70</u> : the percentage of the basin defined as impervious area by the USGS 1970's land use (%). Impervious area includes the following land use classifications: residential, commercial, industrial, transportation, industrial/commercial complexes, mixed urban or built-up land, dry salt flats, and bare exposed rock. (range: 0 – 49.3 percent) | 21 |
| <u>Res85</u> : the percentage of the basin defined as residential by the Ragan 1985 land use (%). (range: 0 – 68.7 percent) | 22 |
| <u>Com85</u> : the percentage of the basin defined as commercial by the Ragan 1985 land use (%). (range: 0 – 27.2 percent) | 23 |
| <u>Ag85</u> : the percentage of the basin defined as agricultural by the Ragan 1985 land use (%). (range: not available) | 24 |
| <u>For85</u> : the percentage of the basin defined as forest by the Ragan 1985 land use (%). (range: 2.7 – 100 percent) | 25 |
| <u>St85</u> : the percentage of the basin defined as storage by the Ragan 1985 land use (%). (range: 0 – 15.9 percent) | 26 |
| <u>IA85</u> : the percentage of the basin defined as impervious area by the Ragan 1985 land use (%). Impervious area includes the following land use classifications: low density residential, medium density residential, high density residential, commercial, industrial, institutional, extractive, open urban land, bare exposed rock, and bare ground. (range: 0 – 41.1 percent) | 27 |
| <u>Res90</u> : the percentage of the basin defined as residential by the (Maryland Office of Planning (MOP) 1990 land use (%). (range: 0 – 69.2 percent) | 28 |
| <u>Com90</u> : the percentage of the basin defined as commercial by the MOP 1990 land use (%). (range: 0 – 26.1 percent) | 29 |

| <u>Property Name and Description</u> | Table Column Number |
|--|------------------------------------|
| <u>Ag90</u> : the percentage of the basin defined as agricultural by the MOP 1990 land use (%). (range: 0 – 97.8 percent) | 30 |
| <u>For90</u> : the percentage of the basin defined as forest by the MOP 1990 land use (%). (range: 0 – 98.8 percent) | 31 |
| <u>St90</u> : the percentage of the basin defined as storage by the MOP 1990 land use (%). (range: 0 – 16.0 percent) | 32 |
| <u>IA90</u> : the percentage of the basin defined as impervious area by the MOP 1990 land use (%). Impervious area includes the following land use classifications: low density residential, medium density residential, high density residential, commercial, industrial, institutional, extractive, open urban land, bare exposed rock, and bare ground. (range: 0 – 43.8 percent) | 33 |
| <u>Res97</u> : the percentage of the basin defined as residential by the MOP 1997 land use (%). (range: 0 – 65.0 percent) | 34 |
| <u>Com97</u> : the percentage of the basin defined as commercial by the MOP 1997 land use (%). (range: 0 – 33.9 percent) | 35 |
| <u>Ag97</u> : the percentage of the basin defined as agricultural by the MOP 1997 land use (%). (range: 0 – 96.3 percent) | 36 |
| <u>For97</u> : the percentage of the basin defined as forest by the MOP 1997 land use (%). (range: 0 – 99.3 percent) | 37 |
| <u>St97</u> : the percentage of the basin defined as storage by the MOP 1997 land use (%). (range: 0 – 14.4 percent) | 38 |
| <u>IA97</u> : the percentage of the basin defined as impervious area by the MOP 1997 land use (%). (range: 0 – 45.4 percent) | 39 |
| <u>For00</u> : the percentage of the basin defined as forest by the MOP 2000 land use (%). (range: 0 – 99.3 percent) | 40 |
| <u>St00</u> : the percentage of the basin defined as storage by the MOP 2000 land use (%). (range: 0 – 4.1 percent) | 41 |
| <u>IA00</u> : the percentage of the basin defined as impervious area by the MOP 2000 land use (%). (range: 0 – 50.7 percent) | 42 |

| Property Name and Description | Table Column Number |
|--|----------------------------|
| <u>For02</u> : the percentage of the basin defined as forest by the MOP 2002 land use (%). (range: 0 – 97.8 percent) | 43 |
| <u>St02</u> : the percentage of the basin defined as storage by the MOP 2002 land use (%). (range: 0 – 4.3 percent) | 44 |
| <u>IA02</u> : the percentage of the basin defined as impervious area by the MOP 2002 land use (%). (range: 0 – 51.1 percent) | 45 |
| <u>For10</u> : the percentage of the basin defined as forest by the MOP 2010 land use (%). (range: 0 – 99.8 percent) | 46 |
| <u>St10</u> : the percentage of the basin defined as storage by the MOP 2010 land use (%). (range: 0 – 3.3 percent) | 47 |
| <u>IA10</u> : the percentage of the basin defined as impervious area by the MOP 2010 land use (%). (range: 0 – 53.5 percent) | 48 |
| <u>CN70</u> : the average runoff curve number for the basin as defined by the USGS 1970's land use. Soils data are from the NRCS STATSGO dataset. (range: 57 – 84.1) | 49 |
| <u>CN97</u> : the average runoff curve number for the basin as defined by the MOP 1997 land use. Impervious area includes the following land use classifications: low density residential, medium density residential, high density residential, commercial, industrial, institutional, extractive, open urban land, bare exposed rock, bare ground, transportation, large lot agriculture, large lot forest, feeding operations, and agricultural buildings. (range: 57.1 – 84.6) | 50 |
| <u>Hyd. A</u> : the percentage of the basin defined as hydrologic soil A, computed as the number of pixels of hydrologic soil A divided by the number of pixels in the basin (%). This is computed from SSURGO soils data data. (range: 0 – 67.4 percent) | 51 |
| <u>Hyd. B</u> : the percentage of the basin defined as hydrologic soil B, computed as the number of pixels of hydrologic soil B divided by the number of pixels in the basin (%). This is computed from SSURGO soils data data. (range: 0 – 100 percent) | 52 |


| <u>Property Name and Description</u> | Table Column Number |
|---|------------------------------------|
| <u>Hyd. C</u> : the percentage of the basin defined as hydrologic soil C, computed as the number of pixels of hydrologic soil C divided by the number of pixels in the basin (%). This is computed from SSURGO soils data data. (range: 0 – 100 percent) | 53 |
| <u>Hyd. D</u> : the percentage of the basin defined as hydrologic soil D, computed as the number of pixels of hydrologic soil D divided by the number of pixels in the basin (%). This is computed from SSURGO soils data data. (range: 0 – 86.3 percent) | 54 |
| <u>Province</u> : the physiographic province in which the watershed is located (A = Appalachian, B = Blue Ridge, E = Eastern Coastal Plain, P = Piedmont, W = Western Coastal Plain). | 55 |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 1)

| Stations (USGS Numbers) | Pages in Appendix |
|--------------------------------|--------------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

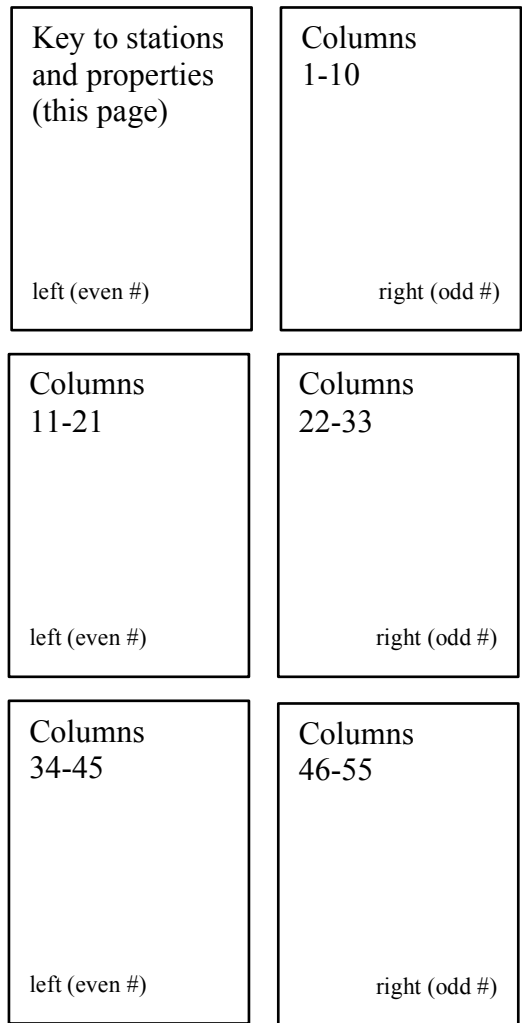

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|--|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1483200 | Blackbird Creek at Blackbird, DE | 54 | 4.1 | - | - | 14.8 | 0.016 | 41.9 | - | - | - |
| 1483500 | Leipsic River near Cheswold, DE | 33 | 9.6 | - | - | 8.51 | 0.012964 | 39.05 | - | - | - |
| 1483720 | Puncheon Branch at Dover, DE | 10 | 2.55 | - | - | 14.08 | 0.009333 | 18.31 | - | - | - |
| 1484000 | Murderkill River near Felton, DE | 31 | 13.24 | - | - | 6.98 | 0.006163 | 27.28 | - | - | - |
| 1484002 | Murderkill River Tributary near Felton, DE | 10 | 0.91 | - | - | 14.14 | 0.009338 | 24.59 | - | - | - |
| 1484050 | Pratt Branch near Felton, DE | 10 | 3.08 | - | - | 11.96 | 0.010631 | 28.59 | - | - | - |
| 1484100 | Beaverdam Branch at Houston, DE | 49 | 3.55 | - | - | 5.93 | 0.003982 | 14.64 | - | - | - |
| 1484300 | Sowbridge Branch near Milton, DE | 22 | 7.17 | - | - | 8.63 | 0.007492 | 28.45 | - | - | - |
| 1484500 | Stockley Branch at Stockly, DE | 62 | 5.27 | - | - | 4.92 | 0.005009 | 17.49 | - | - | - |
| 1485000 | Pocomoke River near Willards, MD | 57 | 56.09 | 82.5 | 15.9 | 1.99 | 0.004265 | 20.08 | 0 | 0 | 0.42 |
| 1485500 | Nassawango Creek near Snow Hill, MD | 57 | 45.02 | 64.6 | 15.7 | 2.81 | 0.0042 | 30.31 | 0 | 0 | 0.39 |
| 1486000 | Manokin Branch near Princess Anne, MD | 53 | 5.02 | 23.4 | 7.1 | 5.68 | 0.003493 | 18.93 | 0 | 0 | 0.59 |
| 1486100 | Andrews Branch near Delmar, MD | 10 | 3.27 | - | - | 7.76 | 0.00642 | 17.82 | 0 | - | - |
| 1486980 | Toms Dam Branch near Greenwood, DE | 10 | 6.44 | - | - | 1.99 | 0.003013 | 7.42 | 0 | - | - |
| 1487000 | Nanticoke River near Bridgeville, DE | 64 | 72.94 | - | - | 2.74 | 0.004762 | 29.48 | 0 | - | - |
| 1487900 | Meadow Branch near Delmar, DE | 9 | 4.11 | - | - | 3.07 | 0.002498 | 6.73 | 0 | - | - |
| 1488500 | Marshyhope Creek near Adamsville, DE | 60 | 47.4 | - | - | 2.9 | 0.00446 | 21.41 | 0 | - | - |
| 1489000 | Faulkner Branch near Federalsburg, MD | 42 | 7.69 | 25.3 | 6.7 | 5.91 | 0.010423 | 25.76 | 0 | 0 | 0.6 |
| 1490000 | Chicamacomico River near Salem, MD | 34 | 16.35 | 31.6 | 8.4 | 5.93 | 0.00627 | 26.39 | 0 | 0 | 0.54 |
| 1490600 | Meredith Branch Near Sandtown, DE | 10 | 9.17 | - | - | 5.82 | 0.004407 | 20.7 | - | - | - |
| 1490800 | Oldtown Branch at Goldsboro, MD | 10 | 4.06 | 20.2 | 4.7 | 7.87 | 0.005156 | 17.19 | 0 | 0 | 0.62 |
| 1491000 | Choptank River near Greensboro, MD | 59 | 113.71 | 94.9 | 21.7 | 3.35 | 0.006099 | 42.07 | 0 | 0 | 0.44 |
| 1491010 | Sangston Prong near Whiteleysburg, DE | 10 | 2.04 | - | - | 4.2 | 0.004419 | 11.27 | 0 | - | - |
| 1491050 | Spring Branch near Greensboro, MD | 10 | 3.34 | 17.3 | 4.9 | 4.92 | 0.003465 | 17.56 | 0 | 0 | 0.61 |
| 1492000 | Beaverdam Branch at Matthews, MD | 32 | 5.49 | 20 | 5.7 | 11.28 | 0.0069 | 34.82 | 0 | 0 | 0.74 |
| 1492050 | Gravel Run at Beulah, MD | 11 | 8.9 | 22.5 | 5 | 9.56 | 0.011444 | 34.63 | 0 | 0 | 0.67 |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | 36 | 7.6 | 23.7 | 7.4 | 9.53 | 0.008995 | 36.71 | 0 | 0 | 0.62 |
| 1492550 | Mill Creek near Skipton, MD | 11 | 4.61 | 16.3 | 4.9 | 14.35 | 0.006818 | 33.11 | 0 | 0 | 0.62 |
| 1493000 | Unicorn Branch near Millington, MD | 56 | 20.19 | - | - | 5.91 | 0.008739 | 47.2 | 0 | - | - |
| 1493500 | Morgan Creek near Kennedyville, MD | 55 | 11.97 | 28.1 | 7.6 | 9.11 | 0.009899 | 39.25 | 0 | 0 | 0.62 |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|--|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1483200 | Blackbird Creek at Blackbird, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1483500 | Leipsic River near Cheswold, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1483720 | Puncheon Branch at Dover, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484000 | Murderkill River near Felton, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484002 | Murderkill River Tributary near Felton, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484050 | Pratt Branch near Felton, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484100 | Beaverdam Branch at Houston, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484300 | Sowbridge Branch near Milton, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1484500 | Stockley Branch at Stockly, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1485000 | Pocomoke River near Willards, MD | 27 | 99.8 | 33.4 | 333.9 | 858.8 | 0.6 | 0 | 53.1 | 29.4 | 16.9 | 0.2 |
| 1485500 | Nassawango Creek near Snow Hill, MD | 9 | 54.5 | 100 | 355.6 | 914.4 | 0.8 | 0.5 | 18.1 | 79.4 | 1.2 | 0.8 |
| 1486000 | Manokin Branch near Princess Anne, MD | 2 | 7.9 | 100 | 338 | 869 | 0.1 | 0 | 24.1 | 75.7 | 0 | 0 |
| 1486100 | Andrews Branch near Delmar, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1486980 | Toms Dam Branch near Greenwood, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1487000 | Nanticoke River near Bridgeville, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1487900 | Meadow Branch near Delmar, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1488500 | Marshyhope Creek near Adamsville, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1489000 | Faulkner Branch near Federalsburg, MD | 5 | 14.6 | 100 | 359 | 921 | 1.7 | 0 | 75.4 | 22.9 | 0 | 0.6 |
| 1490000 | Chicamacomico River near Salem, MD | 9 | 26.7 | 100 | 334.1 | 859.7 | 0.4 | 0.1 | 51.1 | 48.1 | 0.3 | 0.2 |
| 1490600 | Meredith Branch Near Sandtown, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1490800 | Oldtown Branch at Goldsboro, MD | 3 | 8 | 100 | 337 | 865 | 1.1 | 0 | 65.4 | 29.8 | 3.6 | 0.4 |
| 1491000 | Choptank River near Greensboro, MD | 68 | 232.7 | 31.6 | 330.5 | 848.1 | 2.6 | 0.1 | 52.7 | 37.1 | 7.1 | 1.1 |
| 1491010 | Sangston Prong near Whiteleysburg, DE | - | - | - | - | - | - | - | - | - | - | - |
| 1491050 | Spring Branch near Greensboro, MD | 2 | 6.3 | 99.8 | 337 | 865 | 1.9 | 0 | 76.7 | 21.4 | 0 | 0.7 |
| 1492000 | Beaverdam Branch at Matthews, MD | 3 | 10.9 | 100 | 317 | 814 | 1.2 | 0 | 67.9 | 31 | 0 | 0.4 |
| 1492050 | Gravel Run at Beulah, MD | 7 | 13.7 | 100 | 359 | 921 | 1 | 0 | 87.3 | 11 | 0 | 0.4 |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | 3 | 11.9 | 100 | 345 | 887 | 4.7 | 0 | 64.5 | 30.8 | 0 | 1.8 |
| 1492550 | Mill Creek near Skipton, MD | 2 | 7 | 99.5 | 345 | 887 | 0 | 0 | 91.7 | 8.3 | 0 | 0 |
| 1493000 | Unicorn Branch near Millington, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1493500 | Morgan Creek near Kennedyville, MD | 7 | 17 | 100 | 315.8 | 810.4 | 1.2 | 0 | 93.3 | 5.4 | 0.2 | 0.4 |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com85 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1483200 | Blackbird Creek at Blackbird, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1483500 | Leipsic River near Cheswold, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1483720 | Puncheon Branch at Dover, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484000 | Murderkill River near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484002 | Murderkill River Tributary near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484050 | Pratt Branch near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484100 | Beaverdam Branch at Houston, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484300 | Sowbridge Branch near Milton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484500 | Stockley Branch at Stockly, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1485000 | Pocomoke River near Willards, MD | 0.2 | 1.8 | 0 | 34.2 | 0 | 1.5 | 0.3 | 0.1 | 57.8 | 34.7 | 0 | 0.5 |
| 1485500 | Nassawango Creek near Snow Hill, MD | 1.2 | 1.6 | 0 | 65.6 | 0.3 | 1.7 | 1.5 | 0.9 | 20.4 | 64.5 | 0.3 | 1.3 |
| 1486000 | Manokin Branch near Princess Anne, MD | 0.6 | 1.6 | 0 | 57.4 | 0 | 1.5 | 1.4 | 0 | 22.4 | 57.7 | 0 | 0.6 |
| 1486100 | Andrews Branch near Delmar, MD | - | - | - | 84.2 | - | 1 | - | - | - | - | - | - |
| 1486980 | Toms Dam Branch near Greenwood, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1487000 | Nanticoke River near Bridgeville, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1487900 | Meadow Branch near Delmar, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1488500 | Marshyhope Creek near Adamsville, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1489000 | Faulkner Branch near Federalsburg, MD | 1.5 | 3.2 | 0 | 18.6 | 0 | 3 | 2.1 | 0.3 | 75.4 | 19.6 | 0 | 1.4 |
| 1490000 | Chicamamico River near Salem, MD | 0.2 | 0 | 0 | 46.4 | 0.1 | 0.2 | 0.5 | 0 | 51.8 | 39.6 | 3.1 | 0.4 |
| 1490600 | Meredith Branch Near Sandtown, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1490800 | Oldtown Branch at Goldsboro, MD | 1.1 | 0.6 | 0 | 33.1 | 0 | 0.7 | 6 | 0.4 | 62 | 31.5 | 0 | 2 |
| 1491000 | Choptank River near Greensboro, MD | 2.5 | 0.1 | 0 | 41 | 0.3 | 0.8 | 5.4 | 0.1 | 51.7 | 38 | 0.3 | 1.6 |
| 1491010 | Sangston Prong near Whiteleysburg, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1491050 | Spring Branch near Greensboro, MD | 0 | 0 | 0 | 20.4 | 0 | 0 | 1.2 | 0 | 77.3 | 19.8 | 0 | 0.3 |
| 1492000 | Beaverdam Branch at Matthews, MD | 0 | 0.6 | 0 | 27.9 | 0 | 0.6 | 1.1 | 0 | 65.6 | 29.1 | 0 | 0.4 |
| 1492050 | Gravel Run at Beulah, MD | 0.2 | 1.3 | 0 | 15 | 0.3 | 1.3 | 0.4 | 0 | 71 | 15 | 0.4 | 0.5 |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | 0.5 | 0 | 0 | 30.4 | 0 | 0.1 | 1.4 | 0 | 66.8 | 31.8 | 0 | 0.3 |
| 1492550 | Mill Creek near Skipton, MD | 0 | 0 | 0 | 12.2 | 0 | 0 | 0 | 0 | 93.1 | 7.4 | 0 | 0 |
| 1493000 | Unicorn Branch near Millington, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1493500 | Morgan Creek near Kennedyville, MD | 1 | 0.4 | 0 | 8.9 | 0.2 | 0.6 | 0.9 | 0.3 | 89.8 | 8.5 | 0.6 | 0.6 |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1483200 | Blackbird Creek at Blackbird, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1483500 | Leipsic River near Cheswold, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1483720 | Puncheon Branch at Dover, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484000 | Murderkill River near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484002 | Murderkill River Tributary near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484050 | Pratt Branch near Felton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484100 | Beaverdam Branch at Houston, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484300 | Sowbridge Branch near Milton, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1484500 | Stockley Branch at Stockly, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1485000 | Pocomoke River near Willards, MD | 1.5 | 0 | 57 | 33.7 | 0 | 0.7 | - | - | - | - | - | - |
| 1485500 | Nassawango Creek near Snow Hill, MD | 3.1 | 1.3 | 19.5 | 64.6 | 0.3 | 2 | - | - | - | - | - | - |
| 1486000 | Manokin Branch near Princess Anne, MD | 2.2 | 0 | 22.1 | 51.3 | 0 | 0.8 | - | - | - | - | - | - |
| 1486100 | Andrews Branch near Delmar, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1486980 | Toms Dam Branch near Greenwood, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1487000 | Nanticoke River near Bridgeville, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1487900 | Meadow Branch near Delmar, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1488500 | Marshyhope Creek near Adamsville, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1489000 | Faulkner Branch near Federalsburg, MD | 4.5 | 0.8 | 73.2 | 18.7 | 0 | 2.1 | - | - | - | - | - | - |
| 1490000 | Chicamacomico River near Salem, MD | 1.5 | 0.1 | 50.9 | 41.9 | 0.5 | 0.8 | - | - | - | - | - | - |
| 1490600 | Meredith Branch Near Sandtown, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1490800 | Oldtown Branch at Goldsboro, MD | 9.4 | 0.3 | 61.2 | 28.9 | 0 | 2.9 | - | - | - | - | - | - |
| 1491000 | Choptank River near Greensboro, MD | 6.9 | 0.3 | 50.9 | 36.3 | 0.3 | 2.2 | - | - | - | - | - | - |
| 1491010 | Sangston Prong near Whiteleysburg, DE | - | - | - | - | - | - | - | - | - | - | - | - |
| 1491050 | Spring Branch near Greensboro, MD | 2.3 | 0 | 75.9 | 19.7 | 0 | 0.6 | - | - | - | - | - | - |
| 1492000 | Beaverdam Branch at Matthews, MD | 3.1 | 0 | 66 | 26.8 | 0 | 1 | - | - | - | - | - | - |
| 1492050 | Gravel Run at Beulah, MD | 4.6 | 0.2 | 74.9 | 13.5 | 0.6 | 2 | - | - | - | - | - | - |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | 2.3 | 0 | 68.1 | 29.6 | 0 | 0.6 | - | - | - | - | - | - |
| 1492550 | Mill Creek near Skipton, MD | 0.5 | 0 | 91.8 | 8.2 | 0 | 0.1 | - | - | - | - | - | - |
| 1493000 | Unicorn Branch near Millington, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1493500 | Morgan Creek near Kennedyville, MD | 1.1 | 0.4 | 87.9 | 10 | 0.5 | 0.8 | - | - | - | - | - | - |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware


| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|--|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1483200 | Blackbird Creek at Blackbird, DE | - | - | - | - | - | 0 | 65.6 | 14.6 | 19.5 | E |
| 1483500 | Leipsic River near Cheswold, DE | - | - | - | - | - | 0 | 65.1 | 8.6 | 26 | E |
| 1483720 | Puncheon Branch at Dover, DE | - | - | - | - | - | 0 | 78.2 | 3.2 | 18.6 | E |
| 1484000 | Murderkill River near Felton, DE | - | - | - | - | - | 14.3 | 29.2 | 11.1 | 45.3 | E |
| 1484002 | Murderkill River Tributary near Felton, DE | - | - | - | - | - | 78.8 | 14.1 | 3.2 | 3.9 | E |
| 1484050 | Pratt Branch near Felton, DE | - | - | - | - | - | 1.2 | 84.8 | 4 | 10 | E |
| 1484100 | Beaverdam Branch at Houston, DE | - | - | - | - | - | 17.7 | 10.3 | 23.5 | 48.5 | E |
| 1484300 | Sowbridge Branch near Milton, DE | - | - | - | - | - | 50.7 | 37.7 | 2 | 8.7 | E |
| 1484500 | Stockley Branch at Stockly, DE | - | - | - | - | - | 5.1 | 50.1 | 15.5 | 29.3 | E |
| 1485000 | Pocomoke River near Willards, MD | - | - | - | 81.8 | 79.4 | 3.1 | 50.1 | 12.1 | 34.6 | E |
| 1485500 | Nassawango Creek near Snow Hill, MD | - | - | - | 70.1 | 70.9 | 8.6 | 31 | 20.6 | 39.7 | E |
| 1486000 | Manokin Branch near Princess Anne, MD | - | - | - | 74.4 | 74.5 | 1.1 | 31.5 | 13.5 | 53.8 | E |
| 1486100 | Andrews Branch near Delmar, MD | - | - | - | - | - | 8.7 | 22.1 | 26.1 | 43.1 | E |
| 1486980 | Toms Dam Branch near Greenwood, DE | - | - | - | - | - | 9.3 | 23.9 | 35 | 31.8 | E |
| 1487000 | Nanticoke River near Bridgeville, DE | - | - | - | - | - | 10.1 | 33.6 | 20.5 | 35.7 | E |
| 1487900 | Meadow Branch near Delmar, DE | - | - | - | - | - | 0.2 | 9.6 | 32.4 | 57.7 | E |
| 1488500 | Marshyhope Creek near Adamsville, DE | - | - | - | - | - | 1.4 | 16.1 | 13.4 | 69.1 | E |
| 1489000 | Faulkner Branch near Federalsburg, MD | - | - | - | 78.3 | 81.4 | 0.8 | 43 | 20.5 | 35.6 | E |
| 1490000 | Chicamacomico River near Salem, MD | - | - | - | 74.3 | 77.2 | 10.9 | 32.5 | 26.6 | 29.9 | E |
| 1490600 | Meredith Branch Near Sandtown, DE | - | - | - | - | - | 0.1 | 10.4 | 17.2 | 72.3 | E |
| 1490800 | Oldtown Branch at Goldsboro, MD | - | - | - | 78.7 | 80.4 | 0 | 48.7 | 10.9 | 40.4 | E |
| 1491000 | Choptank River near Greensboro, MD | - | - | - | 77.1 | 77.1 | 3.4 | 23.7 | 13.8 | 58.8 | E |
| 1491010 | Sangston Prong near Whiteleysburg, DE | - | - | - | - | - | 0 | 25 | 24.9 | 50.1 | E |
| 1491050 | Spring Branch near Greensboro, MD | - | - | - | 78.2 | 81.6 | 0 | 56.3 | 8 | 35.7 | E |
| 1492000 | Beaverdam Branch at Matthews, MD | - | - | - | 76.3 | 79.1 | 33.5 | 11.8 | 24.9 | 29.8 | E |
| 1492050 | Gravel Run at Beulah, MD | - | - | - | 76.7 | 80.5 | 18.7 | 23.3 | 47.7 | 9.9 | E |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | - | - | - | 75.2 | 78.7 | 0 | 60.8 | 16.2 | 22.8 | E |
| 1492550 | Mill Creek near Skipton, MD | - | - | - | 80.3 | 84.4 | 29.5 | 39.7 | 16.4 | 14.4 | E |
| 1493000 | Unicorn Branch near Millington, MD | - | - | - | - | - | 0.2 | 52.7 | 13.9 | 32.6 | E |
| 1493500 | Morgan Creek near Kennedyville, MD | - | - | - | 76.9 | 81 | 1.4 | 25.2 | 66.8 | 6.1 | E |

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 2)

| Stations (USGS Numbers) | Pages in Appendix |
|-------------------------|-------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

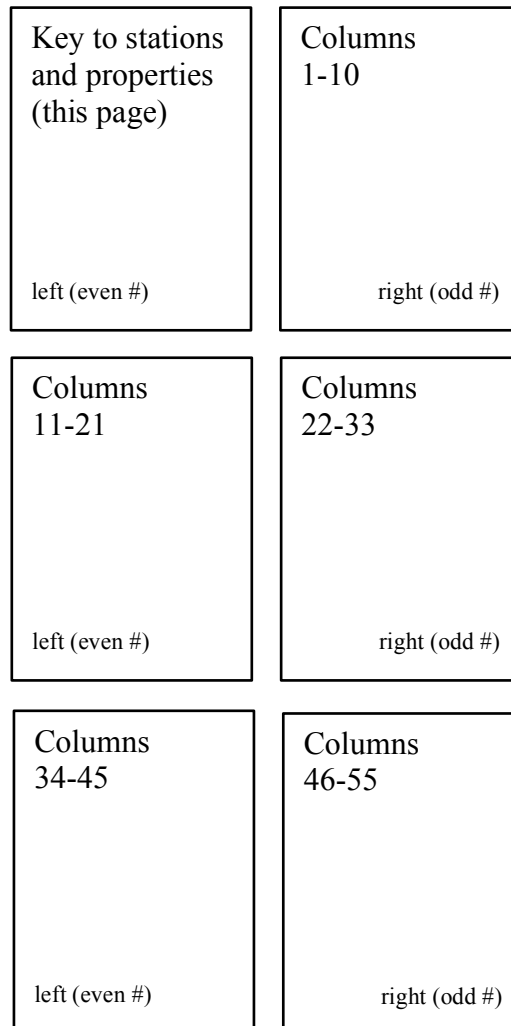

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|--|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1494000 | Southeast Creek at Church Hill, MD | 14 | 12.46 | 25.4 | 7.3 | 6.57 | 0.008415 | 44.28 | 0 | 0 | 0.69 |
| 1495000 | Big Elk Creek at Elk Mills, MD | 80 | 53.36 | 64.4 | 23.9 | 17.5 | 0.073 | 329.9 | 0 | 0 | 0.57 |
| 1495500 | Little Elk Creek at Childs, MD | 12 | 26.46 | 42.7 | 16.8 | 24.2 | 0.06752 | 294.1 | 0 | 0 | 0.58 |
| 1496000 | Northeast River at Leslie, MD | 37 | 24.87 | 42.5 | 14.3 | 24.5 | 0.04863 | 288.5 | 0 | 0 | 0.57 |
| 1496080 | Northeast River Tributary near Charlestown, MD | 10 | 1.75 | - | - | 142.9 | 0.073 | - | 0 | - | - |
| 1496200 | Principio Creek near Principio Furnace, MD | 27 | 9 | 22.1 | 6.7 | 33.2 | 0.06388 | 165.6 | 0 | 0 | 0.58 |
| 1577940 | Broad Creek tributary at Whiteford, MD | 16 | 0.67 | 5.8 | 1.7 | 175.7 | 0.0743 | 107.7 | 0 | 0 | 0.35 |
| 1578500 | Octoraro Creek near Rising Sun, MD | 19 | 191.66 | 99.7 | 43.6 | 10.8 | 0.08256 | 422.8 | 0 | 0 | 0.5 |
| 1578800 | Basin Run at West Nottingham, MD | 10 | 1.25 | - | - | 69.8 | 0.05 | 77.8 | 0 | - | - |
| 1579000 | Basin Run at Liberty Grove, MD | 22 | 5.08 | - | - | 37 | 0.06 | 137.9 | 0 | - | - |
| 1580000 | Deer Creek at Rocks, MD | 86 | 94.31 | 77.9 | 31.3 | 17.9 | 0.103 | 379.1 | 0 | 0 | 0.48 |
| 1580200 | Deer Creek at Kalmia, MD | 11 | 127.16 | 103.8 | 43.8 | 14.2 | 0.09671 | 424 | 0 | 0 | 0.47 |
| 1581500 | Bynum Run at Bel Air, MD | 38 | 8.79 | 20.2 | 7.1 | 45.1 | 0.048 | 144.4 | 0 | 0 | 0.47 |
| 1581700 | Winter Run near Benson, MD | 45 | 34.64 | 42.2 | 17.4 | 30.4 | 0.07 | 315.5 | 0 | 0 | 0.55 |
| 1581752◆ | Plumtree Creek near Bel Air, MD | 11 | 2.47 | - | - | 49.1 | 0.048 | - | 0 | - | - |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | 12 | 27.46 | - | - | 24.9 | 0.112 | - | 2 | - | - |
| 1581830◆* | Grave Run near Beckleysville, MD | 13 | 7.56 | - | - | 57.4 | 0.097 | - | 0 | - | - |
| 1581870◆ | Georges Run near Beckleysville, MD | 13 | 15.76 | - | - | 44.1 | 0.075 | - | 0 | - | - |
| 1581940◆ | Mingo Branch near Hereford, MD | 10 | 0.77 | - | - | 139.6 | 0.105 | - | 0 | - | - |
| 1581960◆ | Beetree Run at Bentley Springs, MD | 13 | 9.66 | - | - | 61.4 | 0.098 | - | 0 | - | - |
| 1582000 | Little Falls at Blue Mount, MD | 69 | 53.7 | 53.4 | 18.6 | 33.1 | 0.103 | 364.1 | 0 | 0 | 0.54 |
| 1582510 | Piney Creek near Hereford, MD | 14 | 1.39 | 7.3 | 2.4 | 92.5 | 0.07866 | 139 | 0 | 0 | 0.62 |
| 1583000* | Slade Run near Glyndon, MD | 36 | 2.05 | 10 | 2.8 | 90.1 | 0.088 | 180.2 | 0 | 0 | 0.51 |
| 1583100 | Piney Run at Dover, MD | 23 | 12.45 | 28.3 | 9 | 49.8 | 0.083 | 274.3 | 0 | 0 | 0.5 |
| 1583495 | Western Run tributary at Western Run, MD | 10 | 0.23 | 3.1 | 1.2 | 168.8 | 0.08274 | 110.5 | 0 | 0 | 0.53 |
| 1583500 | Western Run at Western Run, MD | 68 | 60.31 | 56.1 | 18.8 | 26 | 0.082 | 282.2 | 0 | 0 | 0.43 |
| 1583570◆* | Pond Branch at Oregon Ridge, MD | 17 | 0.131 | - | - | 215.1 | 0.101 | - | 0 | - | - |
| 1583580 | Baisman Run at Broadmoor, MD | 26 | 1.49 | - | - | 112.6 | 0.108 | 218.9 | 0 | - | - |
| 1583600* | Beaverdam Run at Cockeysville, MD | 29 | 20.88 | 30.1 | 11.8 | 45.6 | 0.076 | 292.3 | 0 | 0 | 0.55 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|--|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1494000 | Southeast Creek at Church Hill, MD | 6 | 20.4 | 100 | 340 | 874.1 | 0.5 | 0 | 77.9 | 17.4 | 4.2 | 0.2 |
| 1495000 | Big Elk Creek at Elk Mills, MD | 22 | 85.6 | 20.1 | 318.9 | 802.7 | 2.4 | 3 | 80.2 | 14.2 | 0 | 3.7 |
| 1495500 | Little Elk Creek at Childs, MD | 12 | 42.1 | 53.3 | 328.4 | 834.2 | 6.1 | 2 | 75.7 | 15.9 | 0.1 | 4 |
| 1496000 | Northeast River at Leslie, MD | 9 | 34.8 | 69.3 | 325.6 | 824.7 | 2 | 2.4 | 78.8 | 15.3 | 0 | 3 |
| 1496080 | Northeast River Tributary near Charlestown, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1496200 | Principio Creek near Principio Furnace, MD | 4 | 13.4 | 100 | 315.8 | 799.9 | 0 | 0 | 95.7 | 4.2 | 0 | 0 |
| 1577940 | Broad Creek tributary at Whiteford, MD | 1 | 0.9 | 100 | 348 | 872 | 2 | 0.8 | 42.9 | 54.3 | 0 | 1.3 |
| 1578500 | Octoraro Creek near Rising Sun, MD | 88 | 345.8 | 8.3 | 317.1 | 794.5 | 1.5 | 0.7 | 79.3 | 17.6 | 0.5 | 1.3 |
| 1578800 | Basin Run at West Nottingham, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1579000 | Basin Run at Liberty Grove, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1580000 | Deer Creek at Rocks, MD | 42 | 175.4 | 73.4 | 339.4 | 850.4 | 0.9 | 0.4 | 71.8 | 26.7 | 0.1 | 0.7 |
| 1580200 | Deer Creek at Kalmia, MD | 55 | 232.5 | 80.3 | 335.3 | 840.3 | 0.8 | 0.4 | 71.7 | 27 | 0 | 0.6 |
| 1581500 | Bynum Run at Bel Air, MD | 3 | 12.8 | 100 | 322.8 | 809 | 16.2 | 5.2 | 67 | 10.5 | 0 | 10.8 |
| 1581700 | Winter Run near Benson, MD | 13 | 61.5 | 100 | 323 | 809.6 | 6.6 | 0.3 | 71.1 | 20.6 | 0 | 2.8 |
| 1581752◆ | Plumtree Creek near Bel Air, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1581830◆* | Grave Run near Beckleysville, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1581870◆ | Georges Run near Beckleysville, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1581940◆ | Mingo Branch near Hereford, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1581960◆ | Beetree Run at Bentley Springs, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1582000 | Little Falls at Blue Mount, MD | 22 | 96.6 | 91.9 | 334.6 | 839 | 0.2 | 0.9 | 67.2 | 31.6 | 0 | 1 |
| 1582510 | Piney Creek near Hereford, MD | 1 | 2.6 | 100 | 321 | 806 | 0 | 0.6 | 74.4 | 25 | 0 | 0.6 |
| 1583000* | Slade Run near Glyndon, MD | 3 | 5.5 | 100 | 328 | 822 | 5.4 | 0 | 45.4 | 49.2 | 0 | 2.1 |
| 1583100 | Piney Run at Dover, MD | 3 | 19.8 | 100 | 322.2 | 808.7 | 1 | 0.1 | 74.1 | 24.6 | 0.1 | 0.5 |
| 1583495 | Western Run tributary at Western Run, MD | 1 | 0 | 100 | 321 | 806 | 0 | 0 | 100 | 0 | 0 | 0 |
| 1583500 | Western Run at Western Run, MD | 32 | 107.4 | 100 | 321.8 | 807.7 | 0.8 | 0.1 | 71.8 | 27.2 | 0.1 | 0.4 |
| 1583570◆* | Pond Branch at Oregon Ridge, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1583580 | Baisman Run at Broadmoor, MD | - | - | - | - | - | - | - | - | - | - | - |
| 1583600* | Beaverdam Run at Cockeyesville, MD | 8 | 34 | 100 | 310.7 | 779 | 9.5 | 12.6 | 36.7 | 33.7 | 0.2 | 14.5 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com85 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1494000 | Southeast Creek at Church Hill, MD | 0.4 | 0.4 | 0 | 26.3 | 0 | 0.6 | 0.6 | 0.1 | 72.8 | 25.4 | 0.2 | 0.7 |
| 1495000 | Big Elk Creek at Elk Mills, MD | 5.4 | 5.7 | 0 | 36.3 | 0 | 6.4 | 5.2 | 0.3 | 58.8 | 36.2 | 0 | 2.1 |
| 1495500 | Little Elk Creek at Childs, MD | 6.3 | 1.1 | 0 | 30.9 | 0 | 2.5 | 12.5 | 0.8 | 58.9 | 27.1 | 0.3 | 4.2 |
| 1496000 | Northeast River at Leslie, MD | 4.4 | 0.7 | 0 | 22.8 | 0 | 1.9 | 6.7 | 0.4 | 68.5 | 23.1 | 0 | 2.5 |
| 1496080 | Northeast River Tributary near Charlestown, MD | - | - | - | 94.3 | - | 1.5 | - | - | - | - | - | - |
| 1496200 | Principio Creek near Principio Furnace, MD | 2.9 | 0 | 0 | 14.8 | 0 | 1 | 4.4 | 0 | 78.6 | 17 | 0 | 1.2 |
| 1577940 | Broad Creek tributary at Whiteford, MD | 5.4 | 0.3 | 0 | 28 | 0 | 1.6 | 8.5 | 1.1 | 49.9 | 39.5 | 0 | 3 |
| 1578500 | Octoraro Creek near Rising Sun, MD | 5.2 | 0.6 | 0 | 33.6 | 0.2 | 1.9 | 10.3 | 0.6 | 59.3 | 31.7 | 0.3 | 3.5 |
| 1578800 | Basin Run at West Nottingham, MD | - | - | - | 15.3 | - | 2.5 | - | - | - | - | - | - |
| 1579000 | Basin Run at Liberty Grove, MD | - | - | - | 18.9 | - | 2.9 | - | - | - | - | - | - |
| 1580000 | Deer Creek at Rocks, MD | 2.6 | 0.3 | 0 | 35.8 | 0 | 1 | 6.4 | 0.5 | 58.1 | 34.3 | 0.1 | 2.4 |
| 1580200 | Deer Creek at Kalmia, MD | 3.2 | 0.3 | 0 | 34.7 | 0 | 1.2 | 7.2 | 0.5 | 58 | 33.5 | 0 | 2.6 |
| 1581500 | Bynum Run at Bel Air, MD | 20.5 | 6.3 | 0 | 22.3 | 0 | 12.9 | 31.7 | 7.8 | 34.7 | 18.4 | 0.2 | 19.6 |
| 1581700 | Winter Run near Benson, MD | 14.2 | 0.7 | 0 | 29.3 | 0 | 4.6 | 19 | 0.4 | 49.1 | 27.6 | 0 | 6.4 |
| 1581752◆ | Plumtree Creek near Bel Air, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1581830◆* | Grave Run near Beckleysville, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1581870◆ | Georges Run near Beckleysville, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1581940◆ | Mingo Branch near Hereford, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1581960◆ | Beetree Run at Bentley Springs, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1582000 | Little Falls at Blue Mount, MD | 4.5 | 0.2 | 0 | 41 | 0 | 1.3 | 7.6 | 0.2 | 51.7 | 39.4 | 0 | 2.6 |
| 1582510 | Piney Creek near Hereford, MD | 9.7 | 0 | 0 | 31.2 | 0 | 2.4 | 10.8 | 0 | 54.2 | 35 | 0 | 3.3 |
| 1583000* | Slade Run near Glyndon, MD | 3.3 | 0.4 | 0 | 46.2 | 0 | 1.2 | 5.9 | 0.2 | 50 | 42.9 | 0 | 2.5 |
| 1583100 | Piney Run at Dover, MD | 4.8 | 0.8 | 0 | 29.1 | 0.1 | 1.9 | 3.7 | 0.4 | 62.5 | 30.4 | 0 | 1.9 |
| 1583495 | Western Run tributary at Western Run, MD | 0 | 0 | 0 | 27.5 | 0 | 0 | 0 | 0 | 97.8 | 2 | 0 | 0 |
| 1583500 | Western Run at Western Run, MD | 4.5 | 0.4 | 0 | 34 | 0 | 1.5 | 6.1 | 0.1 | 59.8 | 31.9 | 0 | 2.1 |
| 1583570◆* | Pond Branch at Oregon Ridge, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1583580 | Baisman Run at Broadmoor, MD | - | - | - | 75.3 | - | 4.5 | - | - | - | - | - | - |
| 1583600* | Beaverdam Run at Cockeyesville, MD | 21.4 | 11.9 | 0 | 34.4 | 0.1 | 18 | 26 | 11.3 | 24.3 | 28.4 | 0.3 | 18.9 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1494000 | Southeast Creek at Church Hill, MD | 1.2 | 0.3 | 74.9 | 22.5 | 0.2 | 0.9 | - | - | - | - | - | - |
| 1495000 | Big Elk Creek at Elk Mills, MD | 5.8 | 0.4 | 58.4 | 35.4 | 0 | 2.5 | 0 | 35.2 | 2.7 | 0 | 39.2 | 3.1 |
| 1495500 | Little Elk Creek at Childs, MD | 18.7 | 1.1 | 53.4 | 24.9 | 0.2 | 6.3 | - | - | - | - | - | - |
| 1496000 | Northeast River at Leslie, MD | 7.7 | 0.5 | 66.4 | 22.6 | 0.1 | 3.2 | - | - | - | - | - | - |
| 1496080 | Northeast River Tributary near Charlestown, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1496200 | Principio Creek near Principio Furnace, MD | 9.7 | 0.1 | 73.5 | 16.4 | 0 | 2.8 | - | - | - | - | - | - |
| 1577940 | Broad Creek tributary at Whiteford, MD | 10.4 | 1.2 | 49 | 38.3 | 0 | 3.8 | - | - | - | - | - | - |
| 1578500 | Octoraro Creek near Rising Sun, MD | 14.2 | 1.7 | 54.6 | 29.7 | 0.3 | 5.5 | - | - | - | - | - | - |
| 1578800 | Basin Run at West Nottingham, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1579000 | Basin Run at Liberty Grove, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1580000 | Deer Creek at Rocks, MD | 8.8 | 0.3 | 56.1 | 34 | 0.1 | 2.7 | 0.1 | 34.2 | 2.8 | 0.1 | 34.2 | 3.2 |
| 1580200 | Deer Creek at Kalmia, MD | 10.2 | 0.4 | 55.4 | 32.2 | 0 | 3.1 | - | - | - | - | - | - |
| 1581500 | Bynum Run at Bel Air, MD | 38.1 | 8.1 | 29.1 | 17.9 | 0.2 | 23.6 | 0 | 16 | 26.6 | 0 | 15.3 | 27.6 |
| 1581700 | Winter Run near Benson, MD | 25.4 | 0.8 | 45.8 | 27.1 | 0 | 8.1 | 0 | 25.8 | 8.7 | 0 | 25.5 | 9.5 |
| 1581752◆ | Plumtree Creek near Bel Air, MD | - | - | - | 15.3 | - | 29.1 | 0 | 14.1 | 31.8 | 0 | 12.9 | 31.5 |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | - | - | - | 30.2 | - | 3.9 | 0 | 31 | 4.6 | 0 | 30.7 | 4.7 |
| 1581830◆* | Grave Run near Beckleysville, MD | - | - | - | 35.5 | - | 2.9 | 0 | 34.6 | 3.2 | 0 | 34 | 3.5 |
| 1581870◆ | Georges Run near Beckleysville, MD | - | - | - | 19.7 | - | 5.3 | 0 | 19 | 5.9 | 0 | 18.8 | 6.3 |
| 1581940◆ | Mingo Branch near Hereford, MD | - | - | - | 76.9 | - | 2 | 0 | 75.4 | 2 | 0 | 74.1 | 2.5 |
| 1581960◆ | Beetree Run at Bentley Springs, MD | - | - | - | 43.8 | - | 3.9 | 0 | 43.6 | 4 | 0 | 43.1 | 4.3 |
| 1582000 | Little Falls at Blue Mount, MD | 10.4 | 0.4 | 49.5 | 38.8 | 0 | 3.3 | 0.1 | 41.1 | 3.4 | 0.1 | 39.7 | 4 |
| 1582510 | Piney Creek near Hereford, MD | 13.6 | 0 | 54.2 | 32.1 | 0 | 3.4 | - | - | - | - | - | - |
| 1583000* | Slade Run near Glyndon, MD | 4.5 | 0.9 | 51.1 | 43.3 | 0 | 2.5 | 0 | 45.2 | 2.9 | 0 | 44.8 | 3.3 |
| 1583100 | Piney Run at Dover, MD | 6.3 | 0.4 | 59.5 | 29.4 | 0 | 3.4 | 0 | 31.2 | 3.4 | 0 | 30.8 | 3.8 |
| 1583495 | Western Run tributary at Western Run, MD | 11 | 0 | 86.7 | 2.3 | 0 | 2.7 | - | - | - | - | - | - |
| 1583500 | Western Run at Western Run, MD | 8.3 | 0.2 | 58.7 | 31.7 | 0 | 2.7 | 0.1 | 32.8 | 3 | 0.1 | 32.5 | 3.4 |
| 1583570◆* | Pond Branch at Oregon Ridge, MD | - | - | - | 100 | - | 0 | 0 | 100 | 0 | 0 | 100 | 0 |
| 1583580 | Baisman Run at Broadmoor, MD | - | - | - | 64.5 | - | 8.4 | 0 | 64.4 | 8.4 | 0 | 61.5 | 9 |
| 1583600* | Beaverdam Run at Cockeysville, MD | 33.5 | 11.2 | 19.7 | 26.2 | 0.1 | 22 | 0.2 | 25.1 | 23.3 | 0.1 | 23.5 | 24.5 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|--|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1494000 | Southeast Creek at Church Hill, MD | - | - | - | 77.5 | 80.1 | 2.4 | 51.8 | 26.7 | 19.1 | E |
| 1495000 | Big Elk Creek at Elk Mills, MD | 0 | 8.5 | 0.8 | 73.6 | 72.9 | 0 | 76 | 10.3 | 13.4 | P |
| 1495500 | Little Elk Creek at Childs, MD | - | - | - | 75 | 75 | 0 | 65.2 | 22 | 12.6 | P |
| 1496000 | Northeast River at Leslie, MD | - | - | - | 75.3 | 76.4 | 0 | 54.6 | 27.5 | 17.6 | P |
| 1496080 | Northeast River Tributary near Charlestown, MD | - | - | - | - | - | 0 | 31 | 60.6 | 8.4 | P |
| 1496200 | Principio Creek near Principio Furnace, MD | - | - | - | 75.8 | 78 | 0 | 68.6 | 19.7 | 11.6 | P |
| 1577940 | Broad Creek tributary at Whiteford, MD | - | - | - | 67.5 | 70.5 | 4.7 | 85 | 10.3 | 0 | P |
| 1578500 | Octoraro Creek near Rising Sun, MD | - | - | - | 73.5 | 76.8 | 0 | 60.4 | 28.2 | 10.4 | P |
| 1578800 | Basin Run at West Nottingham, MD | - | - | - | - | - | 0 | 71.5 | 15.5 | 12.9 | P |
| 1579000 | Basin Run at Liberty Grove, MD | - | - | - | - | - | 0 | 71.9 | 15.1 | 13 | P |
| 1580000 | Deer Creek at Rocks, MD | 0.1 | 25.8 | 3.9 | 70.7 | 72.1 | 2.7 | 82.1 | 12.4 | 2.5 | P |
| 1580200 | Deer Creek at Kalmia, MD | - | - | - | 71.3 | 72.6 | 2.4 | 78.9 | 15.2 | 3.2 | P |
| 1581500 | Bynum Run at Bel Air, MD | 0 | 14.8 | 33.4 | 77.8 | 78.7 | 0.2 | 39.9 | 35.6 | 24.2 | P |
| 1581700 | Winter Run near Benson, MD | 0 | 25.9 | 13 | 72.7 | 73.1 | 0.7 | 76.8 | 16.5 | 5.8 | P |
| 1581752◆ | Plumtree Creek near Bel Air, MD | 0 | 5.2 | 42.9 | - | - | 1.7 | 66.4 | 18.4 | 13.5 | P |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | 0.2 | 25.7 | 4.9 | - | - | 31.7 | 54.7 | 7.7 | 5.9 | P |
| 1581830◆* | Grave Run near Beckleysville, MD | 0.2 | 35.5 | 5.4 | - | - | 27.5 | 59.9 | 5.3 | 7.2 | P |
| 1581870◆ | Georges Run near Beckleysville, MD | 0.2 | 19.8 | 7.8 | - | - | 14.3 | 69.1 | 8.7 | 7.7 | P |
| 1581940◆ | Mingo Branch near Hereford, MD | 0 | 73.1 | 3.9 | - | - | 23.2 | 72.1 | 4.7 | 0 | P |
| 1581960◆ | Beetree Run at Bentley Springs, MD | 0 | 35.4 | 4.8 | - | - | 3.4 | 78.8 | 16.8 | 1 | P |
| 1582000 | Little Falls at Blue Mount, MD | 0.1 | 38.3 | 5.3 | 70.6 | 71 | 2.6 | 83.4 | 11.2 | 2.6 | P |
| 1582510 | Piney Creek near Hereford, MD | - | - | - | 71.5 | 72.1 | 0.2 | 81.2 | 16.8 | 1.8 | P |
| 1583000* | Slade Run near Glyndon, MD | 0 | 44.9 | 4.3 | 67.7 | 70 | 0 | 87.9 | 10.9 | 1.2 | P |
| 1583100 | Piney Run at Dover, MD | 0 | 30.8 | 4.7 | 71.4 | 73.3 | 2.4 | 85.1 | 9.4 | 3.1 | P |
| 1583495 | Western Run tributary at Western Run, MD | - | - | - | 75 | 77.7 | 0 | 77.4 | 18.2 | 4 | P |
| 1583500 | Western Run at Western Run, MD | 0.1 | 33.7 | 4.4 | 71.2 | 72.8 | 1.6 | 83.6 | 10.1 | 4.6 | P |
| 1583570◆* | Pond Branch at Oregon Ridge, MD | 0 | 100 | 0 | - | - | 2.4 | 59.2 | 38.5 | 0 | P |
| 1583580 | Baisman Run at Broadmoor, MD | 0 | 62.1 | 10.4 | - | - | 4.9 | 73.6 | 20.4 | 1.1 | P |
| 1583600* | Beaverdam Run at Cockeyesville, MD | 0.1 | 23.7 | 27.5 | 72.8 | 74 | 4.1 | 69.3 | 18.5 | 7.8 | P |

◆ New gaging station added since 2010 analysis.


* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 3)

| Stations (USGS Numbers) | Pages in Appendix |
|--------------------------------|--------------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

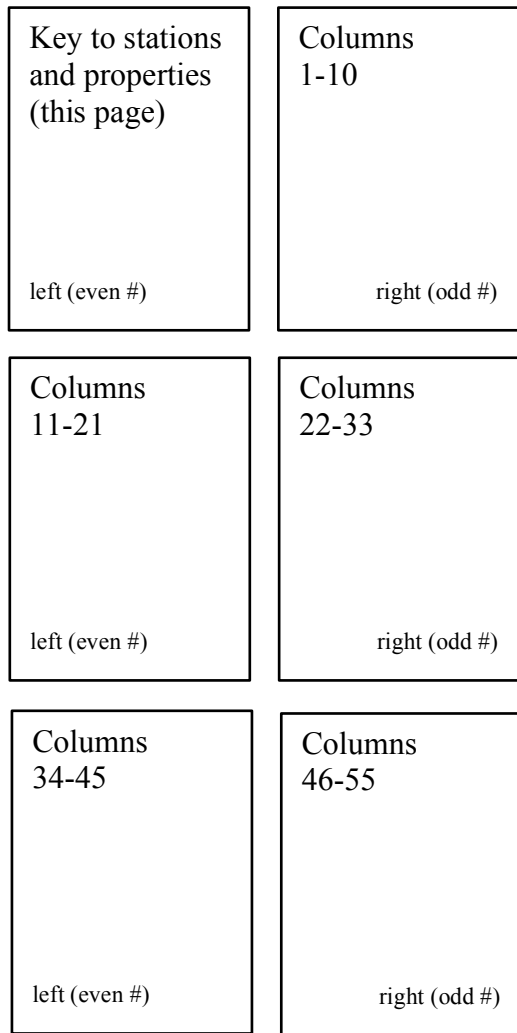

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|---|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 158397967◆ | Minebank Run near Glen Arm, MD | 11 | 2.1 | - | - | 100.8 | 0.091 | - | 0 | - | - |
| 1584050 | Long Green Creek at Glen Arm, MD | 37 | 9.31 | 19.4 | 5.4 | 55.9 | 0.065 | 167 | 0 | 0 | 0.47 |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 72 | 36.04 | 48.2 | 15.5 | 21.8 | 0.071 | 251.5 | 0 | 0 | 0.5 |
| 1585090◆ | Whitemarsh Run near Fullerton, MD | 18 | 2.58 | - | - | 81.9 | 0.06888 | - | 0 | - | - |
| 1585095◆ | North Fork Whitemarsh Run near White Marsh, MD | 17 | 1.36 | - | - | 85.5 | 0.049 | - | 0 | - | - |
| 1585100 | White Marsh Run at White Marsh, MD | 40 | 7.56 | 23 | 6.7 | 54.4 | 0.061 | 159.8 | 0 | 0 | 0.38 |
| 1585104◆ | Honeygo Run near White Marsh, MD | 13 | 2.44 | - | - | 72.1 | 0.054 | - | 0 | - | - |
| 1585200 | West Branch Herring Run at Idlewylde, MD | 46 | 2.31 | 8.8 | 2.5 | 63.1 | 0.059 | 127.9 | 0 | 0 | 0.6 |
| 1585225◆ | Moore Run tributary near Todd Ave at Baltimore, MD | 16 | 0.14 | - | - | 155.4 | 0.051 | - | 0 | - | - |
| 1585230◆ | Moore Run at Radecke Ave at Baltimore, MD | 16 | 3.5 | - | - | 82.1 | 0.045 | - | 0 | - | - |
| 1585300 | Stemmers Run at Rossville, MD | 29 | 4.52 | 15.1 | 5.4 | 63.1 | 0.06403 | 167.2 | 0 | 0 | 0.46 |
| 1585400 | Brien Run at Stemmers Run, MD | 29 | 1.94 | 8.3 | 2.3 | 37 | 0.03603 | 62.3 | 0 | 0 | 0.38 |
| 1585500 | Cranberry Branch near Westminster, MD | 64 | 3.26 | 12 | 4.1 | 41 | 0.081 | 164.9 | 0 | 0 | 0.46 |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 67 | 55.48 | 48.8 | 16.2 | 27.9 | 0.081 | 340.1 | 3.1 | 0 | 0.49 |
| 1586210* | Beaver Run near Finksburg, MD | 30 | 14.11 | 25.9 | 10.1 | 45 | 0.079 | 297.5 | 0 | 0 | 0.57 |
| 1586610 | Morgan Run near Louisville, MD | 30 | 28.01 | 38 | 10.7 | 35.3 | 0.089 | 285.6 | 0.1 | 0 | 0.54 |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | 24 | 164.23 | 95.3 | 51.9 | 6.1 | 0.09138 | 413.3 | 1.74 | 0 | 0.48 |
| 1587050 | Hay Meadow Branch tributary at Poplar | 11 | 0.49 | 4.1 | 1.1 | 136.4 | 0.08716 | 82.4 | 0 | 0 | 0.52 |
| 1587500 | South Branch Patapsco River at Henryton, MD | 32 | 64.26 | 66.8 | 19.7 | 24 | 0.09709 | 349.9 | 0 | 0 | 0.55 |
| 1588000 | Piney Run near Sykesville, MD | 43 | 11.4 | 26.6 | 8.6 | 39.6 | 0.07545 | 216.8 | 0 | 0 | 0.49 |
| 1589000 | Patapsco River at Hollofield, MD | 23 | 284.71 | 138 | 63.7 | 7.4 | 0.09301 | 475.6 | 0 | 0 | 0.49 |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 47 | 2.47 | 10.5 | 3.6 | 94.8 | 0.054 | 116.2 | 0 | 0 | 0.33 |
| 1589180◆ | Gwynns Falls at Glyndon, MD | 14 | 0.31 | - | - | 71.6 | 0.026 | - | 0 | - | - |
| 1589197◆ | Gwynns Falls near Delight, MD | 14 | 4.09 | - | - | 35.6 | 0.049 | - | 0 | - | - |
| 1589200 | Gwynns Falls near Owings Mills, MD | 17 | 4.89 | 14 | 4.7 | 34.2 | 0.05587 | 131.4 | 0 | 0 | 0.58 |
| 1589238◆* | Gwynns Falls tributary at McDonough, MD | 13 | 0.027 | - | - | 226.9 | 0.056 | - | 0 | - | - |
| 1589240 | Gwynns Falls at McDonough, MD | 12 | 19.27 | 28 | 9.6 | 28.8 | 0.06318 | 180.8 | 0 | 0 | 0.56 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|---|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 158397967◆ | Minebank Run near Glen Arm, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1584050 | Long Green Creek at Glen Arm, MD | 9 | 20.8 | 100 | 313.5 | 785.7 | 4 | 1.7 | 80.1 | 14.2 | 0 | 2.9 |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 14 | 60.8 | 100 | 320.4 | 803.2 | 2.9 | 0 | 74.8 | 22 | 0 | 1.1 |
| 1585090◆ | Whitemarsh Run near Fullerton, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1585095◆ | North Fork Whitemarsh Run near White Marsh, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1585100 | White Marsh Run at White Marsh, MD | 4 | 13.9 | 100 | 323 | 809.5 | 27.5 | 9.4 | 19.2 | 29.8 | 0.7 | 18.9 |
| 1585104◆ | Honeygo Run near White Marsh, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1585200 | West Branch Herring Run at Idlewyde, MD | 2 | 4.2 | 100 | 330 | 827 | 73.9 | 16 | 0 | 0 | 0 | 41.4 |
| 1585225◆ | Moores Run tributary near Todd Ave at Baltimore, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1585230◆ | Moores Run at Radecke Ave at Baltimore, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1585300 | Stemmers Run at Rossville, MD | 3 | 7 | 100 | 330 | 827 | 35.3 | 17.9 | 25 | 15.6 | 0 | 30.4 |
| 1585400 | Brien Run at Stemmers Run, MD | 1 | 1.7 | 100 | 330 | 827 | 26.5 | 24.7 | 7.9 | 18.6 | 0 | 31.1 |
| 1585500 | Cranberry Branch near Westminster, MD | 1 | 3.8 | 100 | 328 | 822 | 2.4 | 0 | 75 | 21.7 | 0.8 | 0.9 |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 19 | 84.3 | 100 | 328 | 822 | 2.9 | 1.9 | 74.3 | 20.5 | 0.1 | 2.6 |
| 1586210* | Beaver Run near Finksburg, MD | 6 | 25.6 | 100 | 328 | 822 | 5.5 | 1.2 | 74 | 18.8 | 0 | 3.1 |
| 1586610 | Morgan Run near Louisville, MD | 20 | 56.6 | 100 | 326.4 | 818.2 | 1.1 | 0.3 | 77.1 | 21.1 | 0 | 0.7 |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | 80 | 302.6 | 100 | 324.9 | 814.2 | 3.3 | 0.9 | 66.2 | 26.6 | 2.6 | 2 |
| 1587050 | Hay Meadow Branch tributary at Poplar Springs, | 1 | 1.1 | 100 | 310.3 | 778.5 | 0 | 0.6 | 99.4 | 0 | 0 | 0.6 |
| 1587500 | South Branch Patapsco River at Henryton, MD | 36 | 125.4 | 100 | 310.8 | 780 | 2.9 | 1.2 | 75.3 | 20.6 | 0 | 2.2 |
| 1588000 | Piney Run near Sykesville, MD | 5 | 21.2 | 100 | 312.9 | 784.9 | 2.7 | 0.5 | 84.7 | 10.2 | 1.9 | 1.5 |
| 1589000 | Patapsco River at Hollofield, MD | 145 | 533.9 | 100 | 319.2 | 800.3 | 3.9 | 1.1 | 65.9 | 27 | 1.6 | 2.4 |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 1 | 3.9 | 100 | 331.5 | 852.6 | 48.5 | 33.9 | 0.2 | 9.9 | 0 | 49.3 |
| 1589180◆ | Gwynns Falls at Glyndon, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1589197◆ | Gwynns Falls near Delight, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1589200 | Gwynns Falls near Owings Mills, MD | 2 | 7.1 | 100 | 313.8 | 786.4 | 31.4 | 4.3 | 49.1 | 11.9 | 0 | 15.5 |
| 1589238◆* | Gwynns Falls tributary at McDonough, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1589240 | Gwynns Falls at McDonough, MD | 8 | 33.1 | 100 | 312.4 | 783.1 | 21.5 | 7.2 | 40 | 28.6 | 0 | 14.2 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com85 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 158397967◆ | Minebank Run near Glen Arm, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1584050 | Long Green Creek at Glen Arm, MD | 11.8 | 3.2 | 0 | 19.7 | 0 | 5.6 | 12.9 | 0.9 | 67.2 | 18.3 | 0 | 5.8 |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 11.1 | 0.9 | 0 | 28.2 | 0 | 3.5 | 14.5 | 0.2 | 56.4 | 28.3 | 0 | 4.3 |
| 1585090◆ | Whitemarsh Run near Fullerton, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1585095◆ | North Fork Whitemarsh Run near White Marsh, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1585100 | White Marsh Run at White Marsh, MD | 38.5 | 7.2 | 0 | 26.5 | 0 | 21.6 | 44.6 | 8.3 | 10.2 | 23.6 | 0 | 25.8 |
| 1585104◆ | Honeygo Run near White Marsh, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1585200 | West Branch Herring Run at Idlewyde, MD | 66.3 | 10.5 | 0 | 7 | 0 | 37.5 | 65.8 | 9.8 | 0 | 7.2 | 0 | 37.8 |
| 1585225◆ | Moore's Run tributary near Todd Ave at Baltimore, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1585230◆ | Moore's Run at Radecke Ave at Baltimore, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1585300 | Stemmers Run at Rossville, MD | 41.4 | 9.5 | 0 | 29.9 | 0 | 25.3 | 42.4 | 9.1 | 9.2 | 28.3 | 0 | 25.4 |
| 1585400 | Brien Run at Stemmers Run, MD | 32.5 | 27.2 | 0 | 21.4 | 0 | 36.8 | 33.5 | 25.4 | 2.8 | 25.2 | 0 | 39.4 |
| 1585500 | Cranberry Branch near Westminster, MD | 10.9 | 1.8 | 0 | 19.5 | 1.2 | 4.2 | 18.5 | 0.7 | 57.6 | 21.3 | 1.9 | 5.5 |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 11.3 | 2.9 | 0 | 23 | 0.3 | 5.4 | 13.6 | 3.5 | 57.9 | 23.3 | 0.3 | 6.6 |
| 1586210* | Beaver Run near Finksburg, MD | 14.2 | 2.3 | 0 | 26.6 | 0 | 6 | 18.4 | 1.8 | 52.1 | 26 | 0.1 | 7 |
| 1586610 | Morgan Run near Louisville, MD | 10.7 | 0.3 | 0 | 31.6 | 0 | 3 | 14 | 0.4 | 54.9 | 30.1 | 0 | 4 |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | 12.3 | 1.5 | 0 | 31.5 | 2.8 | 4.6 | 14.5 | 1.7 | 47.1 | 31.2 | 3.4 | 5.5 |
| 1587050 | Hay Meadow Branch tributary at Poplar | 26.2 | 4.3 | 0 | 5.9 | 0 | 10 | 29.7 | 3.5 | 60.5 | 6.3 | 0 | 10.3 |
| 1587500 | South Branch Patapsco River at Henryton, MD | 11.2 | 1.2 | 0 | 31.4 | 0.1 | 4 | 13.7 | 0.8 | 53 | 29.8 | 0.1 | 4.7 |
| 1588000 | Piney Run near Sykesville, MD | 13.6 | 1 | 0 | 20.5 | 4 | 4.6 | 13.9 | 0.4 | 56.6 | 20.8 | 4 | 4.7 |
| 1589000 | Patapsco River at Hollofield, MD | 12.4 | 1.4 | 0 | 33.3 | 1.8 | 4.7 | 14.2 | 1.4 | 46.4 | 32.8 | 2.1 | 5.6 |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 45.4 | 17 | 0 | 24.5 | 0 | 33.8 | 44.8 | 21.8 | 0 | 21.4 | 0 | 39 |
| 1589180◆ | Gwynns Falls at Glyndon, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1589197◆ | Gwynns Falls near Delight, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1589200 | Gwynns Falls near Owings Mills, MD | 33.7 | 2.5 | 0 | 26.5 | 0 | 14.6 | 36.2 | 2.5 | 27.8 | 23.4 | 0 | 17.5 |
| 1589238◆* | Gwynns Falls tributary at McDonough, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1589240 | Gwynns Falls at McDonough, MD | 26 | 5.8 | 0 | 35.1 | 0 | 16.6 | 28.7 | 6.1 | 18.4 | 32.6 | 0 | 19.3 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 158397967◆ | Minebank Run near Glen Arm, MD | - | - | - | 23.6 | - | 33.6 | 0 | 19.2 | 36.6 | 0 | 18.3 | 37.4 |
| 1584050 | Long Green Creek at Glen Arm, MD | 15.5 | 1 | 64.5 | 18.5 | 0 | 5.7 | 0 | 17.7 | 5.3 | 0 | 17 | 6.2 |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 17.7 | 0.3 | 54.6 | 27.2 | 0 | 5 | 0 | 28.4 | 5.1 | 0 | 28.1 | 5.2 |
| 1585090◆ | Whitemarsh Run near Fullerton, MD | - | - | - | 13.1 | - | 43.2 | 0 | 13 | 43.2 | 0 | 11.7 | 44 |
| 1585095◆ | North Fork Whitemarsh Run near White Marsh, MD | - | - | - | 13.4 | - | 38.3 | 0 | 9.8 | 40.3 | 0 | 5.6 | 42.9 |
| 1585100 | White Marsh Run at White Marsh, MD | 52.1 | 13 | 6.9 | 18.6 | 0 | 37.7 | 0 | 16.6 | 38.9 | 0 | 15.8 | 40.9 |
| 1585104◆ | Honeygo Run near White Marsh, MD | - | - | - | 29.8 | - | 14.2 | 0 | 32.2 | 14.7 | 0 | 32.5 | 15.1 |
| 1585200 | West Branch Herring Run at Idlewylde, MD | 65 | 10 | 0 | 4.1 | 0 | 42.1 | 0 | 4.1 | 42.1 | 0 | 2.6 | 43.7 |
| 1585225◆ | Moore's Run tributary near Todd Ave at Baltimore, MD | - | - | - | 1.2 | - | 42 | 0 | 1.2 | 39.2 | 0 | 0.5 | 40.2 |
| 1585230◆ | Moore's Run at Radecke Ave at Baltimore, MD | - | - | - | 1.4 | - | 42.5 | 0 | 1.4 | 44.1 | 0 | 1.2 | 44 |
| 1585300 | Stemmers Run at Rossville, MD | 44.4 | 11.1 | 2.7 | 22 | 0 | 29.3 | - | - | - | - | - | - |
| 1585400 | Brien Run at Stemmers Run, MD | 34.4 | 33.9 | 2.1 | 20.2 | 0 | 45 | - | - | - | - | - | - |
| 1585500 | Cranberry Branch near Westminster, MD | 20.3 | 0.7 | 58.8 | 20.1 | 1.1 | 5.5 | 1.2 | 20.7 | 7.3 | 1.2 | 20.8 | 7.2 |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 17.9 | 4.1 | 51.5 | 24.8 | 0.2 | 8.5 | 0.2 | 23.3 | 9.1 | 0.2 | 23 | 9.8 |
| 1586210* | Beaver Run near Finksburg, MD | 26.1 | 2.1 | 42.4 | 27.1 | 0.1 | 10.1 | 0 | 22.3 | 11.9 | 0 | 21.5 | 12.3 |
| 1586610 | Morgan Run near Louisville, MD | 17.5 | 0.3 | 53.2 | 28.7 | 0 | 4.9 | 0 | 31.7 | 4.9 | 0 | 32.3 | 5 |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | 18.8 | 2.3 | 42.4 | 30.8 | 3.2 | 7.2 | - | - | - | - | - | - |
| 1587050 | Hay Meadow Branch tributary at Poplar | 33.5 | 1.5 | 53.1 | 6.9 | 0 | 10.9 | - | - | - | - | - | - |
| 1587500 | South Branch Patapsco River at Henryton, MD | 20.7 | 1.5 | 47.7 | 27.5 | 0 | 7.1 | - | - | - | - | - | - |
| 1588000 | Piney Run near Sykesville, MD | 22 | 0.5 | 48.8 | 19.8 | 4 | 6.9 | - | - | - | - | - | - |
| 1589000 | Patapsco River at Hollofield, MD | 19.4 | 1.9 | 41.5 | 31.7 | 2 | 7.4 | - | - | - | - | - | - |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 43 | 24.6 | 0 | 8.8 | 0 | 44.6 | 0 | 8.8 | 44.7 | 0.6 | 7.2 | 44.7 |
| 1589180◆ | Gwynns Falls at Glyndon, MD | - | - | - | 9.8 | - | 37.6 | 0 | 9.8 | 37.8 | 0 | 6.9 | 39.5 |
| 1589197◆ | Gwynns Falls near Delight, MD | - | - | - | 13.7 | - | 33.5 | 0 | 11.9 | 34.7 | 0 | 11.8 | 36.6 |
| 1589200 | Gwynns Falls near Owings Mills, MD | 55.9 | 6.8 | 14.7 | 16.5 | 0 | 26.7 | - | - | - | - | - | - |
| 1589238◆* | Gwynns Falls tributary at McDonough, MD | - | - | - | 8.9 | - | 0 | 0 | 16.5 | 0 | 0 | 5.1 | 0 |
| 1589240 | Gwynns Falls at McDonough, MD | 39.2 | 11.2 | 12.4 | 25.9 | 0.1 | 27.4 | - | - | - | - | - | - |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|--|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 158397967◆ | Minebank Run near Glen Arm, MD | 0 | 12.7 | 40.2 | - | - | 2 | 79.8 | 7.7 | 10.5 | P |
| 1584050 | Long Green Creek at Glen Arm, MD | 0 | 17.2 | 7 | 73.5 | 74.8 | 0.9 | 76.3 | 17 | 5.6 | P |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 0.1 | 28.5 | 6.8 | 71.7 | 72.1 | 1.1 | 79.7 | 14.4 | 4.8 | P |
| 1585090◆ | Whitemarsh Run near Fullerton, MD | 0 | 9.3 | 47.2 | - | - | 8.7 | 59.1 | 23.1 | 9 | P |
| 1585095◆ | North Fork Whitemarsh Run near White Marsh, MD | 0 | 6.3 | 42.3 | - | - | 2.2 | 28.9 | 55.6 | 13.1 | P |
| 1585100 | White Marsh Run at White Marsh, MD | 0 | 14.3 | 42.6 | 79.2 | 81.3 | 8.8 | 44.1 | 30.1 | 16.6 | P |
| 1585104◆ | Honeygo Run near White Marsh, MD | 0 | 28.6 | 22.5 | - | - | 3 | 47.4 | 32.2 | 17.2 | P |
| 1585200 | West Branch Herring Run at Idlewylde, MD | 0 | 2 | 43.2 | 78.5 | 78.9 | 9.5 | 68.1 | 12.3 | 10.1 | P |
| 1585225◆ | Moore's Run tributary near Todd Ave at Baltimore, MD | 0 | 0.5 | 41.1 | - | - | 0 | 66.9 | 8 | 25.1 | P |
| 1585230◆ | Moore's Run at Radecke Ave at Baltimore, MD | 0 | 1.8 | 45.4 | - | - | 1 | 50.1 | 30.6 | 18.4 | P |
| 1585300 | Stemmers Run at Rossville, MD | - | - | - | 80.3 | 78.5 | 3.9 | 58.7 | 24 | 13.4 | W/P |
| 1585400 | Brien Run at Stemmers Run, MD | - | - | - | 84.1 | 84.6 | 5.3 | 26 | 52 | 16.7 | W/P |
| 1585500 | Cranberry Branch near Westminster, MD | 1.5 | 23.4 | 7.5 | 72 | 73.5 | 29.1 | 54.6 | 10.5 | 4.8 | P |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 0.4 | 26.3 | 12.1 | 72.2 | 73.8 | 20.3 | 65.7 | 7.5 | 6.2 | P |
| 1586210* | Beaver Run near Finksburg, MD | 0.2 | 24.6 | 14.5 | 72.5 | 72.8 | 30.4 | 57.1 | 5.7 | 6.7 | P |
| 1586610 | Morgan Run near Louisville, MD | 0.2 | 35.9 | 6.7 | 69.6 | 70.1 | 49 | 38.5 | 6.8 | 5.5 | P |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | - | - | - | 72 | 72.7 | 22.4 | 61.7 | 8.2 | 4.9 | P |
| 1587050 | Hay Meadow Branch tributary at Poplar | - | - | - | 73.5 | 74 | 0 | 84.5 | 8.2 | 7.3 | P |
| 1587500 | South Branch Patapsco River at Henryton, MD | - | - | - | 68.7 | 68.7 | 24.9 | 59.2 | 8.5 | 7.2 | P |
| 1588000 | Piney Run near Sykesville, MD | - | - | - | 73.1 | 73.1 | 18.5 | 65 | 9.5 | 6.9 | P |
| 1589000 | Patapsco River at Hollofield, MD | - | - | - | 71 | 71.4 | 20.9 | 62.4 | 9.2 | 5.7 | P |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 0.7 | 7.9 | 47.9 | 83.1 | 82.5 | 4 | 76.6 | 9.8 | 9.4 | P |
| 1589180◆ | Gwynns Falls at Glyndon, MD | 0 | 15.8 | 42 | - | - | 0 | 75.6 | 14.4 | 10.1 | P |
| 1589197◆ | Gwynns Falls near Delight, MD | 0 | 11.8 | 37.7 | - | - | 0.1 | 61.1 | 31.3 | 7.5 | P |
| 1589200 | Gwynns Falls near Owings Mills, MD | - | - | - | 73.8 | 75.2 | 0 | 86.4 | 5.9 | 7.7 | P |
| 1589238◆* | Gwynns Falls tributary at McDonough, MD | 0 | 2.5 | 0 | - | - | 0 | 100 | 0 | 0 | P |
| 1589240 | Gwynns Falls at McDonough, MD | - | - | - | 72.6 | 75 | 0.4 | 67.5 | 26.4 | 5.6 | P |

◆ New gaging station added since 2010 analysis.


* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 4)

| Stations (USGS Numbers) | Pages in Appendix |
|-------------------------|-------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

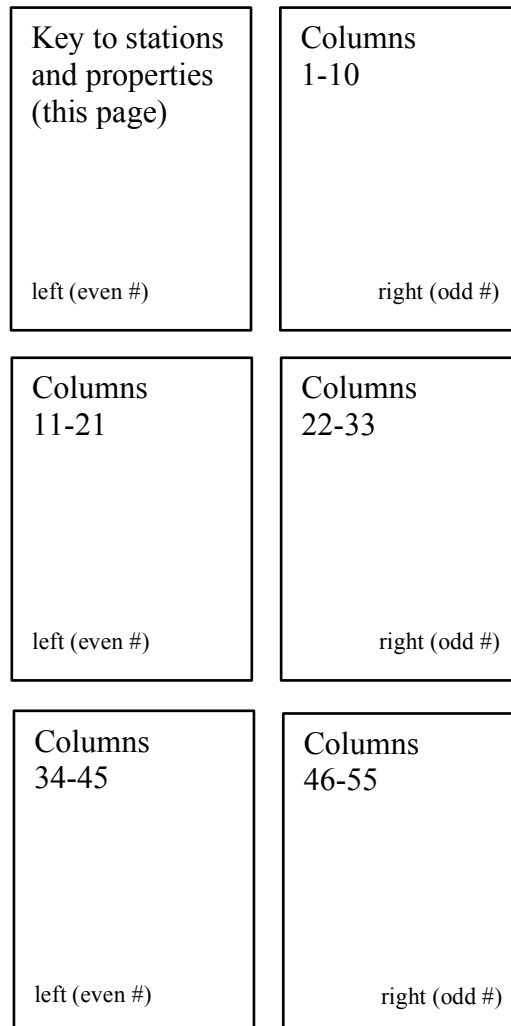

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|---|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1589300 | Gwynns Falls at Villa Nova, MD | 34 | 32.59 | 40 | 15.9 | 21.2 | 0.056 | 198.4 | 0 | 0 | 0.51 |
| 1589330 | Dead Run at Franklinton, MD | 31 | 5.52 | 16.7 | 3.9 | 44.8 | 0.047 | 122.2 | 0 | 0 | 0.48 |
| 1589352◆ | Gwynns Falls at Washington Blvd at Baltimore, MD | 14 | 63.57 | - | - | 26.1 | 0.057 | - | 0 | - | - |
| 1589440 | Jones Fall at Sorrento, MD | 47 | 25.21 | 32.3 | 10.6 | 32.3 | 0.078 | 237.5 | 0 | 0 | 0.49 |
| 1589464◆ | Stony Run at Ridgemedede Road at Baltimore, MD | 9 | 2.26 | - | - | 82.8 | 0.05 | - | 0 | - | - |
| 1589500 | Sawmill Creek at Glen Burnie, MD | 30 | 4.91 | 14.7 | 4.7 | 30.1 | 0.0275 | 75.5 | 0 | 0 | 0.4 |
| 1589795 | South Fork Jabez Branch at Millersville, MD | - | 1.01 | - | - | 44.8 | 0.04 | 82.3 | 0 | - | - |
| 1590000 | North River near Annapolis, MD | 42 | 8.93 | 23.7 | 6 | 24.4 | 0.08665 | 110.7 | 0 | 0 | 0.55 |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | 35 | 6.97 | 19.6 | 5.3 | 24.9 | 0.1103 | 115.1 | 0 | 0 | 0.57 |
| 1591000 | Patuxent River near Unity, MD | 68 | 34.95 | 46.3 | 13.2 | 29.8 | 0.092 | 259.7 | 0 | 0 | 0.46 |
| 1591400 | Cattail Creek near Glenwood, MD | 46 | 22.86 | 32.6 | 9.6 | 32.3 | 0.08 | 212.3 | 0 | 0 | 0.45 |
| 1591700 | Hawlings River near Sandy Spring, MD | 34 | 27.31 | 34.9 | 11.2 | 26.5 | 0.056 | 172.3 | 0 | 0 | 0.45 |
| 1592000* | Patuxent River near Burtonsville, MD | 32 | 127.03 | 91.7 | 30.8 | 12.9 | 0.09 | 314.9 | 0 | 0 | 0.44 |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | 11 | 1.06 | 6.2 | 2.2 | 66.5 | 0.05 | 90.8 | 0 | 0 | 0.41 |
| 1593500* | Little Patuxent River at Guilford, MD | 80 | 38.1 | 48.9 | 17.3 | 18.8 | 0.053 | 141.1 | 0 | 0 | 0.33 |
| 1594000 | Little Patuxent River at Savage, MD | 59 | 98.25 | 73.8 | 25 | 14 | 0.059 | 266.5 | 0 | 0 | 0.48 |
| 1594400 | Dorsey Run near Jessup, MD | 19 | 11.86 | 27.5 | 8.2 | 35.6 | 0.05176 | 140.4 | 0 | 0 | 0.37 |
| 1594440 | Patuxent River near Bowie, MD | 22 | 349.6 | 165 | 55.9 | 10.1 | 0.07366 | 371.6 | 0 | 0 | 0.41 |
| 1594445 | Mill Branch near Mitchellville, MD | 10 | 1.28 | 8.7 | 2.6 | 39.2 | 0.0277 | 46 | 0 | 0 | 0.41 |
| 1594500 | Western Branch near Largo, MD | 25 | 29.53 | 39.3 | 11.3 | 9.9 | 0.04571 | 103.9 | 0 | 0 | 0.47 |
| 1594526 | Western Branch at Upper Marlboro, MD | 10 | 89.08 | 71.1 | 20.3 | 6.2 | 0.05202 | 129 | 0 | 0 | 0.45 |
| 1594600 | Cocktown Creek near Huntington, MD | 19 | 3.79 | 12.3 | 3.3 | 22.4 | 0.08602 | 77.3 | 0 | 0 | 0.53 |
| 1594670 | Hunting Creek near Huntingtown, MD | 10 | 9.27 | 18.8 | 5.7 | 18.5 | 0.08937 | 96.3 | 0 | 0 | 0.58 |
| 1594710 | Killpeck Creek at Huntersville, MD | 12 | 3.27 | 13.1 | 4 | 39.4 | 0.06064 | 98.6 | 0 | 0 | 0.67 |
| 1594800 | St. Leonard Creek near St. Leonard, MD | 11 | 6.82 | 17.1 | 5.1 | 22.3 | 0.09602 | 101.9 | 0 | 0 | 0.6 |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 26 | 8.23 | 18.1 | 6.3 | 80.7 | 0.155 | 255.1 | 0 | 100 | 0.3 |
| 1594936 | North Fork Sand Run near Wilson, MD | 28 | 1.91 | 10.3 | 3.2 | 187.7 | 0.14094 | 277.4 | 0 | 100 | 0.38 |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 25 | 2.36 | 10.8 | 3.1 | 217.9 | 0.13 | 323.3 | 0 | 100 | 0.44 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|---|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1589300 | Gwynns Falls at Villa Nova, MD | 11 | 52 | 100 | 312.4 | 782.9 | 34.3 | 7.7 | 30.3 | 24.4 | 0 | 19.7 |
| 1589330 | Dead Run at Franklinton, MD | 4 | 11.6 | 100 | 322.5 | 819.8 | 36.5 | 33.1 | 16.2 | 9.2 | 0 | 43.1 |
| 1589352◆ | Gwynns Falls at Washington Blvd at Baltimore, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1589440 | Jones Fall at Sorrento, MD | 13 | 44 | 100 | 323.1 | 809.7 | 22.6 | 3.8 | 34.4 | 34.2 | 0 | 12.1 |
| 1589464◆ | Stony Run at Ridgemedede Road at Baltimore, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1589500 | Sawmill Creek at Glen Burnie, MD | 4 | 11.4 | 100 | 319 | 820 | 16 | 20.2 | 27.4 | 31.7 | 0 | 26 |
| 1589795 | South Fork Jabez Branch at Millersville, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1590000 | North River near Annapolis, MD | 4 | 14.4 | 100 | 339.2 | 871.2 | 5.3 | 0 | 30.1 | 64.6 | 0 | 2 |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | 4 | 14.3 | 100 | 328.7 | 844 | 5.6 | 2.8 | 28.1 | 63.5 | 0 | 4.5 |
| 1591000 | Patuxent River near Unity, MD | 16 | 67.7 | 100 | 315.3 | 790.7 | 1 | 0.1 | 77.7 | 21.2 | 0 | 0.4 |
| 1591400 | Cattail Creek near Glenwood, MD | 14 | 46.9 | 100 | 321.2 | 806.2 | 0.4 | 1.9 | 81.3 | 16.2 | 0.1 | 2 |
| 1591700 | Hawlings River near Sandy Spring, MD | 11 | 42.2 | 100 | 324.6 | 815.3 | 6.4 | 0.5 | 73 | 19 | 0.1 | 2.8 |
| 1592000* | Patuxent River near Burtonsville, MD | 63 | 234 | 100 | 321.6 | 808.5 | 3.8 | 0.5 | 70.2 | 23.7 | 1.4 | 1.9 |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | 1 | 2.2 | 100 | 323 | 810 | 56.2 | 17.3 | 12.3 | 13.5 | 0 | 36.2 |
| 1593500* | Little Patuxent River at Guilford, MD | 25 | 79.6 | 100 | 320.1 | 803.7 | 29.5 | 6.5 | 37.2 | 17.9 | 0.3 | 16.9 |
| 1594000 | Little Patuxent River at Savage, MD | 56 | 191.5 | 100 | 321.9 | 809.3 | 14.4 | 3.9 | 51.4 | 25.3 | 0.1 | 9 |
| 1594400 | Dorsey Run near Jessup, MD | 3 | 15.3 | 100 | 367.7 | 943.6 | 10.5 | 20.6 | 27.3 | 33.4 | 0 | 22 |
| 1594440 | Patuxent River near Bowie, MD | 249 | 693.8 | 100 | 333.4 | 845.3 | 10.8 | 6.3 | 45.5 | 31.2 | 2.7 | 9.6 |
| 1594445 | Mill Branch near Mitchellville, MD | 1 | 2.5 | 100 | 348.4 | 895.6 | 7 | 0.1 | 77.9 | 3.7 | 0 | 2.7 |
| 1594500 | Western Branch near Largo, MD | 7 | 41.4 | 100 | 338 | 869.1 | 26 | 5.8 | 32.5 | 31.1 | 0 | 15.1 |
| 1594526 | Western Branch at Upper Marlboro, MD | 33 | 142.7 | 100 | 318.8 | 819.5 | 20.2 | 6.4 | 38.9 | 30.5 | 0 | 13.5 |
| 1594600 | Cocktown Creek near Huntington, MD | 2 | 5.6 | 98.4 | 323.3 | 831.7 | 56.9 | 0 | 11.9 | 31.2 | 0 | 21.6 |
| 1594670 | Hunting Creek near Huntingtown, MD | 3 | 13.9 | 100 | 364 | 936 | 16.1 | 1.5 | 10.6 | 70.9 | 0 | 7.4 |
| 1594710 | Killpeck Creek at Huntersville, MD | 2 | 5.9 | 100 | 339 | 872 | 23.6 | 12.1 | 10.3 | 54.1 | 0 | 19.2 |
| 1594800 | St. Leonard Creek near St. Leonard, MD | 5 | 16 | 100 | 364 | 936 | 7.9 | 0.4 | 10.2 | 81.6 | 0 | 3.3 |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 2 | 8.6 | 88.2 | 258 | 604 | 0 | 0 | 7.9 | 85.4 | 0 | 0 |
| 1594936 | North Fork Sand Run near Wilson, MD | 1 | 3 | 100 | 258 | 604 | 0 | 0 | 9.4 | 86.5 | 0 | 0 |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 2 | 3.6 | 100 | 258 | 604 | 0 | 0 | 17.1 | 82.9 | 0 | 0 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com8 5 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|---|-----------|------------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1589300 | Gwynns Falls at Villa Nova, MD | 37.1 | 5.2 | 0 | 30.7 | 0 | 19.5 | 38.5 | 5.6 | 14.1 | 28.5 | 0 | 21.6 |
| 1589330 | Dead Run at Franklinton, MD | 41.6 | 25.6 | 0 | 8.4 | 0 | 41.1 | 47.7 | 26.1 | 5.5 | 3.1 | 0 | 43.8 |
| 1589352◆ | Gwynns Falls at Washington Blvd at Baltimore, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1589440 | Jones Fall at Sorrento, MD | 33.3 | 0.5 | 0 | 35.9 | 0 | 11.4 | 38.7 | 0.5 | 21.6 | 30.6 | 0 | 13.7 |
| 1589464◆ | Stony Run at Ridgemedede Road at Baltimore, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1589500 | Sawmill Creek at Glen Burnie, MD | 13.6 | 5.4 | 0 | 47.1 | 0 | 11.5 | 23.3 | 18.1 | 9.3 | 43.9 | 0 | 23.5 |
| 1589795 | South Fork Jabez Branch at Millersville, MD | - | - | - | - | - | 8.2 | - | - | - | - | - | - |
| 1590000 | North River near Annapolis, MD | 9.8 | 0 | 0 | 60.3 | 0 | 2.7 | 11.3 | 0 | 28.5 | 58.6 | 0 | 3 |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | 5.8 | 0.4 | 0 | 66.1 | 0 | 1.5 | 6 | 0.6 | 26.8 | 62.6 | 0 | 3.7 |
| 1591000 | Patuxent River near Unity, MD | 4.9 | 0.1 | 0 | 33.3 | 0 | 1.4 | 6.6 | 0.1 | 56.1 | 33.1 | 0 | 2.1 |
| 1591400 | Cattail Creek near Glenwood, MD | 8.4 | 0.8 | 0 | 26.1 | 0 | 2.9 | 10.5 | 0.2 | 61.1 | 26.1 | 0 | 3 |
| 1591700 | Hawlings River near Sandy Spring, MD | 9.2 | 0.8 | 0 | 27 | 0.1 | 3.8 | 15.5 | 2 | 48.6 | 25.3 | 0.1 | 8.9 |
| 1592000* | Patuxent River near Burtonsville, MD | 9.7 | 0.5 | 0 | 32 | 1.8 | 3.1 | 14.1 | 0.6 | 48.4 | 30.8 | 1.8 | 5.1 |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | 68 | 13.2 | 0 | 5.4 | 0 | 34.8 | 69.2 | 9.4 | 6.7 | 5.1 | 0 | 32.5 |
| 1593500* | Little Patuxent River at Guilford, MD | 38.5 | 5.6 | 0 | 20.4 | 0.5 | 18.5 | 41.5 | 6.3 | 19.6 | 18.4 | 0.6 | 21.7 |
| 1594000 | Little Patuxent River at Savage, MD | 23.7 | 3.5 | 0 | 28.6 | 0.2 | 11 | 28.4 | 3.4 | 32 | 27.3 | 0.3 | 13.3 |
| 1594400 | Dorsey Run near Jessup, MD | 9.2 | 14.8 | 0 | 47.6 | 0 | 16.7 | 9.5 | 15.9 | 12.9 | 42.8 | 0 | 19.6 |
| 1594440 | Patuxent River near Bowie, MD | 16.3 | 2.9 | 0 | 38.7 | 1 | 8.6 | 19.5 | 3.1 | 30.7 | 37 | 1.1 | 10.7 |
| 1594445 | Mill Branch near Mitchellville, MD | 9.5 | 1.7 | 0 | 18.1 | 0 | 4.5 | 12.3 | 2.4 | 51.2 | 15.6 | 0 | 8 |
| 1594500 | Western Branch near Largo, MD | 22.6 | 3.9 | 0 | 41.6 | 0.3 | 11.4 | 26 | 4.2 | 23.6 | 37.6 | 0.8 | 13.8 |
| 1594526 | Western Branch at Upper Marlboro, MD | 16.4 | 3.9 | 0 | 43.9 | 0.2 | 9.5 | 18.8 | 4.1 | 29 | 40.5 | 0.4 | 11.8 |
| 1594600 | Cocktown Creek near Huntington, MD | 26.8 | 2.5 | 0 | 52.7 | 0 | 8.7 | 28.4 | 2.3 | 20.9 | 48.3 | 0 | 9 |
| 1594670 | Hunting Creek near Huntingtown, MD | 2.3 | 0.5 | 0 | 76.6 | 0 | 1.5 | 4.6 | 0.6 | 20 | 73.4 | 0 | 2.4 |
| 1594710 | Killpeck Creek at Huntersville, MD | 2 | 2.8 | 0 | 68.6 | 0 | 4.1 | 9.2 | 4.5 | 21.4 | 60.4 | 0 | 7.8 |
| 1594800 | St. Leonard Creek near St. Leonard, MD | 0.4 | 0 | 0 | 77.8 | 0 | 0.3 | 5.7 | 0.2 | 16.4 | 73.1 | 0 | 1.7 |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 0 | 0 | 0 | 72.6 | 0 | 1.3 | 0 | 0 | 7.6 | 80.8 | 0 | 1.4 |
| 1594936 | North Fork Sand Run near Wilson, MD | 0 | 0 | 0 | 78.6 | 0 | 0.9 | 0 | 0 | 12.9 | 79.3 | 0 | 0.9 |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 0 | 0 | 0 | 76 | 0 | 0.6 | 0 | 0 | 18.9 | 77.7 | 0 | 0.4 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|---|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1589300 | Gwynns Falls at Villa Nova, MD | 46.5 | 9.3 | 9 | 25.1 | 0.1 | 30 | 0.2 | 23.8 | 31 | 0.2 | 22.8 | 32.7 |
| 1589330 | Dead Run at Franklinton, MD | 41.3 | 24.9 | 3 | 9.1 | 0 | 45.4 | 0 | 7.1 | 46 | 0 | 7.6 | 49.3 |
| 1589352◆ | Gwynns Falls at Washington Blvd at Baltimore, MD | - | - | - | 19 | - | 37.6 | 0.4 | 17.7 | 38.3 | 0.4 | 17.4 | 39.3 |
| 1589440 | Jones Fall at Sorrento, MD | 41.3 | 0.9 | 20.6 | 26.6 | 0 | 14.9 | 0 | 24.7 | 15.6 | 0 | 23.7 | 16.7 |
| 1589464◆ | Stony Run at Ridgemedede Road at Baltimore, MD | - | - | - | 1.1 | - | 41 | 0 | 1.1 | 41 | 0 | 0.9 | 40.6 |
| 1589500 | Sawmill Creek at Glen Burnie, MD | 28.1 | 25.4 | 7.6 | 36 | 0 | 28.7 | - | - | - | - | - | - |
| 1589795 | South Fork Jabez Branch at Millersville, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1590000 | North River near Annapolis, MD | 18.2 | 0.3 | 25.1 | 54.8 | 0 | 5.2 | - | - | - | - | - | - |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | 12.4 | 0.8 | 24 | 60.1 | 0 | 4.6 | - | - | - | - | - | - |
| 1591000 | Patuxent River near Unity, MD | 6.7 | 0.2 | 51.4 | 40.8 | 0.1 | 2.1 | 0.2 | 40.9 | 2.1 | 0.2 | 40.6 | 2.6 |
| 1591400 | Cattail Creek near Glenwood, MD | 13.3 | 0.5 | 59.3 | 25.3 | 0.1 | 4.3 | 0.1 | 25.1 | 4.6 | 0.1 | 23.2 | 5.8 |
| 1591700 | Hawlings River near Sandy Spring, MD | 19.2 | 1 | 41.2 | 32.7 | 0.2 | 8.9 | 0.4 | 33 | 10.2 | 0.5 | 32.9 | 10.1 |
| 1592000* | Patuxent River near Burtonsville, MD | 17.4 | 0.4 | 43.9 | 32.2 | 1.8 | 5.6 | - | - | - | - | - | - |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | 64.4 | 14.3 | 0 | 15.5 | 0 | 32.9 | - | - | - | - | - | - |
| 1593500* | Little Patuxent River at Guilford, MD | 47.1 | 8.8 | 14 | 20.9 | 0.6 | 27.5 | 0.6 | 21.7 | 27.5 | 0.6 | 20.7 | 28.4 |
| 1594000 | Little Patuxent River at Savage, MD | 35.9 | 4.6 | 27.8 | 26 | 0.3 | 17.6 | 0.3 | 25.9 | 18 | 0.3 | 24.8 | 19.1 |
| 1594400 | Dorsey Run near Jessup, MD | 15.7 | 28.2 | 7.8 | 33.8 | 0 | 29.3 | - | - | - | - | - | - |
| 1594440 | Patuxent River near Bowie, MD | 24.4 | 4.2 | 27.3 | 34.8 | 1.1 | 12.9 | - | - | - | - | - | - |
| 1594445 | Mill Branch near Mitchellville, MD | 38.4 | 4.8 | 23.8 | 29.4 | 0 | 17.6 | - | - | - | - | - | - |
| 1594500 | Western Branch near Largo, MD | 38.7 | 5.9 | 19.4 | 28.1 | 0.6 | 19 | - | - | - | - | - | - |
| 1594526 | Western Branch at Upper Marlboro, MD | 29.3 | 6.1 | 23.1 | 34.7 | 0.3 | 17.5 | - | - | - | - | - | - |
| 1594600 | Cocktown Creek near Huntington, MD | 48.4 | 1.9 | 15.3 | 34 | 0 | 14.6 | - | - | - | - | - | - |
| 1594670 | Hunting Creek near Huntingtown, MD | 13.4 | 1.3 | 17.5 | 65.1 | 0 | 5.6 | - | - | - | - | - | - |
| 1594710 | Killpeck Creek at Huntersville, MD | 15.5 | 5.7 | 18.1 | 55.5 | 0 | 10.8 | - | - | - | - | - | - |
| 1594800 | St. Leonard Creek near St. Leonard, MD | 15.2 | 0 | 14.5 | 65.1 | 0 | 4.5 | - | - | - | - | - | - |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 0.7 | 0 | 7.4 | 83.6 | 0 | 1.1 | 1.1 | 78.5 | 2.6 | 1.1 | 78.6 | 2.7 |
| 1594936 | North Fork Sand Run near Wilson, MD | 0 | 0 | 14.6 | 82 | 0 | 0.5 | 0 | 82 | 0.5 | 0 | 82.4 | 0.5 |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 2 | 0.5 | 19.1 | 74.4 | 0 | 1.2 | 0 | 74.4 | 1.2 | 0 | 74.8 | 1.2 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|---|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1589300 | Gwynns Falls at Villa Nova, MD | 0.2 | 21.2 | 35.7 | 73.7 | 75.2 | 0.5 | 65.6 | 25.8 | 8 | P |
| 1589330 | Dead Run at Franklinton, MD | 0 | 6.2 | 51.9 | 83.5 | 83.4 | 0 | 41.3 | 35.3 | 23.3 | P |
| 1589352◆ | Gwynns Falls at Washington Blvd at Baltimore, MD | 0.2 | 16.5 | 41.3 | - | - | 0.4 | 61.6 | 22.6 | 15.3 | P |
| 1589440 | Jones Fall at Sorrento, MD | 0 | 23.7 | 18.9 | 70.9 | 70.8 | 4 | 73.5 | 13.7 | 8.7 | P |
| 1589464◆ | Stony Run at Ridgemedede Road at Baltimore, MD | 0 | 1.4 | 41.7 | - | - | 0.6 | 85.5 | 9.3 | 4.4 | P |
| 1589500 | Sawmill Creek at Glen Burnie, MD | - | - | - | 66.8 | 65.3 | 33.9 | 12.5 | 44.8 | 8.6 | W |
| 1589795 | South Fork Jabez Branch at Millersville, MD | - | - | - | - | - | 0 | 60.9 | 25.5 | 3 | W |
| 1590000 | North River near Annapolis, MD | - | - | - | 70.6 | 71.7 | 0.2 | 84.7 | 3.9 | 11 | W |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | - | - | - | 71 | 71.4 | 0.7 | 82.1 | 5.4 | 11.4 | W |
| 1591000 | Patuxent River near Unity, MD | 0.2 | 42.1 | 3.9 | 65.7 | 64.5 | 0 | 68.5 | 13.3 | 18.1 | P |
| 1591400 | Cattail Creek near Glenwood, MD | 0.2 | 22.8 | 8.3 | 73.2 | 73.4 | 0 | 76 | 13.6 | 9.9 | P |
| 1591700 | Hawlings River near Sandy Spring, MD | 0.4 | 32.8 | 11.5 | 72.2 | 71.6 | 0 | 76.6 | 8.3 | 14.8 | P |
| 1592000* | Patuxent River near Burtonsville, MD | - | - | - | 70.4 | 69.7 | 0 | 72.8 | 11.9 | 13.8 | P |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | - | - | - | 76.2 | 76 | 0 | 68.4 | 11.7 | 19.9 | P |
| 1593500* | Little Patuxent River at Guilford, MD | 0.6 | 19.5 | 31.2 | 74.4 | 74.9 | 0 | 65.1 | 11.3 | 22.9 | P |
| 1594000 | Little Patuxent River at Savage, MD | 0.3 | 24 | 21.5 | 72.7 | 73.2 | 0.1 | 68.5 | 13.9 | 17.1 | W |
| 1594400 | Dorsey Run near Jessup, MD | - | - | - | 79.4 | 79.2 | 3.3 | 25 | 24.5 | 47 | W |
| 1594440 | Patuxent River near Bowie, MD | - | - | - | 73.3 | 72.4 | 5.8 | 65.8 | 19.7 | 8.7 | W |
| 1594445 | Mill Branch near Mitchellville, MD | - | - | - | 79.5 | 75.6 | 0 | 72.4 | 9.5 | 16.9 | W |
| 1594500 | Western Branch near Largo, MD | - | - | - | 76.4 | 77.2 | 0.4 | 58.8 | 25.2 | 14.9 | W |
| 1594526 | Western Branch at Upper Marlboro, MD | - | - | - | 75.6 | 76 | 0.7 | 55.3 | 25.5 | 18 | W |
| 1594600 | Cocktown Creek near Huntington, MD | - | - | - | 70.6 | 69.9 | 0.4 | 74.5 | 13.1 | 11.9 | W |
| 1594670 | Hunting Creek near Huntingtown, MD | - | - | - | 63.4 | 64.8 | 1 | 78.9 | 8.7 | 11.2 | W |
| 1594710 | Killpeck Creek at Huntersville, MD | - | - | - | 71 | 70.1 | 52.9 | 19 | 19.3 | 8.8 | W |
| 1594800 | St. Leonard Creek near St. Leonard, MD | - | - | - | 60 | 62 | 6.7 | 80.3 | 3.8 | 9.2 | W |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 0.9 | 73.1 | 1.9 | 63 | 63.7 | 0 | 3 | 84.6 | 12.2 | A |
| 1594936 | North Fork Sand Run near Wilson, MD | 0 | 84.4 | 0.9 | 62.6 | 64 | 0 | 2.6 | 84.8 | 12.5 | A |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 0 | 76.5 | 1.6 | 62.7 | 64.4 | 0 | 0.4 | 94.1 | 5.6 | A |

◆ New gaging station added since 2010 analysis.


* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 5)

| Stations (USGS Numbers) | Pages in Appendix |
|-------------------------|-------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

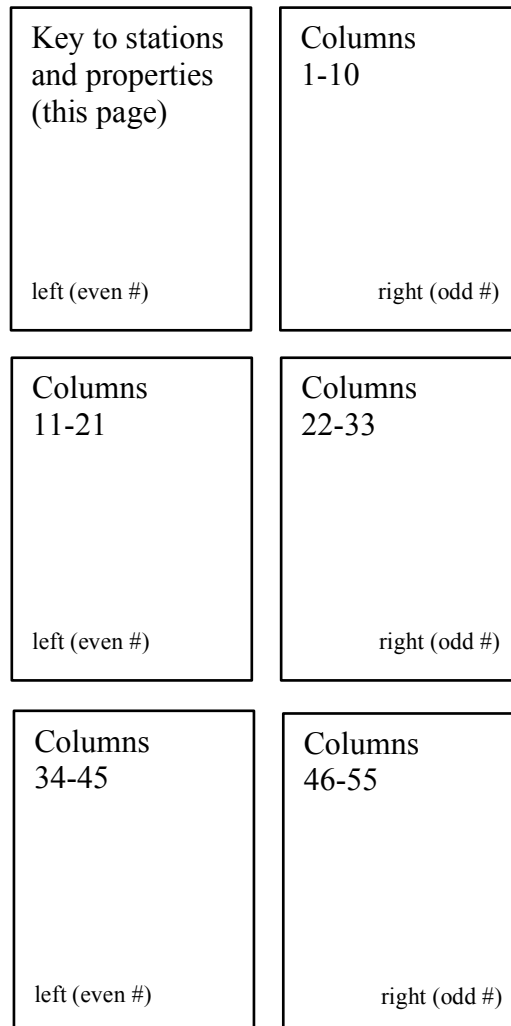

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|--|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1596005 | Savage River near Frostburg, MD | 14 | 1.43 | 8.5 | 3.4 | 21.8 | 0.09877 | 93.3 | 0 | 100 | 0.35 |
| 1596500 | Savage River near Barton, MD | 54 | 48.53 | 54.5 | 20.9 | 62.5 | 0.203 | 905.8 | 0 | 94.6 | 0.62 |
| 1597000 | Crabtree Creek near Swanton, MD | 33 | 16.75 | 29.5 | 10.7 | 117.2 | 0.19438 | 921.3 | 0 | 95.5 | 0.56 |
| 1598000 | Savage River at Bloomington, MD | 24 | 115.87 | 99.5 | 45.9 | 46.2 | 0.22653 | 1363.4 | 0 | 85.8 | 0.62 |
| 1599000 | Georges Creek at Franklin, MD | 82 | 72.74 | 57.2 | 19.6 | 58.5 | 0.164 | 1181.4 | 0 | 64.7 | 0.58 |
| 1601500 | Wills Creek near Cumberland, MD | 83 | 247.03 | 107.3 | 46.5 | 47.4 | 0.209 | 1205.5 | 0 | 42.4 | 0.52 |
| 1609000 | Town Creek near Oldtown, MD | 33 | 149.45 | 103.2 | 46.8 | 12.4 | 0.202 | 730.4 | 0 | 7.4 | 0.33 |
| 1609500 | Sawpit Run near Oldtown, MD | 25 | 5 | 16.2 | 6 | 53.5 | 0.16636 | 235.6 | 0 | 0 | 0.54 |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | 15 | 0.65 | - | - | - | 0.16 | 377.2 | - | - | - |
| 1610150 | Bear Creek at Forest Park, MD | 18 | 10.27 | 22.2 | 10 | 49.7 | 0.11542 | 402.3 | 0 | 0 | 0.36 |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 24 | 102.71 | 73.3 | 36.8 | 20.7 | 0.184 | 632.8 | 0 | 0 | 0.4 |
| 1612500 | Little Tonoloway Creek near Hancock, MD | 17 | 17.28 | 26.3 | 7.5 | 82.9 | 0.14322 | 397.8 | 0 | 0 | 0.31 |
| 1613150 | Ditch Run near Hancock, MD | 22 | 4.6 | 17.7 | 6.8 | 55 | 0.11342 | 326.2 | 0 | 0 | 0.67 |
| 1613160 | Potomac River tributary near Hancock, MD | 12 | 1.24 | - | - | 125.3 | 0.129 | - | 0 | - | - |
| 1614500 | Conococheague Creek at Fairview, MD | 85 | 502.44 | 249.7 | 68 | 9.2 | 0.1 | 498.1 | 41.5 | 0.9 | 0.24 |
| 1617800* | Marsh Run at Grimes, MD | 48 | 18.34 | 35.8 | 10.1 | 25.5 | 0.035 | 149.3 | 100 | 0 | 0.49 |
| 1619000 | Antietam Creek near Waynesboro, PA | 27 | 93.9 | 68.6 | 21.7 | 58.8 | 0.103 | 489.2 | 64.6 | 0.3 | 0.3 |
| 1619475 | Dog Creek tributary near Locust Grove, MD | 11 | 0.11 | 2.2 | 0.8 | 242.3 | 0.0805 | 81.8 | 81.7 | 0 | 0.31 |
| 1619500 | Antietam Creek near Sharpsburg, MD | 85 | 280.89 | 135.8 | 57.9 | 11 | 0.081 | 496.6 | 75.6 | 0.1 | 0.27 |
| 1637000 | Little Catocin Creek at Harmony, MD | 30 | 8.76 | 18.9 | 6.7 | 186.2 | 0.15203 | 490.3 | 0 | 0 | 0.41 |
| 1637500 | Catocin Creek near Middletown, MD | 65 | 67.33 | 60 | 25.3 | 45.6 | 0.124 | 665.5 | 0 | 0 | 0.43 |
| 1637600 | Hollow Road Creek near Middletown, MD | 11 | 2.32 | 9.4 | 3.1 | 217.8 | 0.13042 | 246.4 | 0 | 0 | 0.26 |
| 1639000 | Monocacy River at Bridgeport, MD | 72 | 172.7 | 104.2 | 32.4 | 19.5 | 0.052 | 285.8 | 1.3 | 0 | 0.18 |
| 1639095* | Piney Creek tributary at Taneytown, MD | 10 | 0.61 | 4.5 | 1.7 | 74.3 | 0.0338 | 63.7 | 0 | 0 | 0.55 |
| 1639140◆ | Piney Creek near Taneytown, MD | 12 | 31.07 | - | - | 17.6 | 0.042 | - | 2.4 | - | - |
| 1639500 | Big Pipe Creek at Bruceville, MD | 65 | 102.98 | 77 | 28.8 | 12.3 | 0.081 | 305.4 | 1.1 | 0 | 0.39 |
| 1640000 | Little Pipe Creek at Bruceville, MD | 30 | 8.11 | 20.5 | 4.9 | 66.7 | 0.09645 | 187.4 | 75.6 | 0 | 0.47 |
| 1640500 | Owens Creek at Lantz, MD | 53 | 6.1 | 17.2 | 4.5 | 198.8 | 0.12628 | 505.5 | 0 | 0 | 0.55 |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | 11 | 1.12 | 6.4 | 2.1 | 48.5 | 0.04022 | 72.4 | 0 | 0 | 0.6 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|--|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1596005 | Savage River near Frostburg, MD | 1 | 2.2 | 100 | 286 | 668 | 3.2 | 0 | 11.1 | 85.8 | 0 | 1.2 |
| 1596500 | Savage River near Barton, MD | 17 | 86.1 | 100 | 250.3 | 585 | 0.1 | 0.1 | 18.2 | 81.4 | 0.1 | 0.1 |
| 1597000 | Crabtree Creek near Swanton, MD | 6 | 26.9 | 100 | 262.3 | 614.1 | 0.3 | 0.2 | 11.8 | 87.8 | 0 | 0.2 |
| 1598000 | Savage River at Bloomington, MD | 42 | 199.1 | 100 | 256.3 | 599.6 | 0.1 | 0.1 | 13.1 | 85.5 | 0.4 | 0.1 |
| 1599000 | Georges Creek at Franklin, MD | 29 | 118.8 | 100 | 262.1 | 612.9 | 3.9 | 0.9 | 9.2 | 80.3 | 0 | 2.2 |
| 1601500 | Wills Creek near Cumberland, MD | 110 | 417.1 | 22 | 247 | 576.9 | 1.7 | 0.3 | 15.4 | 82.2 | 0 | 1 |
| 1609000 | Town Creek near Oldtown, MD | 89 | 327.9 | 39.9 | 252 | 588.6 | 0 | 0.2 | 15 | 84.7 | 0 | 0.2 |
| 1609500 | Sawpit Run near Oldtown, MD | 3 | 12 | 100 | 248 | 579 | 0 | 0 | 10.4 | 89.6 | 0 | 0 |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1610150 | Bear Creek at Forest Park, MD | 7 | 22.7 | 29.8 | 271 | 632 | 0 | 1.4 | 46.4 | 52.2 | 0 | 1.4 |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 55 | 202 | 21.4 | 273.8 | 638.9 | 0 | 0.4 | 23.2 | 76.4 | 0 | 0.4 |
| 1612500 | Little Tonoloway Creek near Hancock, MD | 10 | 34.1 | 60.9 | 273.3 | 637.5 | 0 | 1.7 | 18.4 | 79.3 | 0 | 1.7 |
| 1613150 | Ditch Run near Hancock, MD | 3 | 10.5 | 46.1 | 270.4 | 630.6 | 0.5 | 0.1 | 74.8 | 24.5 | 0 | 0.3 |
| 1613160 | Potomac River tributary near Hancock, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1614500 | Conococheague Creek at Fairview, MD | 236 | 856.3 | 0.5 | 284.2 | 664.2 | 1.7 | 2 | 59.9 | 35.8 | 0.1 | 2.4 |
| 1617800* | Marsh Run at Grimes, MD | 5 | 20 | 100 | 291.3 | 680.8 | 4.9 | 1.6 | 92.2 | 1.3 | 0 | 3.2 |
| 1619000 | Antietam Creek near Waynesboro, PA | 49 | 161.1 | 7.4 | 342.1 | 799.8 | 3.6 | 1.4 | 51.8 | 42.5 | 0.1 | 2.6 |
| 1619475 | Dog Creek tributary near Locust Grove, MD | 1 | 0 | 100 | 292 | 682 | 0 | 0 | 84.7 | 15.3 | 0 | 0 |
| 1619500 | Antietam Creek near Sharpsburg, MD | 119 | 467.3 | 61.9 | 307.1 | 717.8 | 3.9 | 2.5 | 68.6 | 24.4 | 0.1 | 3.6 |
| 1637000 | Little Catoctin Creek at Harmony, MD | 6 | 14.7 | 100 | 295.4 | 741.7 | 0.1 | 0.6 | 47.4 | 51.9 | 0 | 0.6 |
| 1637500 | Catoctin Creek near Middletown, MD | 29 | 117.7 | 100 | 318 | 760.8 | 0.6 | 1 | 60.3 | 37.9 | 0 | 1.2 |
| 1637600 | Hollow Road Creek near Middletown, MD | 2 | 5.2 | 100 | 295 | 741 | 2.8 | 4.9 | 64.9 | 27.4 | 0 | 6 |
| 1639000 | Monocacy River at Bridgeport, MD | 89 | 344.3 | 6.8 | 313.8 | 738.5 | 1.5 | 0.8 | 77.6 | 19.7 | 0.1 | 1.2 |
| 1639095* | Piney Creek tributary at Taneytown, MD | 1 | 1.4 | 100 | 293 | 734 | 16.4 | 0 | 83.6 | 0 | 0 | 6.2 |
| 1639140◆ | Piney Creek near Taneytown, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1639500 | Big Pipe Creek at Bruceville, MD | 50 | 179.7 | 100 | 320.1 | 802.1 | 0.6 | 0 | 85.2 | 14.2 | 0 | 0.2 |
| 1640000 | Little Pipe Creek at Bruceville, MD | 4 | 13.3 | 100 | 328 | 822 | 15.5 | 2 | 68.9 | 11.4 | 0.3 | 7.6 |
| 1640500 | Owens Creek at Lantz, MD | 2 | 8.6 | 100 | 375.4 | 877.6 | 0.5 | 0 | 17.4 | 82.1 | 0 | 0.2 |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | 1 | 2.5 | 100 | 293 | 734 | 0 | 0 | 100 | 0 | 0 | 0 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com8 5 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|--|-----------|------------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1596005 | Savage River near Frostburg, MD | 2.2 | 0.5 | 0 | 66.7 | 15.9 | 1 | 1.3 | 0.3 | 12.5 | 66.8 | 16 | 0.8 |
| 1596500 | Savage River near Barton, MD | 0.3 | 0.3 | 0 | 76.4 | 0.6 | 0.3 | 0.5 | 0.2 | 20.2 | 76 | 0.7 | 0.3 |
| 1597000 | Crabtree Creek near Swanton, MD | 0.7 | 0.4 | 0 | 77.6 | 0 | 0.5 | 0.6 | 0.3 | 14.6 | 82 | 0 | 0.4 |
| 1598000 | Savage River at Bloomington, MD | 0.3 | 0.2 | 0 | 79.6 | 0.8 | 0.3 | 0.4 | 0.2 | 15 | 79.8 | 0.8 | 0.4 |
| 1599000 | Georges Creek at Franklin, MD | 6.7 | 0.3 | 0 | 64.4 | 0 | 3.7 | 6 | 0.3 | 11.3 | 64 | 0 | 3.4 |
| 1601500 | Wills Creek near Cumberland, MD | 9.7 | 1.4 | 0 | 69.7 | 0.1 | 4.2 | 10.4 | 1.5 | 11 | 69.4 | 0.1 | 4.4 |
| 1609000 | Town Creek near Oldtown, MD | 0.5 | 0.2 | 0 | 78 | 0 | 0.3 | 0.5 | 0 | 20.7 | 79.4 | 0 | 0.1 |
| 1609500 | Sawpit Run near Oldtown, MD | 0 | 0 | 0 | 88.9 | 0 | 0 | 0 | 0 | 10.5 | 88.6 | 0 | 0 |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | - | - | - | 97.3 | - | 0 | - | - | - | - | - | - |
| 1610150 | Bear Creek at Forest Park, MD | 0 | 0 | 0 | 77.8 | 0 | 0 | 0 | 0 | 18.4 | 67.8 | 0 | 3.2 |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 0 | 0 | 0 | 76.6 | 0 | 0 | 0 | 0 | 22.9 | 77.4 | 0 | 0.5 |
| 1612500 | Little Tonoloway Creek near Hancock, MD | 0 | 0 | 0 | 86.2 | 0.2 | 0 | 3.7 | 0 | 16.5 | 74.8 | 0.2 | 1.4 |
| 1613150 | Ditch Run near Hancock, MD | 0 | 0 | 0 | 72.7 | 0 | 0 | 3.2 | 0 | 47.4 | 47.6 | 0 | 0.8 |
| 1613160 | Potomac River tributary near Hancock, MD | - | - | - | 41.6 | - | 2 | - | - | - | - | - | - |
| 1614500 | Conococheague Creek at Fairview, MD | 4.6 | 0.5 | 0 | 32.6 | 0 | 1.6 | 10.4 | 5.4 | 70.4 | 40.7 | 0 | 7.1 |
| 1617800* | Marsh Run at Grimes, MD | 8.2 | 0.7 | 0 | 8.3 | 0 | 3.4 | 11.5 | 1.1 | 75.6 | 8.1 | 0.2 | 5.1 |
| 1619000 | Antietam Creek near Waynesboro, PA | 4.3 | 0 | 0 | 56.9 | 0.3 | 3.9 | 7.5 | 0.7 | 46.7 | 56.1 | 0.6 | 5.9 |
| 1619475 | Dog Creek tributary near Locust Grove, MD | 0 | 0 | 0 | 9.7 | 0 | 0 | 0 | 0 | 76.6 | 23.4 | 0 | 0 |
| 1619500 | Antietam Creek near Sharpsburg, MD | 7.5 | 2.6 | 0 | 24.8 | 0.1 | 4.8 | 8.8 | 2.7 | 61.3 | 24.4 | 0.1 | 5.4 |
| 1637000 | Little Catocin Creek at Harmony, MD | 3 | 0 | 0 | 54.8 | 0 | 0.8 | 6.9 | 0 | 40.3 | 52.8 | 0 | 2.5 |
| 1637500 | Catocin Creek near Middletown, MD | 2.6 | 0.1 | 0 | 46.6 | 0 | 0.8 | 4.6 | 0.2 | 48.9 | 45.2 | 0 | 1.5 |
| 1637600 | Hollow Road Creek near Middletown, MD | 6.1 | 0 | 0 | 37.6 | 0 | 1.5 | 5.3 | 0.6 | 58.6 | 35.6 | 0 | 1.8 |
| 1639000 | Monocacy River at Bridgeport, MD | 2.3 | 0.1 | 0 | 13.1 | 0 | 0.8 | 3.4 | 0 | 84 | 14 | 0 | 0.9 |
| 1639095* | Piney Creek tributary at Taneytown, MD | 19.1 | 3.8 | 0 | 2.7 | 0 | 11.4 | 14 | 5.2 | 76.8 | 3.9 | 0 | 10.9 |
| 1639140◆ | Piney Creek near Taneytown, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1639500 | Big Pipe Creek at Bruceville, MD | 4.8 | 0.6 | 0 | 22 | 0 | 1.8 | 7 | 0.3 | 69.8 | 22 | 0 | 2.5 |
| 1640000 | Little Pipe Creek at Bruceville, MD | 17.8 | 1.2 | 0 | 19.5 | 0.1 | 6.9 | 23 | 1.9 | 47.9 | 18 | 0.1 | 11.1 |
| 1640500 | Owens Creek at Lantz, MD | 1.2 | 0 | 0 | 80.8 | 0 | 0.5 | 0.6 | 0 | 21.5 | 77.4 | 0 | 0.4 |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | 0 | 0 | 0 | 4.7 | 0 | 0 | 0 | 0 | 97.3 | 2.7 | 0 | 0 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|--|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1596005 | Savage River near Frostburg, MD | 7.1 | 1.3 | 12.3 | 62.7 | 14.4 | 3.7 | - | - | - | - | - | - |
| 1596500 | Savage River near Barton, MD | 1.6 | 0.2 | 19.7 | 77.3 | 0.6 | 0.6 | 0.7 | 76.4 | 0.8 | 0.4 | 76.8 | 0.8 |
| 1597000 | Crabtree Creek near Swanton, MD | 2.2 | 0 | 13.7 | 81.7 | 0 | 0.5 | - | - | - | - | - | - |
| 1598000 | Savage River at Bloomington, MD | 1.4 | 0.1 | 14.4 | 79.5 | 0.8 | 0.6 | - | - | - | - | - | - |
| 1599000 | Georges Creek at Franklin, MD | 6.7 | 0.4 | 12.1 | 72.3 | 0 | 3.9 | 0 | 72.9 | 3.9 | 0 | 72.8 | 3.8 |
| 1601500 | Wills Creek near Cumberland, MD | 12.1 | 1.6 | 10.1 | 73.2 | 0.1 | 5.8 | 0 | 73.8 | 5.9 | 0 | 74.9 | 5.9 |
| 1609000 | Town Creek near Oldtown, MD | 1.8 | 0 | 20.9 | 77.2 | 0 | 0.5 | 0 | 77.3 | 0.5 | 0 | 77.2 | 0.5 |
| 1609500 | Sawpit Run near Oldtown, MD | 1.2 | 0 | 10.7 | 86.8 | 0 | 0.4 | - | - | - | - | - | - |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1610150 | Bear Creek at Forest Park, MD | 0.6 | 0 | 17.8 | 65.9 | 0 | 3.3 | - | - | - | - | - | - |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 2.8 | 0.1 | 21.6 | 75.2 | 0 | 1.1 | 0 | 77.1 | 0.8 | 0 | 77.2 | 0.8 |
| 1612500 | Little Tonoloway Creek near Hancock, MD | 5.9 | 0 | 15.3 | 72.8 | 0.1 | 2 | - | - | - | - | - | - |
| 1613150 | Ditch Run near Hancock, MD | 7.6 | 0 | 44.5 | 42.6 | 0 | 1.9 | - | - | - | - | - | - |
| 1613160 | Potomac River tributary near Hancock, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1614500 | Conococheague Creek at Fairview, MD | 11.3 | 6.6 | 59.8 | 33 | 0 | 8.7 | 0 | 0 | 0 | 0 | 0 | 0 |
| 1617800* | Marsh Run at Grimes, MD | 13.4 | 1.2 | 73.6 | 9.6 | 0.2 | 5.9 | 0.1 | 16 | 7.9 | 0.1 | 16.2 | 7 |
| 1619000 | Antietam Creek near Waynesboro, PA | 15.2 | 0.3 | 40.7 | 40.4 | 0.1 | 7.8 | 0.5 | 34.1 | 11.5 | 0.5 | 40 | 8 |
| 1619475 | Dog Creek tributary near Locust Grove, MD | 0 | 0 | 85.4 | 14.6 | 0 | 0 | - | - | - | - | - | - |
| 1619500 | Antietam Creek near Sharpsburg, MD | 14.1 | 2.7 | 57.3 | 23.5 | 0.1 | 7.6 | 0.1 | 27.2 | 9.3 | 0.1 | 27.5 | 8.9 |
| 1637000 | Little Catoctin Creek at Harmony, MD | 11.1 | 0 | 38.9 | 49.9 | 0 | 2.8 | - | - | - | - | - | - |
| 1637500 | Catoctin Creek near Middletown, MD | 8.8 | 0.3 | 46.8 | 44 | 0 | 2.6 | 0 | 46.2 | 2.9 | 0 | 46.1 | 3.4 |
| 1637600 | Hollow Road Creek near Middletown, MD | 11.2 | 0.9 | 54 | 34 | 0 | 3.6 | - | - | - | - | - | - |
| 1639000 | Monocacy River at Bridgeport, MD | 3.5 | 0 | 79.5 | 14.7 | 0 | 0.9 | 0.1 | 20 | 1 | 0.1 | 19.9 | 1.1 |
| 1639095* | Piney Creek tributary at Taneytown, MD | 47.5 | 3.5 | 45.1 | 3.8 | 0 | 19.7 | - | - | - | - | - | - |
| 1639140◆ | Piney Creek near Taneytown, MD | - | - | - | 13.6 | - | 3.7 | 0.2 | 14.3 | 3.9 | 0.2 | 14.2 | 4 |
| 1639500 | Big Pipe Creek at Bruceville, MD | 9.7 | 0.4 | 66.8 | 22.6 | 0 | 3.1 | 0.2 | 23.5 | 3.4 | 0.3 | 23.6 | 3.4 |
| 1640000 | Little Pipe Creek at Bruceville, MD | 31.8 | 1.4 | 35.2 | 20.2 | 0.1 | 15.4 | - | - | - | - | - | - |
| 1640500 | Owens Creek at Lantz, MD | 3.5 | 0 | 20.2 | 75.8 | 0 | 1.1 | - | - | - | - | - | - |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | 0.7 | 0 | 96.3 | 3 | 0 | 0.2 | - | - | - | - | - | - |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|--|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1596005 | Savage River near Frostburg, MD | - | - | - | 68.1 | 74 | 1.2 | 26.5 | 45.9 | 26.4 | A |
| 1596500 | Savage River near Barton, MD | 0.4 | 78.8 | 1.3 | 63.4 | 64.5 | 0.1 | 29.4 | 63.7 | 6.6 | A |
| 1597000 | Crabtree Creek near Swanton, MD | - | - | - | 63.2 | 63.7 | 0 | 52.5 | 46.5 | 1.1 | A |
| 1598000 | Savage River at Bloomington, MD | - | - | - | 59.9 | 60.7 | 0 | 27.9 | 67.2 | 4.3 | A |
| 1599000 | Georges Creek at Franklin, MD | 0 | 71.4 | 4.2 | 63.7 | 64.7 | 4.6 | 13.5 | 77.5 | 4.5 | A |
| 1601500 | Wills Creek near Cumberland, MD | 0 | 16.2 | 1.5 | 68.9 | 66.2 | 3.6 | 35.6 | 44.5 | 16.2 | A |
| 1609000 | Town Creek near Oldtown, MD | 0 | 31.2 | 0.5 | 67.9 | 71.3 | 3.9 | 12.2 | 73.5 | 10.3 | A |
| 1609500 | Sawpit Run near Oldtown, MD | - | - | - | 71.3 | 71.6 | 0 | 10.8 | 89.1 | 0.1 | A |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | - | - | - | - | - | 0 | 0 | 100 | 0 | A |
| 1610150 | Bear Creek at Forest Park, MD | - | - | - | 77.2 | 73.9 | 0.6 | 8.5 | 89.4 | 1.4 | A |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 0 | 16.8 | 0.5 | 73.8 | 74.4 | 0.4 | 7.5 | 87 | 5.1 | A |
| 1612500 | Little Tonoloway Creek near Hancock, MD | - | - | - | 72.8 | 72.2 | 0.3 | 13.4 | 64.9 | 21.2 | A |
| 1613150 | Ditch Run near Hancock, MD | - | - | - | 78.3 | 76.2 | 0 | 3.6 | 93.7 | 2.2 | A |
| 1613160 | Potomac River tributary near Hancock, MD | - | - | - | - | - | - | - | - | - | A |
| 1614500 | Conococheague Creek at Fairview, MD | 0 | 0.2 | 0.1 | 74.2 | 79.6 | 0.4 | 33.6 | 53.7 | 11.8 | B |
| 1617800* | Marsh Run at Grimes, MD | 0.1 | 14.7 | 9.2 | 76.1 | 77.4 | 1.2 | 71.7 | 3.3 | 23.7 | B |
| 1619000 | Antietam Creek near Waynesboro, PA | 0 | 3.7 | 0.7 | 70.2 | 71.3 | 0.3 | 43 | 49 | 7.6 | B |
| 1619475 | Dog Creek tributary near Locust Grove, MD | - | - | - | 73.4 | 77.4 | 11 | 76.7 | 11.6 | 0.3 | B |
| 1619500 | Antietam Creek near Sharpsburg, MD | 0.1 | 17.1 | 6.7 | 73.6 | 75.3 | 0.6 | 55.2 | 29.7 | 14.1 | B |
| 1637000 | Little Catoctin Creek at Harmony, MD | - | - | - | 69.5 | 71.1 | 0 | 51.7 | 45.1 | 3.2 | B |
| 1637500 | Catoctin Creek near Middletown, MD | 0 | 45.2 | 6.1 | 71.7 | 72.2 | 0 | 47.2 | 47.1 | 5.3 | B |
| 1637600 | Hollow Road Creek near Middletown, MD | - | - | - | 73.5 | 73.3 | 0 | 56.9 | 41 | 1.9 | B |
| 1639000 | Monocacy River at Bridgeport, MD | 0 | 1.5 | 0.1 | 79 | 81.8 | 0 | 25.6 | 60.6 | 13.1 | B |
| 1639095* | Piney Creek tributary at Taneytown, MD | - | - | - | 80 | 82.8 | 0 | 6.2 | 93.8 | 0 | B |
| 1639140◆ | Piney Creek near Taneytown, MD | 0.4 | 14.7 | 4 | - | - | 16.9 | 22.2 | 57 | 3.9 | B |
| 1639500 | Big Pipe Creek at Bruceville, MD | 0.5 | 28.2 | 5 | 69.2 | 70.3 | 49.9 | 19.5 | 26.4 | 4.1 | B |
| 1640000 | Little Pipe Creek at Bruceville, MD | - | - | - | 67.2 | 68.1 | 67.4 | 22.6 | 9.4 | 0.6 | P |
| 1640500 | Owens Creek at Lantz, MD | - | - | - | 67.3 | 68.5 | 0 | 42.7 | 49.9 | 7.4 | B |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | - | - | - | 80 | 83.6 | 0 | 1.7 | 85.1 | 12.8 | B |

◆ New gaging station added since 2010 analysis.


* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 6)

| Stations (USGS Numbers) | Pages in Appendix |
|-------------------------|-------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

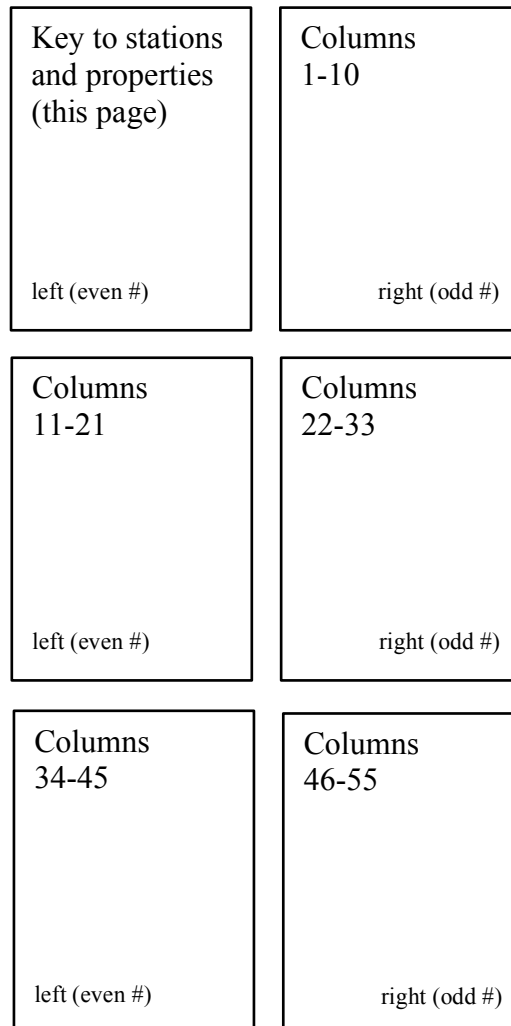

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|---|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1640965 | Hunting Creek near Foxville, MD | 13 | 2.19 | 9.2 | 3.8 | 250.6 | 0.14899 | 492.1 | 0 | 0 | 0.58 |
| 1640970 | Hunting Creek tributary near Foxville, MD | 10 | 3.91 | 11.9 | 4.1 | 156.5 | 0.11883 | 591.4 | 0 | 0 | 0.65 |
| 1641000 | Hunting Creek at Jimtown, MD | 43 | 18.69 | 30.5 | 11.3 | 128.8 | 0.13256 | 745.6 | 16.23 | 0 | 0.48 |
| 1641500 | Fishing Creek near Lewistown, MD | 39 | 7.3 | 15.1 | 5.3 | 241.2 | 0.141 | 730 | 0 | 0 | 0.67 |
| 1642000 | Monocacy River near Frederick, MD | 35 | 665.1 | 213.2 | 62.3 | 6.4 | 0.08206 | 428.3 | 14.14 | 0 | 0.25 |
| 1642400 | Dollyhyde Creek at Libertytown, MD | 10 | 2.67 | 9.3 | 3 | 49.8 | 0.07329 | 101.3 | 0 | 0 | 0.48 |
| 1642500 | Lingamore Creek near Frederick, MD | 49 | 82.37 | 61.7 | 20.6 | 24.2 | 0.09365 | 295.3 | 0 | 0 | 0.47 |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 84 | 816.45 | 207.3 | 72.4 | 5.8 | 0.076 | 520.4 | 12.3 | 0 | 0.28 |
| 1643395◆ | Soper Branch at Hyattstown, MD | 9 | 1.18 | - | - | 99.8 | 0.1 | - | 0 | - | - |
| 1643500 | Bennett Creek at Park Mills, MD | 62 | 62.94 | 54 | 18.4 | 29.6 | 0.103 | 304.8 | 0 | 0 | 0.3 |
| 1644371◆ | Little Seneca Creek tributary near Clarksburg, MD | 9 | 0.42 | - | - | 126.8 | 0.068 | - | 0 | - | - |
| 1644375◆ | Little Seneca Creek tributary near Germantown, MD | 9 | 1.29 | - | - | 63.1 | 0.043 | - | 0 | - | - |
| 1644380◆ | Cabin Branch near Boyd, MD | 9 | 0.81 | - | - | 93.5 | 0.091 | - | 0 | - | - |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | 10 | 0.28 | 2.9 | 1 | 91.9 | 0.07449 | 68.9 | 0 | 0 | 0.57 |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | 12 | 53.89 | - | - | 21.7 | 0.073 | - | 0 | - | - |
| 1645000 | Seneca Creek near Dawsonville, MD | 48 | 102.19 | 65.1 | 24.3 | 15.3 | 0.073 | 256.7 | 0 | 0 | 0.37 |
| 1645200 | Watts Branch at Rockville, MD | 30 | 3.7 | 11 | 3.2 | 58.8 | 0.05605 | 111.8 | 0 | 0 | 0.49 |
| 1646550 | Little Falls Branch near Bethesda, MD | 40 | 4.09 | 12.6 | 3.6 | 57.3 | 0.05174 | 126.8 | 0 | 0 | 0.53 |
| 1647720 | North Branch Rock Creek near Norbeck, MD | 11 | 9.68 | 19.7 | 6.4 | 26.4 | 0.05331 | 134.7 | 0 | 0 | 0.54 |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | 61 | 73.35 | 66.6 | 17.8 | 27.2 | 0.07059 | 211.4 | 0 | 0 | 0.37 |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | 10 | 2.51 | - | - | - | 0.05 | 90.8 | 0 | - | - |
| 1650085 | Nursery Run at Cloverly, MD | 10 | 0.35 | - | - | - | 0.08 | 83.9 | 0 | - | - |
| 1650190 | Batchellors Run at Oakdale, MD | 10 | 0.49 | 4 | 1.4 | 109 | 0.06 | 84.7 | 0 | 0 | 0.56 |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 62 | 21.23 | 29.1 | 9.5 | 21.1 | 0.062 | 150.2 | 0 | 0 | 0.48 |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 47 | 49.43 | 58.6 | 20.5 | 20.5 | 0.066 | 298.9 | 0 | 0 | 0.54 |

◆ New gaging station added since 2010 analysis.

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD (%) | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|---|-----------------------|---------------------|----------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1640965 | Hunting Creek near Foxville, MD | 1 | 2.9 | 100 | 376 | 879 | 0 | 0 | 2.9 | 97.1 | 0 | 0 |
| 1640970 | Hunting Creek tributary near Foxville, MD | 2 | 6.4 | 100 | 376 | 879 | 1.1 | 0.8 | 24.4 | 73.1 | 0.4 | 1.1 |
| 1641000 | Hunting Creek at Jimtown, MD | 10 | 32.5 | 100 | 376 | 879 | 4.5 | 0.5 | 18.4 | 75.8 | 0.4 | 2.1 |
| 1641500 | Fishing Creek near Lewistown, MD | 4 | 12.6 | 100 | 360.7 | 852.9 | 0 | 0 | 0 | 100 | 0 | 0 |
| 1642000 | Monocacy River near Frederick, MD | 312 | 1220.3 | 65.9 | 318 | 772.4 | 1.3 | 0.5 | 72.9 | 24.4 | 0.1 | 0.9 |
| 1642400 | Dollyhyde Creek at Libertytown, MD | 2 | 4.7 | 100 | 309 | 776 | 0 | 0 | 96.9 | 3.1 | 0 | 0 |
| 1642500 | Lingamore Creek near Frederick, MD | 52 | 174.8 | 100 | 308 | 773.4 | 0.9 | 0.1 | 78.7 | 17.3 | 0.4 | 0.4 |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 405 | 1546.9 | 72.3 | 315.3 | 770.5 | 1.8 | 0.9 | 73.4 | 22.7 | 0.1 | 1.4 |
| 1643395◆ | Soper Branch at Hyattstown, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1643500 | Bennett Creek at Park Mills, MD | 46 | 142.4 | 100 | 307 | 769.5 | 2.2 | 0.8 | 73.4 | 23.1 | 0 | 1.7 |
| 1644371◆ | Little Seneca Creek tributary near Clarksburg, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1644375◆ | Little Seneca Creek tributary near Germantown, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1644380◆ | Cabin Branch near Boyd, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | 1 | 0.5 | 100 | 300 | 752 | 0 | 0 | 100 | 0 | 0 | 0 |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1645000 | Seneca Creek near Dawsonville, MD | 64 | 223.2 | 100 | 305.6 | 766.2 | 6.5 | 2.1 | 65 | 24.3 | 0.1 | 4.4 |
| 1645200 | Watts Branch at Rockville, MD | 3 | 6.7 | 100 | 305 | 766 | 31.7 | 17.5 | 39.9 | 9.5 | 0 | 27.2 |
| 1646550 | Little Falls Branch near Bethesda, MD | 2 | 4.9 | 96.7 | 342 | 878 | 68.2 | 24 | 0 | 0.7 | 0 | 46.3 |
| 1647720 | North Branch Rock Creek near Norbeck, MD | 5 | 16.1 | 100 | 308 | 773.5 | 16.9 | 0.2 | 66.5 | 13.5 | 0 | 6.6 |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | 44 | 131.4 | 100 | 332.4 | 854.8 | 31.3 | 19 | 8.8 | 34 | 0.9 | 28.6 |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1650085 | Nursery Run at Cloverly, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1650190 | Batchellors Run at Oakdale, MD | 1 | 1.1 | 100 | 305 | 766 | 0 | 0 | 88.7 | 0 | 0 | 0 |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 11 | 37.1 | 100 | 309.1 | 777.1 | 26.3 | 1 | 44.1 | 19.4 | 0 | 10.9 |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 16 | 72 | 96.9 | 311.7 | 793.2 | 54.5 | 7.5 | 18.9 | 13.3 | 0 | 27.2 |

◆ New gaging station added since 2010 analysis.

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com8 5 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|---|-----------|------------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1640965 | Hunting Creek near Foxville, MD | 0 | 0 | 0 | 96 | 0 | 0 | 1.8 | 0 | 3.7 | 94.5 | 0 | 0.8 |
| 1640970 | Hunting Creek tributary near Foxville, MD | 4.7 | 0 | 0 | 76.7 | 0 | 1.2 | 4.2 | 0 | 18.7 | 76.8 | 0.1 | 1.1 |
| 1641000 | Hunting Creek at Jintown, MD | 5.9 | 0.3 | 0 | 77.3 | 0.4 | 1.8 | 4.9 | 1 | 14.1 | 77.6 | 0.4 | 2.3 |
| 1641500 | Fishing Creek near Lewistown, MD | 0 | 0 | 0 | 100 | 0 | 0 | 0 | 0 | 0 | 98.8 | 0.1 | 0.2 |
| 1642000 | Monocacy River near Frederick, MD | 3.9 | 0.5 | 0 | 28 | 0 | 1.7 | 5.3 | 0.4 | 65.3 | 27.7 | 0 | 2.2 |
| 1642400 | Dollyhyde Creek at Libertytown, MD | 0.3 | 0 | 0 | 6.8 | 0 | 0.1 | 1.3 | 0 | 92.7 | 6 | 0 | 0.5 |
| 1642500 | Lingamore Creek near Frederick, MD | 4 | 0.2 | 0 | 26.4 | 0.3 | 1.3 | 6.9 | 0.3 | 64.9 | 25.4 | 0.5 | 2.6 |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 4.7 | 1 | 0 | 27 | 0.1 | 2.4 | 6.4 | 0.9 | 64.2 | 26.5 | 0.1 | 3.1 |
| 1643395◆ | Soper Branch at Hyattstown, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1643500 | Bennett Creek at Park Mills, MD | 6.5 | 0.3 | 0 | 38.3 | 0 | 2 | 8.2 | 0.3 | 53.9 | 35.5 | 0 | 2.6 |
| 1644371◆ | Little Seneca Creek tributary near Clarksburg, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1644375◆ | Little Seneca Creek tributary near Germantown, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1644380◆ | Cabin Branch near Boyd, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | 0 | 0 | 0 | 15.2 | 0 | 0 | 0 | 0 | 82.8 | 17.2 | 0 | 0 |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1645000 | Seneca Creek near Dawsonville, MD | 15.1 | 2.4 | 0 | 29.3 | 0.4 | 8.3 | 19.5 | 3.1 | 42 | 27.2 | 1.1 | 11.6 |
| 1645200 | Watts Branch at Rockville, MD | 25.8 | 18.3 | 0 | 13.6 | 0 | 26.2 | 23.4 | 23.2 | 28.5 | 11.7 | 0 | 30.4 |
| 1646550 | Little Falls Branch near Bethesda, MD | 68.7 | 13.1 | 0 | 5.2 | 0 | 32.4 | 67.6 | 13.9 | 0 | 5 | 0 | 33.6 |
| 1647720 | North Branch Rock Creek near Norbeck, MD | 32.6 | 0.3 | 0 | 23.2 | 0 | 9.9 | 42.7 | 0.5 | 24.2 | 20.4 | 0 | 14.3 |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | 29.9 | 6.2 | 0 | 37.9 | 0.1 | 18.9 | 31 | 6.5 | 11.3 | 34.4 | 0.2 | 21.4 |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | - | - | - | 33.6 | - | 5.1 | - | - | - | - | - | - |
| 1650085 | Nursery Run at Cloverly, MD | - | - | - | 66.2 | - | 3.8 | - | - | - | - | - | - |
| 1650190 | Batchellors Run at Oakdale, MD | 21.6 | 0 | 0 | 4.4 | 0 | 5.4 | 24.7 | 0 | 40 | 16 | 0 | 14.6 |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 29.8 | 1.3 | 0 | 26.3 | 0 | 11.6 | 37.6 | 1.7 | 17.8 | 25.5 | 0 | 16.9 |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 51.5 | 3.8 | 0 | 20.7 | 0.1 | 22.3 | 54.2 | 4.2 | 7.9 | 19.7 | 0.1 | 25.1 |

◆ New gaging station added since 2010 analysis.

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|---|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1640965 | Hunting Creek near Foxville, MD | 1.5 | 0 | 3.1 | 95.4 | 0 | 0.4 | - | - | - | - | - | - |
| 1640970 | Hunting Creek tributary near Foxville, MD | 4.6 | 0 | 18.1 | 77.2 | 0 | 1.2 | - | - | - | - | - | - |
| 1641000 | Hunting Creek at Jimtown, MD | 9.6 | 1.7 | 13.1 | 73.5 | 0.3 | 4.3 | - | - | - | - | - | - |
| 1641500 | Fishing Creek near Lewistown, MD | 0.8 | 0 | 0 | 99.3 | 0.1 | 0.2 | 0 | 99.3 | 0.2 | 0 | 97.8 | 0.5 |
| 1642000 | Monocacy River near Frederick, MD | 7.5 | 0.5 | 63.1 | 27.1 | 0 | 2.8 | - | - | - | - | - | - |
| 1642400 | Dollyhyde Creek at Libertytown, MD | 5.7 | 0 | 89.6 | 4.7 | 0 | 1.4 | - | - | - | - | - | - |
| 1642500 | Lingamore Creek near Frederick, MD | 12.8 | 0.5 | 61.8 | 23.4 | 0.3 | 3.9 | - | - | - | - | - | - |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 9.3 | 1.2 | 61.7 | 26.2 | 0.1 | 4.2 | 0.2 | 29.2 | 4.9 | 0.3 | 29.2 | 4.8 |
| 1643395◆ | Soper Branch at Hyattstown, MD | - | - | - | 86.6 | - | 1.9 | 0 | 86.6 | 1.9 | 0 | 87.1 | 1.9 |
| 1643500 | Bennett Creek at Park Mills, MD | 11.2 | 0.8 | 48.1 | 38.4 | 0 | 4 | 0.1 | 43 | 4.7 | 0.1 | 43.1 | 4.8 |
| 1644371◆ | Little Seneca Creek tributary near Clarksburg, MD | - | - | - | 37 | - | 3.5 | 0 | 37 | 3.5 | 0 | 36.6 | 3.8 |
| 1644375◆ | Little Seneca Creek tributary near Germantown, MD | - | - | - | 13.6 | - | 33.4 | 0 | 6.9 | 50.7 | 0 | 6.4 | 51.1 |
| 1644380◆ | Cabin Branch near Boyd, MD | - | - | - | 34.4 | - | 1.1 | 0 | 43.7 | 1.1 | 0 | 42.8 | 1.2 |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | 0 | 0 | 70 | 30 | 0 | 0 | - | - | - | - | - | - |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | - | - | - | 28.4 | - | 22.4 | 0.6 | 27.2 | 23.1 | 0.6 | 27.2 | 21.4 |
| 1645000 | Seneca Creek near Dawsonville, MD | 25.8 | 3.9 | 31.2 | 33.1 | 1.1 | 15 | 1 | 32.5 | 16.3 | 1.1 | 32.7 | 15.4 |
| 1645200 | Watts Branch at Rockville, MD | 27 | 22.8 | 26.6 | 8.9 | 0 | 31.6 | - | - | - | - | - | - |
| 1646550 | Little Falls Branch near Bethesda, MD | 64.4 | 13.5 | 0 | 1 | 0 | 35.3 | - | - | - | - | - | - |
| 1647720 | North Branch Rock Creek near Norbeck, MD | 45.5 | 0.5 | 17.8 | 28.8 | 0.1 | 15.9 | - | - | - | - | - | - |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | 34.5 | 8.2 | 8.9 | 29.9 | 0.2 | 24.8 | - | - | - | - | - | - |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1650085 | Nursery Run at Cloverly, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1650190 | Batchellors Run at Oakdale, MD | 21 | 0 | 27.6 | 37.6 | 0.8 | 6.7 | - | - | - | - | - | - |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 47.1 | 0.7 | 9.2 | 28.4 | 0.1 | 21.7 | 0.1 | 24.8 | 22.1 | 0.2 | 23.6 | 22.2 |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 57.7 | 3.9 | 4.1 | 19.9 | 0.1 | 30.7 | 0.1 | 17.7 | 30.5 | 0.1 | 17.4 | 28.4 |

◆ New gaging station added since 2010 analysis.

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|---|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1640965 | Hunting Creek near Foxville, MD | - | - | - | 64.3 | 64.7 | 0 | 30.2 | 64.6 | 5.2 | B |
| 1640970 | Hunting Creek tributary near Foxville, MD | - | - | - | 68.7 | 68.4 | 0 | 34.4 | 55.9 | 9.7 | B |
| 1641000 | Hunting Creek at Jimtown, MD | - | - | - | 66 | 66.7 | 3.4 | 38.9 | 51.1 | 6.1 | B |
| 1641500 | Fishing Creek near Lewistown, MD | 0 | 99.8 | 0.7 | 57 | 57.1 | 0 | 78.8 | 17.8 | 3 | B |
| 1642000 | Monocacy River near Frederick, MD | - | - | - | 71.9 | 73.4 | 12.7 | 31.2 | 46.8 | 8.8 | P |
| 1642400 | Dollyhyde Creek at Libertytown, MD | - | - | - | 66.4 | 72.2 | 6.2 | 45.9 | 30.9 | 16.9 | P |
| 1642500 | Lingamore Creek near Frederick, MD | - | - | - | 64.3 | 66.2 | 20.4 | 50.7 | 18.9 | 9.3 | P |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 0.3 | 21.9 | 4.7 | 70.7 | 72.1 | 13.4 | 36 | 41.3 | 8.8 | P/B |
| 1643395◆ | Soper Branch at Hyattstown, MD | 0 | 86.4 | 1.5 | - | - | 0 | 5.6 | 8.1 | 86.3 | B |
| 1643500 | Bennett Creek at Park Mills, MD | 0.1 | 41.7 | 6.4 | 63.1 | 61.7 | 5 | 37.8 | 23.1 | 34.1 | B |
| 1644371◆ | Little Seneca Creek tributary near Clarksburg, MD | 0 | 23.5 | 28 | - | - | 0 | 59.4 | 19.4 | 21.3 | P |
| 1644375◆ | Little Seneca Creek tributary near Germantown, MD | 0.1 | 8.6 | 53.5 | - | - | 0 | 84.5 | 4.9 | 9.9 | P |
| 1644380◆ | Cabin Branch near Boyd, MD | 0 | 42.5 | 1.5 | - | - | 0 | 41.8 | 23.2 | 35 | P |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | - | - | - | 67 | 65.5 | 0 | 9.2 | 32.3 | 58.5 | B |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | 0.6 | 26.6 | 25.5 | - | - | 0 | 58.4 | 13.7 | 27.3 | P |
| 1645000 | Seneca Creek near Dawsonville, MD | 1.1 | 31.9 | 18.8 | 69.7 | 69.9 | 0 | 49 | 20.1 | 29.9 | B |
| 1645200 | Watts Branch at Rockville, MD | - | - | - | 76.8 | 78 | 0 | 82.5 | 3.9 | 13.6 | P |
| 1646550 | Little Falls Branch near Bethesda, MD | - | - | - | 78.7 | 77.2 | 0 | 84.1 | 0.7 | 15.2 | P |
| 1647720 | North Branch Rock Creek near Norbeck, MD | - | - | - | 72.7 | 70.8 | 0 | 79.1 | 4.7 | 16 | P |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | - | - | - | 78.1 | 77.9 | 3.4 | 32.1 | 43.7 | 20.3 | W |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | - | - | - | - | - | 0 | 78.1 | 9.1 | 12.6 | P |
| 1650085 | Nursery Run at Cloverly, MD | - | - | - | - | - | 0 | 80.8 | 18.2 | 1 | P |
| 1650190 | Batchellors Run at Oakdale, MD | - | - | - | 74.3 | 66.9 | 0 | 82.7 | 10.4 | 5.7 | P |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 0.2 | 23 | 23.8 | 71.9 | 70.8 | 0 | 80.1 | 6.1 | 13.6 | P |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 0.1 | 17.7 | 30.4 | 75.1 | 74.4 | 0.1 | 73.9 | 10 | 15.8 | W/P |


◆ New gaging station added since 2010 analysis.

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

Key to Appendix 1 (Part 7)

| Stations (USGS Numbers) | Pages in Appendix |
|--------------------------------|--------------------------|
| 1483200 – 1493500 | A1-9 – A1-13 |
| 1494000 – 1583600 | A1-15 – A1-19 |
| 158397967 – 1589240 | A1-21 – A1-25 |
| 1589300 – 1594950 | A1-27 – A1-31 |
| 1596005 – 1640700 | A1-33 – A1-37 |
| 1640965 – 1651000 | A1-39 – A1-43 |
| 1653500 – 3078000 | A1-45 – A1-49 |

Properties for each set of stations are presented in five pages of tabular data, as shown in the key below. The column numbers in the page key correspond to the watershed properties listed on pages A1-2 – A1-7.

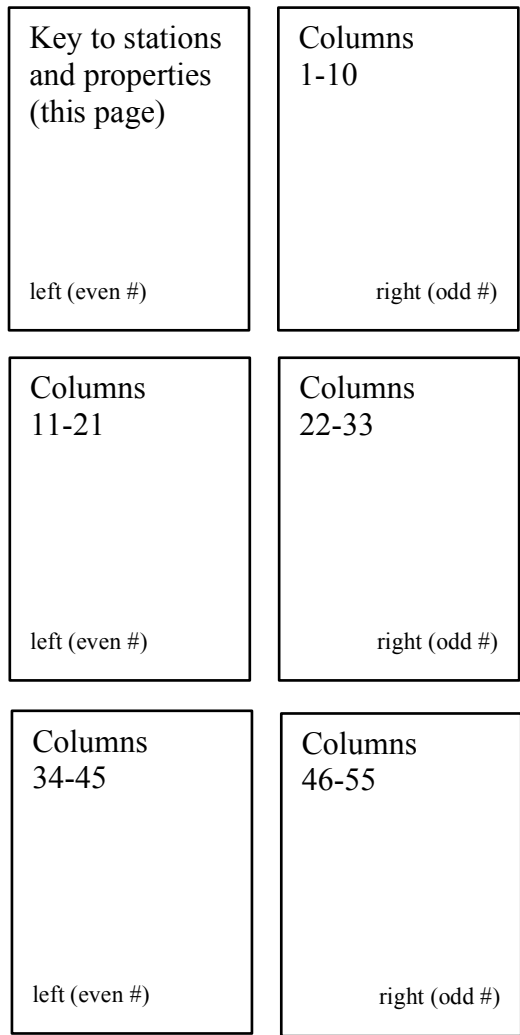

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Area (mi ²) | Perimeter (mi) | Length (mi) | Channel Slope (ft/mi) | Watershed Slope (ft/ft) | Basin Relief (ft) | Lime (%) | High Elev. (%) | Hypso-metric Ratio |
|----------------|---|-----------------|-------------------------|----------------|-------------|-----------------------|-------------------------|-------------------|----------|----------------|--------------------|
| 1653500 | Henson Creek at Oxon Hill, MD | 30 | 17.37 | 31.1 | 10.1 | 24.5 | 0.06079 | 168.7 | 0 | 0 | 0.65 |
| 1653600 | Piscataway Creek at Piscataway, MD | 34 | 39.75 | 50.3 | 15.9 | 15.8 | 0.05524 | 189 | 0 | 0 | 0.69 |
| 1658000 | Mattawoman Creek near Pomonkey, MD | 36 | 55.61 | 73.7 | 20.7 | 10.4 | 0.02942 | 142.2 | 0 | 0 | 0.71 |
| 1660900 | Wolf Den Branch near Cedarville, MD | 13 | 1.98 | 11.7 | 3.4 | 17 | 0.01344 | 45.8 | 0 | 0 | 0.7 |
| 1660920 | Zekiah Swamp Run near Newtown, MD | 16 | 81.02 | 73.6 | 19.3 | 10.8 | 0.0344 | 137 | 0 | 0 | 0.69 |
| 1660930 | Clark Run near Bel Alton, MD | 11 | 11.21 | - | - | - | 0.04 | 105.2 | 0 | - | - |
| 1661000 | Chaptico Creek at Chaptico, MD | 25 | 10.5 | 30.5 | 8.5 | 21.1 | 0.0574 | 124.6 | 0 | 0 | 0.73 |
| 1661050 | St. Clements Creek near Clements, MD | 30 | 18.21 | 31.2 | 8.4 | 13.9 | 0.04937 | 103.1 | 0 | 0 | 0.61 |
| 1661430 | Glebe Branch at Valley Lee, MD | 11 | 0.41 | 2 | 0.8 | 56.7 | 0.0229 | 21.3 | 0 | 0 | 0.34 |
| 1661500 | St. Marys River at Great Mills, MD | 53 | 25.28 | 34.8 | 10 | 13.7 | 0.0269 | 93.7 | 0 | 0 | 0.61 |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | 12 | 0.55 | 3.9 | 1.3 | 106.7 | 0.06632 | 76.3 | 0 | 100 | 0.47 |
| 3075500 | Youghiogheny River near Oakland, MD | 72 | 134.16 | 97.6 | 29.3 | 9.3 | 0.115 | 239.6 | 0 | 100 | 0.24 |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | 22 | 0.52 | 3.9 | 1.4 | 206.3 | 0.07148 | 175.8 | 0 | 100 | 0.65 |
| 3076500 | Youghiogheny River at Friendsville, MD | 89 | 294.14 | 140.5 | 48.8 | 18.5 | 0.112 | 1149.6 | 0 | 98.7 | 0.6 |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | 11 | 0.21 | - | - | - | 0.2 | 259.7 | - | - | - |
| 3076600 | Bear Creek at Friendsville, MD | 48 | 49.07 | 49.4 | 17.1 | 61.4 | 0.168 | 928.1 | 0 | 96.3 | 0.63 |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | 11 | 1.07 | 7.8 | 2.4 | 140 | 0.08474 | 164.2 | 0 | 100 | 0.47 |
| 3078000 | Casselman River at Grantsville, MD | 65 | 63.77 | 61.2 | 24.5 | 29.7 | 0.101 | 508 | 0 | 100 | 0.5 |

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | # First Order Streams | Total Stream Length | Area in MD | 2-yr Prec. (in × 100) | 100-yr Prec. (in × 100) | Res70 (%) | Com70 (%) | Ag70 (%) | For70 (%) | St70 (%) | IA70 (%) |
|----------------|---|-----------------------|---------------------|------------|-----------------------|-------------------------|-----------|-----------|----------|-----------|----------|----------|
| 1653500 | Henson Creek at Oxon Hill, MD | 7 | 23.3 | 100 | 325.4 | 836.2 | 51.1 | 24.3 | 0.5 | 18.3 | 0 | 40.9 |
| 1653600 | Piscataway Creek at Piscataway, MD | 16 | 57.5 | 100 | 357.3 | 917.8 | 26.1 | 8.9 | 21.8 | 37.8 | 0.2 | 17.5 |
| 1658000 | Mattawoman Creek near Pomonkey, MD | 31 | 96.1 | 100 | 302.3 | 777.3 | 16.4 | 1.9 | 21.7 | 58.6 | 0.1 | 7.8 |
| 1660900 | Wolf Den Branch near Cedarville, MD | 1 | 3.6 | 100 | 287.4 | 739.1 | 24.3 | 0 | 3.3 | 72.4 | 0 | 9.2 |
| 1660920 | Zekiah Swamp Run near Newtown, MD | 43 | 143.3 | 100 | 306 | 786.8 | 16.2 | 0.9 | 21.4 | 53.9 | 5 | 6.9 |
| 1660930 | Clark Run near Bel Alton, MD | - | - | 100 | - | - | - | - | - | - | - | - |
| 1661000 | Chaptico Creek at Chaptico, MD | 5 | 18 | 100 | 339 | 872 | 21.5 | 0 | 22.8 | 55.7 | 0 | 8.2 |
| 1661050 | St. Clements Creek near Clements, MD | 7 | 31.2 | 100 | 320 | 823 | 15.1 | 0.3 | 28.6 | 56 | 0 | 6 |
| 1661430 | Glebe Branch at Valley Lee, MD | 0 | 0 | 100 | 334 | 858 | 82.6 | 0 | 17.4 | 0 | 0 | 31.4 |
| 1661500 | St. Marys River at Great Mills, MD | 15 | 48.2 | 100 | 334 | 858 | 9.3 | 2.2 | 12.8 | 75.5 | 0 | 5.4 |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | 1 | 1.2 | 100 | 246 | 575 | 0 | 0 | 0 | 100 | 0 | 0 |
| 3075500 | Youghiogheny River near Oakland, MD | 69 | 234.5 | 61 | 248.5 | 581 | 2.3 | 0.6 | 42.3 | 53.7 | 0.5 | 1.3 |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | 1 | 0 | 100 | 245.9 | 574.7 | 0 | 0 | 35.9 | 64.1 | 0 | 0 |
| 3076500 | Youghiogheny River at Friendsville, MD | 126 | 466.1 | 77 | 235.5 | 550.7 | 1.6 | 0.3 | 30.3 | 63.4 | 2.8 | 0.9 |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | - | - | - | - | - | - | - | - | - | - | - |
| 3076600 | Bear Creek at Friendsville, MD | 22 | 81.2 | 100 | 224.3 | 524.7 | 0.4 | 0.4 | 37.3 | 61.9 | 0 | 0.5 |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | 1 | 2.3 | 100 | 238 | 557 | 0 | 0 | 0.4 | 99.6 | 0 | 0 |
| 3078000 | Casselman River at Grantsville, MD | 17 | 83 | 94.3 | 238.4 | 557.2 | 0.4 | 0.1 | 24 | 73.5 | 0.9 | 0.2 |

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res85 (%) | Com8 5 (%) | Ag85 (%) | For85 (%) | St85 (%) | IA85 (%) | Res90 (%) | Com90 (%) | Ag90 (%) | For90 (%) | St90 (%) | IA90 (%) |
|----------------|---|-----------|------------|----------|-----------|----------|----------|-----------|-----------|----------|-----------|----------|----------|
| 1653500 | Henson Creek at Oxon Hill, MD | 41.4 | 10 | 0 | 34.2 | 0 | 26.5 | 40.9 | 10.3 | 3.2 | 31.9 | 0 | 28.2 |
| 1653600 | Piscataway Creek at Piscataway, MD | 12.8 | 0.7 | 0 | 56 | 0.2 | 7.7 | 16.3 | 0.6 | 19.5 | 51.8 | 0.2 | 9.9 |
| 1658000 | Mattawoman Creek near Pomonkey, MD | 10.9 | 2.1 | 0 | 67.1 | 0.1 | 5 | 15.4 | 2.4 | 17.6 | 61.6 | 0.2 | 7.1 |
| 1660900 | Wolf Den Branch near Cedarville, MD | 0 | 0 | 0 | 81.8 | 0 | 0 | 10 | 0 | 10.4 | 74.9 | 0 | 4.6 |
| 1660920 | Zekiah Swamp Run near Newtown, MD | 8.1 | 1.4 | 0 | 62.6 | 0.2 | 4 | 11.3 | 1.5 | 23.3 | 58.8 | 0.3 | 5.3 |
| 1660930 | Clark Run near Bel Alton, MD | - | - | - | 59.2 | - | 6.4 | - | - | - | - | - | - |
| 1661000 | Chaptico Creek at Chaptico, MD | 7.1 | 0.2 | 0 | 56.3 | 0 | 1.9 | 11.8 | 0.4 | 37 | 49.6 | 0 | 3.3 |
| 1661050 | St. Clements Creek near Clements, MD | 5.8 | 0.1 | 0 | 58.1 | 0 | 1.8 | 7.8 | 0 | 34.8 | 55.9 | 0 | 2.3 |
| 1661430 | Glebe Branch at Valley Lee, MD | 8.4 | 0 | 0 | 20.2 | 0 | 2.1 | 33.4 | 0 | 24 | 42.5 | 0 | 8.4 |
| 1661500 | St. Marys River at Great Mills, MD | 8.1 | 1.4 | 0 | 72.1 | 1.4 | 4 | 10.7 | 2.3 | 13.5 | 68 | 1.4 | 6.1 |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | 0.3 | 0 | 0 | 95.3 | 0 | 0.1 | 2.9 | 0 | 4.4 | 90.7 | 0 | 0.7 |
| 3075500 | Youghiogheny River near Oakland, MD | 3.3 | 0.6 | 0 | 44.3 | 0.4 | 1.6 | 5.3 | 0.9 | 45 | 44.4 | 0.5 | 2.5 |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | 0 | 0 | 0 | 61.2 | 0 | 0 | 0 | 0 | 44.5 | 55.5 | 0 | 0 |
| 3076500 | Youghiogheny River at Friendsville, MD | 2.8 | 0.5 | 0 | 60.6 | 3.6 | 1.3 | 5 | 0.6 | 27.7 | 59.1 | 3.8 | 2.1 |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | - | - | - | 72.5 | - | 0 | - | - | - | - | - | - |
| 3076600 | Bear Creek at Friendsville, MD | 0.5 | 0.1 | 0 | 59.9 | 0 | 0.3 | 1.8 | 0.2 | 37.2 | 58.3 | 0 | 0.9 |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | 0 | 0 | 0 | 95.4 | 0 | 0 | 0 | 0 | 0.3 | 92.9 | 0 | 0 |
| 3078000 | Casselman River at Grantsville, MD | 0.8 | 0.4 | 0 | 64.9 | 1 | 0.8 | 1.1 | 0.3 | 26.3 | 63.6 | 1.3 | 0.8 |

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Res97 (%) | Com97 (%) | Ag97 (%) | For97 (%) | St97 (%) | IA97 (%) | St00 (%) | For00 (%) | IA00 (%) | St02 (%) | For02 (%) | IA02 (%) |
|----------------|---|-----------|-----------|----------|-----------|----------|----------|----------|-----------|----------|----------|-----------|----------|
| 1653500 | Henson Creek at Oxon Hill, MD | 47 | 12 | 2.2 | 23.4 | 0 | 34.8 | - | - | - | - | - | - |
| 1653600 | Piscataway Creek at Piscataway, MD | 23.2 | 1.2 | 17.6 | 48.3 | 0.2 | 11.6 | - | - | - | - | - | - |
| 1658000 | Mattawoman Creek near Pomonkey, MD | 21.2 | 3.8 | 15.8 | 55.4 | 0.1 | 10 | - | - | - | - | - | - |
| 1660900 | Wolf Den Branch near Cedarville, MD | 12.3 | 0 | 9.5 | 64.2 | 0 | 6.2 | - | - | - | - | - | - |
| 1660920 | Zekiah Swamp Run near Newtown, MD | 12.4 | 2.4 | 22.7 | 56.8 | 0.2 | 6.7 | - | - | - | - | - | - |
| 1660930 | Clark Run near Bel Alton, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 1661000 | Chaptico Creek at Chaptico, MD | 14.9 | 0.9 | 34.9 | 47.9 | 0 | 4.6 | - | - | - | - | - | - |
| 1661050 | St. Clements Creek near Clements, MD | 11.5 | 0.1 | 31.8 | 55 | 0 | 3.4 | - | - | - | - | - | - |
| 1661430 | Glebe Branch at Valley Lee, MD | 36.9 | 0 | 25.4 | 37.6 | 0 | 9.2 | - | - | - | - | - | - |
| 1661500 | St. Marys River at Great Mills, MD | 15.6 | 4.9 | 10.9 | 63.4 | 1.7 | 9.4 | - | - | - | - | - | - |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | 7.1 | 0 | 2.8 | 87.7 | 0 | 1.8 | - | - | - | - | - | - |
| 3075500 | Youghiogheny River near Oakland, MD | 8.1 | 1.4 | 42.8 | 46.5 | 0.4 | 3.7 | 0.6 | 44.4 | 4.5 | 0.9 | 45.6 | 4.5 |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | 0 | 0 | 44.4 | 55.6 | 0 | 0 | - | - | - | - | - | - |
| 3076500 | Youghiogheny River at Friendsville, MD | 7.5 | 1.1 | 26.5 | 60.2 | 3.7 | 3.2 | 4.1 | 57.4 | 4.1 | 4.3 | 58.5 | 3.7 |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | - | - | - | - | - | - | - | - | - | - | - | - |
| 3076600 | Bear Creek at Friendsville, MD | 3.2 | 0.2 | 31.2 | 64.9 | 0 | 1.3 | 0.1 | 62.3 | 2.2 | 0.1 | 62.4 | 2.4 |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | 1 | 0 | 0.3 | 91.8 | 0 | 0.2 | - | - | - | - | - | - |
| 3078000 | Casselman River at Grantsville, MD | 3.3 | 0.4 | 25.2 | 68.3 | 1.3 | 1.4 | 1.3 | 68.2 | 1.6 | 1.5 | 68.8 | 1.7 |

* Gaging station not used in regression analysis

Appendix 1: Watershed Properties for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | St10 (%) | For10 (%) | IA10 (%) | CN70 | CN97 | Hyd. A (%) | Hyd. B (%) | Hyd. C (%) | Hyd. D (%) | Province |
|----------------|---|----------|-----------|----------|------|------|------------|------------|------------|------------|----------|
| 1653500 | Henson Creek at Oxon Hill, MD | - | - | - | 82.1 | 81.4 | 0.3 | 46.6 | 30.6 | 22.5 | W |
| 1653600 | Piscataway Creek at Piscataway, MD | - | - | - | 78.1 | 76.2 | 1 | 52.7 | 32.5 | 13.7 | W |
| 1658000 | Mattawoman Creek near Pomonkey, MD | - | - | - | 74.6 | 75.2 | 0.3 | 24.7 | 52.2 | 22.5 | W |
| 1660900 | Wolf Den Branch near Cedarville, MD | - | - | - | 72.7 | 73.2 | 0 | 34.5 | 53.5 | 11.2 | W |
| 1660920 | Zekiah Swamp Run near Newtown, MD | - | - | - | 76.1 | 75.4 | 1.2 | 36.6 | 42.5 | 19.3 | W |
| 1660930 | Clark Run near Bel Alton, MD | - | - | - | - | - | 0.9 | 31.6 | 48.7 | 18.2 | W |
| 1661000 | Chaptico Creek at Chaptico, MD | - | - | - | 75 | 76.7 | 19.9 | 36.9 | 29.4 | 13.8 | W |
| 1661050 | St. Clements Creek near Clements, MD | - | - | - | 74.7 | 75.6 | 15.3 | 38.3 | 31 | 15.4 | W |
| 1661430 | Glebe Branch at Valley Lee, MD | - | - | - | 82.8 | 79.1 | 1.4 | 55.2 | 35.9 | 7.2 | W |
| 1661500 | St. Marys River at Great Mills, MD | - | - | - | 72.1 | 74 | 8.2 | 21.7 | 56.6 | 13.4 | W |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | - | - | - | 64 | 65.2 | 0 | 12.5 | 55.8 | 31.7 | A |
| 3075500 | Youghiogheny River near Oakland, MD | 0.5 | 28.4 | 3 | 68.7 | 70.9 | 0 | 14.7 | 69.3 | 15.3 | A |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | - | - | - | 68.1 | 71.6 | 0 | 22.4 | 74.7 | 3 | A |
| 3076500 | Youghiogheny River at Friendsville, MD | 3.3 | 46.1 | 3.1 | 67.3 | 68.6 | 0 | 18.7 | 66.5 | 12.1 | A |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | - | - | - | - | - | 0 | 14 | 86 | 0 | A |
| 3076600 | Bear Creek at Friendsville, MD | 0.1 | 63.6 | 2.9 | 68.8 | 69.4 | 0 | 34.5 | 62.7 | 2.7 | A |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | - | - | - | 60.1 | 60 | 0 | 58.8 | 29 | 12.2 | A |
| 3078000 | Casselman River at Grantsville, MD | 1.3 | 64.4 | 2.2 | 65.9 | 66.9 | 0 | 12.5 | 73.5 | 13.7 | A |

* Gaging station not used in regression analysis

Blank page inserted to preserve left-right pagination format.

**APPENDIX 2
FLOOD FREQUENCY RESULTS
FOR USGS GAGES
IN MARYLAND**

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|--|-----------------|---------------------------------|-------|-------|-------|-------|-------|-------|-------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1483200 | Blackbird Creek at Blackbird, DE | 47 | 84 | 109 | 145 | 264 | 368 | 531 | 678 | 849 | 1,050 | 1,360 |
| 1483500 | Leipsic River near Cheswold, DE | 33 | 125 | 161 | 216 | 414 | 608 | 947 | 1,290 | 1,710 | 2,260 | 3,190 |
| 1483720 | Puncheon Branch at Dover, DE | | 91 | 115 | 148 | 258 | 354 | 507 | 646 | 810 | 1,000 | 1,310 |
| 1484000 | Murderkill River near Felton, DE | 31 | 191 | 241 | 312 | 540 | 737 | 1,050 | 1,330 | 1,650 | 2,040 | 2,640 |
| 1484002 | Murderkill River Tributary near Felton, DE | | 12 | 15 | 19 | 32 | 45 | 66 | 87 | 113 | 146 | 200 |
| 1484050 | Pratt Branch near Felton, DE | | 38 | 48 | 62 | 112 | 158 | 236 | 312 | 404 | 518 | 709 |
| 1484100 | Beaverdam Branch at Houston, DE | 42 | 33 | 41 | 51 | 80 | 103 | 134 | 159 | 187 | 216 | 259 |
| 1484300 | Sowbridge Branch near Milton, DE | | 25 | 29 | 36 | 56 | 72 | 98 | 120 | 146 | 176 | 223 |
| 1484500 | Stockley Branch at Stockly, DE | 57 | 45 | 56 | 70 | 114 | 152 | 209 | 261 | 320 | 387 | 493 |
| 1485000 | Pocomoke River near Willards, MD | 50 | 530 | 609 | 715 | 1,030 | 1,290 | 1,670 | 2,000 | 2,380 | 2,800 | 3,460 |
| 1485500 | Nassawango Creek near Snow Hill, MD | 49 | 348 | 447 | 586 | 1,030 | 1,410 | 1,990 | 2,510 | 3,110 | 3,790 | 4,860 |
| 1486000 | Manokin Branch near Princess Anne, MD | 46 | 82 | 107 | 142 | 248 | 333 | 458 | 565 | 682 | 812 | 1,000 |
| 1486100 | Andrews Branch near Delmar, MD | 10 | 55 | 75 | 90 | 143 | 191 | 272 | 347 | 439 | 560 | 741 |
| 1486980 | Toms Dam Branch near Greenwood, DE | | 25 | 31 | 38 | 59 | 75 | 98 | 117 | 137 | 159 | 191 |
| 1487000 | Nanticoke River near Bridgeville, DE | 56 | 380 | 487 | 643 | 1,160 | 1,630 | 2,390 | 3,090 | 3,930 | 4,940 | 6,560 |
| 1487900 | Meadow Branch near Delmar, DE | 9 | 64 | 68 | 77 | 106 | 140 | 207 | 278 | 370 | 490 | 710 |
| 1488500 | Marshyhope Creek near Adamsville, DE | 54 | 583 | 778 | 1,050 | 1,900 | 2,580 | 3,580 | 4,430 | 5,360 | 6,390 | 7,890 |
| 1489000 | Faulkner Branch near Federalsburg, MD | 42 | 106 | 172 | 241 | 558 | 873 | 1,420 | 1,940 | 2,590 | 3,380 | 4,670 |
| 1490000 | Chicamacomico River near Salem, MD | 29 | 138 | 175 | 227 | 401 | 558 | 814 | 1,050 | 1,340 | 1,690 | 2,250 |
| 1490600 | Meredith Branch Near Sandtown, DE | 10 | 134 | 164 | 208 | 356 | 491 | 715 | 931 | 1,190 | 1,510 | 2,040 |
| 1490800 | Oldtown Branch at Goldsboro, MD | 10 | 111 | 139 | 176 | 289 | 379 | 512 | 626 | 752 | 893 | 1,100 |
| 1491000 | Choptank River near Greensboro, MD | 52 | 1,040 | 1,380 | 1,860 | 3,340 | 4,550 | 6,320 | 7,830 | 9,500 | 11,300 | 14,100 |
| 1491010 | Sangston Prong near Whiteleysburg, DE | | 35 | 47 | 66 | 145 | 232 | 404 | 595 | 860 | 1,220 | 1,920 |
| 1491050 | Spring Branch near Greensboro, MD | 10 | 41 | 51 | 66 | 120 | 172 | 265 | 357 | 475 | 625 | 880 |
| 1492000 | Beaverdam Branch at Matthews, MD | 32 | 151 | 210 | 271 | 538 | 802 | 1,270 | 1,740 | 2,345 | 3,110 | 4,440 |
| 1492050 | Gravel Run at Beulah, MD | 10 | 64 | 87 | 111 | 215 | 317 | 497 | 679 | 910 | 1,200 | 1,720 |
| 1492500 | Sallie Harris Creek near Carmicheal, MD | 30 | 114 | 155 | 219 | 452 | 680 | 1,070 | 1,460 | 1,930 | 2,520 | 3,510 |
| 1492550 | Mill Creek near Skipton, MD | 11 | 76 | 92 | 113 | 186 | 252 | 362 | 466 | 593 | 748 | 1,000 |
| 1493000 | Unicorn Branch near Millington, MD | | 183 | 244 | 332 | 626 | 883 | 1,290 | 1,650 | 2,080 | 2,570 | 3,340 |

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|--|-----------------|---------------------------------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1493500 | Morgan Creek near Kennedyville, MD | 49 | 187 | 258 | 372 | 845 | 1,370 | 2,410 | 3,550 | 5,120 | 7,270 | 11,300 |
| 1494000 | Southeast Creek at Church Hill, DE | 14 | 287 | 362 | 471 | 835 | 1,160 | 1,690 | 2,190 | 2,780 | 3,500 | 4,660 |
| 1495000 | Big Elk Creek at Elk Mills, MD | 80 | 1,790 | 2,250 | 2,890 | 4,850 | 6,450 | 8,860 | 10,950 | 13,300 | 16,000 | 20,000 |
| 1495500 | Little Elk Creek at Childs, MD | 12 | 1,320 | 1,440 | 1,650 | 2,440 | 3,230 | 4,650 | 6,100 | 7,990 | 10,400 | 14,800 |
| 1496000 | Northeast River at Leslie, MD | 37 | 1,010 | 1,220 | 1,540 | 2,530 | 3,400 | 4,760 | 6,010 | 7,480 | 9,220 | 12,000 |
| 1496080 | Northeast River tributary near Charlestown, MD | 10 | 125 | 212 | 280 | 491 | 668 | 935 | 1,170 | 1,430 | 1,730 | 2,190 |
| 1496200 | Principio Creek near Principio Furnace, MD | 27 | 617 | 808 | 1,090 | 2,120 | 3,110 | 4,820 | 6,490 | 8,590 | 11,200 | 15,600 |
| 1577940 | Broad Creek tributary at Whiteford, MD | 16 | 92 | 118 | 156 | 293 | 427 | 663 | 899 | 1,200 | 1,580 | 2,240 |
| 1578500 | Octoraro Creek near Rising Sun, MD | 19 | 2,490 | 3,280 | 4,480 | 8,920 | 13,400 | 21,200 | 29,200 | 39,500 | 52,500 | 75,300 |
| 1578800 | Basin Run at West Nottingham, MD | 10 | 272 | 340 | 432 | 700 | 909 | 1,210 | 1,460 | 1,730 | 2,030 | 2,460 |
| 1579000 | Basin Run at Liberty Grove, MD | 22 | 441 | 591 | 816 | 1,600 | 2,330 | 3,540 | 4,700 | 6,090 | 7,780 | 10,500 |
| 1580000 | Deer Creek at Rocks, MD | 86 | 2,430 | 2,950 | 3,660 | 5,700 | 7,290 | 9,580 | 11,500 | 13,600 | 15,900 | 19,400 |
| 1580200 | Deer Creek at Kalmia, MD | 11 | 2,890 | 3,580 | 4,550 | 7,610 | 10,200 | 14,200 | 17,800 | 21,900 | 26,700 | 34,200 |
| 1581500 | Bynum Run at Bel Air, MD | 38 | 756 | 962 | 1,250 | 2,140 | 2,870 | 3,960 | 4,910 | 5,980 | 7,180 | 9,000 |
| 1581700 | Winter Run near Benson, MD | 45 | 1,270 | 1,830 | 2,600 | 4,800 | 6,360 | 8,340 | 9,790 | 11,200 | 12,600 | 14,300 |
| 1581752◆ | Plumtree Creek near Bel Air, MD | 11 | 276 | 365 | 502 | 1,010 | 1,530 | 2,440 | 3,370 | 4,560 | 6,090 | 8,740 |
| 1581810◆ | Gunpowder Falls at Hoffmanville, MD | 12 | 686 | 897 | 1,220 | 2,360 | 3,470 | 5,410 | 7,320 | 9,720 | 12,700 | 17,900 |
| 1581830◆* | Grave Run near Beckleysville, MD | 13 | 168 | 226 | 313 | 618 | 905 | 1,380 | 1,840 | 2,400 | 3,070 | 4,180 |
| 1581870◆ | Georges Run near Beckleysville, MD | 13 | 531 | 690 | 930 | 1,810 | 2,670 | 4,190 | 5,700 | 7,630 | 10,100 | 14,300 |
| 1581940◆ | Mingo Branch near Hereford, MD | 10 | 36 | 53 | 83 | 225 | 495 | 730 | 1,140 | 1,700 | 2,500 | 4,100 |
| 1581960◆ | Beetree Run at Bentley Springs, MD | 13 | 491 | 618 | 794 | 1,320 | 1,740 | 2,370 | 2,900 | 3,490 | 4,150 | 5,140 |
| 1582000 | Little Falls at Blue Mount, MD | 69 | 1,500 | 1,820 | 2,270 | 3,570 | 4,600 | 6,100 | 7,380 | 8,790 | 10,400 | 12,700 |
| 1582510 | Piney Creek near Hereford, MD | 14 | 112 | 178 | 288 | 715 | 1,140 | 1,840 | 2,500 | 3,280 | 4,190 | 5,620 |
| 1583000* | Slade Run near Glyndon, MD | 36 | 97 | 119 | 150 | 244 | 320 | 434 | 534 | 646 | 774 | 968 |
| 1583100 | Piney Run at Dover, MD | 23 | 524 | 636 | 796 | 1,310 | 1,760 | 2,460 | 3,110 | 3,880 | 4,780 | 6,230 |
| 1583495 | Western Run tributary at Western Run, MD | 10 | 52 | 77 | 116 | 249 | 367 | 547 | 705 | 881 | 1,080 | 1,370 |
| 1583500 | Western Run at Western Run, MD | 68 | 1,240 | 1,630 | 2,210 | 4,330 | 6,420 | 10,100 | 13,800 | 18,500 | 24,400 | 34,800 |

◆ New gaging station added since 2010 analysis.

* Gaging station not used in regression analysis.

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|---|-----------------|---------------------------------|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1583570* | Pond Branch at Oregon Ridge, MD | 17 | 2.4 | 3.3 | 4.6 | 9.5 | 14 | 22 | 31 | 41 | 53 | 74 |
| 1583580 | Baisman Run at Broadmoor, MD | 26 | 45 | 68 | 107 | 268 | 443 | 768 | 1,110 | 1,550 | 2,110 | 3,100 |
| 1583600* | Beaverdam Run at Cockeysville, MD | 29 | 787 | 938 | 1,140 | 1,700 | 2,130 | 2,730 | 3,220 | 3,760 | 4,340 | 5,190 |
| 158397967♦ | Minebank Run near Glen Arm, MD | 11 | 500 | 625 | 789 | 1,260 | 1,610 | 2,110 | 2,520 | 2,960 | 3,430 | 4,100 |
| 1584050 | Long Green Creek at Glen Arm, MD | 37 | 310 | 441 | 645 | 1,400 | 2,150 | 3,440 | 4,690 | 6,240 | 8,140 | 11,300 |
| 1584500 | Little Gunpowder Falls at Laurel Brook, MD | 72 | 1,460 | 1,930 | 2,610 | 4,790 | 6,630 | 9,440 | 11,900 | 14,700 | 17,900 | 22,700 |
| 1585090 | Whitemarsh Run near Fullerton, MD | 18 | 704 | 844 | 1,020 | 1,480 | 1,790 | 2,200 | 2,520 | 2,840 | 3,170 | 3,620 |
| 1585095♦ | Nork Fork Whitemarsh Run near White Marsh, MD | 17 | 320 | 340 | 405 | 680 | 980 | 1,500 | 2,050 | 2,700 | 3,600 | 5,000 |
| 1585100 | White Marsh Run at White Marsh, MD | 40 | 1,140 | 1,370 | 1,690 | 2,670 | 3,490 | 4,740 | 5,840 | 7,100 | 8,550 | 10,800 |
| 1585104♦ | Honeygo Run near White Marsh, MD | 13 | 337 | 415 | 521 | 838 | 1,090 | 1,470 | 1,790 | 2,140 | 2,540 | 3,140 |
| 1585200 | West Branch Herring Run at Idlewylde, MD | 46 | 421 | 559 | 749 | 1,300 | 1,720 | 2,310 | 2,770 | 3,270 | 3,780 | 4,520 |
| 1585225♦ | Moores Run Tributary near Todd Ave at Baltimore, MD | 16 | 134 | 142 | 156 | 210 | 260 | 333 | 400 | 475 | 560 | 680 |
| 1585230♦ | Moores Run at Radecke Ave at Baltimore, MD | 16 | 1,400 | 1,680 | 2,040 | 3,030 | 3,760 | 4,760 | 5,560 | 6,410 | 7,320 | 8,630 |
| 1585300 | Stemmers Run at Rossville, MD | 29 | 788 | 982 | 1,250 | 2,070 | 2,740 | 3,750 | 4,630 | 5,620 | 6,740 | 8,450 |
| 1585400 | Brien Run at Stemmers Run, MD | 29 | 188 | 237 | 316 | 633 | 984 | 1,680 | 2,450 | 3,530 | 5,030 | 7,930 |
| 1585500 | Cranberry Branch near Westminster, MD | 64 | 117 | 166 | 243 | 538 | 836 | 1,370 | 1,900 | 2,570 | 3,410 | 4,860 |
| 1586000 | North Branch Patapsco River at Cedarhurst, MD | 67 | 1,520 | 1,850 | 2,360 | 4,100 | 5,750 | 8,560 | 11,300 | 14,700 | 19,000 | 26,300 |
| 1586210* | Beaver Run near Finksburg, MD | 30 | 451 | 572 | 739 | 1,240 | 1,650 | 2,250 | 2,760 | 3,320 | 3,960 | 4,900 |
| 1586610 | Morgan Run near Louisville, MD | 30 | 711 | 928 | 1,240 | 2,230 | 3,070 | 4,360 | 5,510 | 6,810 | 8,310 | 10,600 |
| 1587000 | North Branch Patapsco River near Marriottsville, MD | 24 | 2,270 | 2,840 | 3,660 | 6,360 | 8,770 | 12,600 | 16,300 | 20,600 | 25,700 | 34,000 |
| 1587050 | Hay Meadow Branch tributary at Poplar Springs, MD | 11 | 68 | 91 | 126 | 255 | 384 | 615 | 849 | 1,150 | 1,530 | 2,200 |
| 1587500 | South Branch Patapsco River at Henryton, MD | 32 | 1,520 | 1,990 | 2,720 | 5,510 | 8,380 | 13,600 | 19,100 | 26,200 | 35,500 | 52,100 |
| 1588000 | Piney Run near Sykesville, MD | 43 | 332 | 463 | 674 | 1,520 | 2,440 | 4,160 | 6,000 | 8,440 | 11,700 | 17,500 |
| 1589000 | Patapsco River at Hollofield, MD | 23 | 6,120 | 7,920 | 10,500 | 18,800 | 26,000 | 37,300 | 47,400 | 59,100 | 72,700 | 93,900 |
| 1589100 | East Branch Herbert Run at Arbutus, MD | 47 | 465 | 540 | 645 | 986 | 1,280 | 1,760 | 2,190 | 2,710 | 3,320 | 4,320 |
| 1589180♦ | Gwynns Falls at Glyndon, MD | 14 | 58 | 66 | 85 | 175 | 265 | 430 | 630 | 880 | 1,200 | 1,800 |
| 1589197♦ | Gwynns Falls near Delight, MD | 14 | 495 | 548 | 636 | 995 | 1,380 | 2,110 | 2,900 | 3,980 | 5,440 | 8,230 |

* Gaging station not used in regression analysis.

♦ New gaging station added since 2010 analysis.

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|---|-----------------|---------------------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1589200 | Gwynns Falls near Owings Mills, MD | 17 | 147 | 190 | 262 | 596 | 1,020 | 1,970 | 3,160 | 5,010 | 7,850 | 14,000 |
| 1589238* | Gwynns Falls Tributary at McDonough, MD | 13 | 1.5 | 2.8 | 5.7 | 27 | 66 | 184 | 371 | 717 | 1,340 | 2,940 |
| 1589240 | Gwynns Falls at McDonough, MD | 12 | 599 | 787 | 1,080 | 2,210 | 3,400 | 5,600 | 7,910 | 11,000 | 15,000 | 22,300 |
| 1589300 | Gwynns Falls at Villa Nova, MD | 34 | 1,310 | 1,580 | 2,000 | 3,640 | 5,360 | 8,610 | 12,100 | 16,800 | 23,200 | 35,100 |
| 1589330 | Dead Run at Franklinton, MD | 31 | 1,260 | 1,490 | 1,830 | 2,980 | 4,040 | 5,820 | 7,540 | 9,670 | 12,300 | 16,700 |
| 1589352♦ | Gwynns Falls at Washington Blvd at Baltimore, MD | 14 | 4,730 | 5,920 | 7,580 | 12,900 | 17,400 | 24,400 | 30,700 | 38,000 | 46,500 | 59,700 |
| 1589440 | Jones Fall at Sorrento, MD | 47 | 636 | 830 | 1,150 | 2,500 | 4,080 | 7,320 | 11,100 | 16,500 | 24,200 | 39,700 |
| 1589464 | Stony Run at Ridgemedede Road at Baltimore, MD | 9 | 420 | 538 | 703 | 1,200 | 1,610 | 2,210 | 2,730 | 3,310 | 3,950 | 4,910 |
| 1589500 | Sawmill Creek at Glen Burnie, MD | 40 | 48 | 60 | 77 | 125 | 162 | 216 | 260 | 308 | 360 | 435 |
| 1589795 | South Fork Jabez Branch at Millersville, MD | 13 | 36 | 53 | 83 | 213 | 362 | 659 | 987 | 1,440 | 2,050 | 3,180 |
| 1590000 | North River near Annapolis, MD | 42 | 82 | 110 | 139 | 278 | 429 | 720 | 1,040 | 1,480 | 2,080 | 3,210 |
| 1590500 | Bacon Ridge Branch at Chesterfield, MD | 35 | 112 | 156 | 202 | 397 | 586 | 912 | 1,230 | 1,635 | 2,140 | 2,990 |
| 1591000 | Patuxent River near Unity, MD | 68 | 768 | 1,050 | 1,510 | 3,310 | 5,230 | 8,840 | 12,700 | 17,700 | 24,400 | 36,500 |
| 1591400 | Cattail Creek near Glenwood, MD | 46 | 669 | 846 | 1,100 | 1,960 | 2,720 | 3,960 | 5,110 | 6,490 | 8,140 | 10,800 |
| 1591700 | Hawlings River near Sandy Springs, MD | 34 | 652 | 895 | 1,260 | 2,530 | 3,700 | 5,610 | 7,390 | 9,510 | 12,000 | 16,000 |
| 1592000* | Patuxent River near Burtonsville, MD | 32 | 1,770 | 2,100 | 2,560 | 3,950 | 5,080 | 6,780 | 8,260 | 9,950 | 11,900 | 14,800 |
| 1593350 | Little Patuxent River tributary at Guilford Downs, MD | 11 | 94 | 130 | 185 | 382 | 572 | 896 | 1,210 | 1,600 | 2,070 | 2,850 |
| 1593500* | Little Patuxent River at Guilford, MD | 80 | 892 | 1,100 | 1,440 | 2,620 | 3,780 | 5,820 | 7,880 | 10,500 | 13,900 | 19,700 |
| 1594000 | Little Patuxent River at Savage, MD | 59 | 2,090 | 2,660 | 3,500 | 6,370 | 9,000 | 13,400 | 17,500 | 22,500 | 28,600 | 38,600 |
| 1594400 | Dorsey Run near Jessup, MD | 19 | 324 | 386 | 451 | 683 | 876 | 1,180 | 1,440 | 1,750 | 2,110 | 2,680 |
| 1594440 | Patuxent River near Bowie, MD | 31 | 3,260 | 4,050 | 5,150 | 8,710 | 11,800 | 16,700 | 21,200 | 26,500 | 32,600 | 42,500 |
| 1594445 | Mill Branch near Mitchellville, MD | 10 | 93 | 123 | 154 | 278 | 391 | 580 | 759 | 977 | 1,240 | 1,680 |
| 1594500 | Western Branch near Largo, MD | 25 | 638 | 762 | 892 | 1,270 | 1,545 | 1,910 | 2,200 | 2,510 | 2,830 | 3,280 |
| 1594526 | Western Branch at Upper Marlboro, MD | 19 | 1,070 | 1,450 | 2,040 | 4,390 | 6,880 | 11,600 | 16,600 | 23,300 | 32,100 | 48,300 |
| 1594600 | Cocktown Creek near Huntington, MD | 19 | 71 | 105 | 142 | 327 | 537 | 958 | 1,430 | 2,085 | 2,990 | 4,730 |
| 1594670 | Hunting Creek near Huntingtown, MD | 10 | 156 | 208 | 262 | 452 | 609 | 846 | 1,050 | 1,290 | 1,550 | 1,950 |

♦ New gaging station added since 2010 analysis

* Gaging station not used in regression analysis.

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|---|-----------------|---------------------------------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1594710 | Killpeck Creek at Huntersville, MD | 12 | 123 | 140 | 158 | 209 | 244 | 290 | 326 | 363 | 402 | 457 |
| 1594800 | St. Leonard Creek near St. Leonard, MD | 14 | 62 | 77 | 98 | 159 | 208 | 282 | 345 | 416 | 496 | 616 |
| 1594930 | Laurel Run at Dobbin Road near Wilson, MD | 26 | 253 | 308 | 381 | 581 | 729 | 934 | 1,100 | 1,270 | 1,460 | 1,730 |
| 1594936 | North Fork Sand Run near Wilson, MD | 28 | 69 | 92 | 127 | 258 | 389 | 624 | 861 | 1,170 | 1,550 | 2,230 |
| 1594950 | McMillan Fork near Fort Pendleton, MD | 25 | 76 | 98 | 130 | 242 | 345 | 517 | 681 | 880 | 1,120 | 1,530 |
| 1596005 | Savage River near Frostburg, MD | 14 | 20 | 39 | 50 | 82 | 107 | 144 | 177 | 212 | 252 | 312 |
| 1596500 | Savage River near Barton, MD | 64 | 1,060 | 1,250 | 1,520 | 2,380 | 3,100 | 4,220 | 5,240 | 6,420 | 7,800 | 10,000 |
| 1597000 | Crabtree Creek near Swanton, MD | 33 | 305 | 378 | 485 | 844 | 1,170 | 1,720 | 2,230 | 2,860 | 3,630 | 4,900 |
| 1598000 | Savage River at Bloomington, MD | 24 | 2,180 | 2,710 | 3,450 | 5,880 | 8,030 | 11,500 | 14,600 | 18,400 | 22,900 | 30,100 |
| 1599000 | Georges Creek at Franklin, MD | 82 | 1,270 | 1,520 | 1,880 | 2,970 | 3,890 | 5,310 | 6,580 | 8,040 | 9,730 | 12,400 |
| 1601500 | Wills Creek near Cumberland, MD | 83 | 4,140 | 4,900 | 6,040 | 10,100 | 14,000 | 20,900 | 27,800 | 36,600 | 47,800 | 67,500 |
| 1609000 | Town Creek near Oldtown, MD | 33 | 2,490 | 3,120 | 3,970 | 6,510 | 8,540 | 11,500 | 14,000 | 16,800 | 19,900 | 24,500 |
| 1609500 | Sawpit Run near Oldtown, MD | 25 | 190 | 223 | 267 | 398 | 502 | 657 | 789 | 938 | 1,110 | 1,360 |
| 1610105 | Pratt Hollow Tributary at Pratt, MD | 15 | 41 | 46 | 54 | 74 | 88 | 107 | 121 | 137 | 153 | 176 |
| 1610150 | Bear Creek at Forest Park, MD | 18 | 219 | 283 | 375 | 666 | 912 | 1,290 | 1,620 | 2,000 | 2,440 | 3,110 |
| 1610155 | Sideling Hill Creek near Bellegrove, MD | 24 | 2,180 | 2,880 | 3,860 | 6,930 | 9,460 | 13,200 | 16,400 | 20,000 | 24,100 | 30,000 |
| 1612500 | Little Tonoloway Creek near Hancock, MD | 17 | 315 | 399 | 518 | 896 | 1,220 | 1,720 | 2,160 | 2,680 | 3,280 | 4,210 |
| 1613150 | Ditch Run near Hancock, MD | 22 | 155 | 189 | 236 | 376 | 489 | 656 | 800 | 960 | 1,140 | 1,410 |
| 1613160 | Potomac River Tributary near Hancock, MD | 12 | 60 | 74 | 94 | 151 | 197 | 263 | 319 | 380 | 448 | 550 |
| 1614500 | Conococheague Creek at Fairview, MD | 85 | 5,380 | 6,340 | 7,620 | 11,400 | 14,400 | 18,700 | 22,400 | 26,600 | 31,200 | 38,200 |
| 1617800* | Marsh Run at Grimes, MD | 48 | 58 | 76 | 102 | 187 | 262 | 382 | 490 | 618 | 768 | 1,000 |
| 1619000 | Antietam Creek near Waynesboro, PA | 27 | 986 | 1,210 | 1,540 | 2,570 | 3,460 | 4,880 | 6,160 | 7,670 | 9,450 | 12,300 |
| 1619475 | Dog Creek tributary near Locust Grove, MD | 11 | 11 | 15 | 21 | 44 | 68 | 109 | 152 | 207 | 276 | 398 |
| 1619500 | Antietam Creek near Sharpsburg, MD | 85 | 1,580 | 2,020 | 2,620 | 4,520 | 6,100 | 8,520 | 10,600 | 13,100 | 15,800 | 20,100 |
| 1637000 | Little Catoctin Creek at Harmony, MD | 30 | 268 | 387 | 584 | 1,410 | 2,320 | 4,080 | 5,980 | 8,530 | 11,900 | 18,100 |
| 1637500 | Catoctin Creek near Middletown, MD | 65 | 1,470 | 1,900 | 2,510 | 4,540 | 6,320 | 9,140 | 11,700 | 14,700 | 18,300 | 23,900 |
| 1637600 | Hollow Road Creek near Middletown, MD | 11 | 141 | 192 | 274 | 600 | 949 | 1,610 | 2,310 | 3,240 | 4,480 | 6,730 |

* Gaging station not used in regression analysis.

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|--|-----------------|---------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1639000 | Monocacy River at Bridgeport, MD | 72 | 6,690 | 7,580 | 8,740 | 12,000 | 14,400 | 17,800 | 20,600 | 23,600 | 26,900 | 31,700 |
| 1639095* | Piney Creek tributary at Taneytown, MD | 10 | 76 | 97 | 126 | 218 | 296 | 416 | 522 | 644 | 784 | 1,000 |
| 1639140◆ | Piney Creek near Taneytown, MD | 12 | 1,310 | 1,550 | 1,890 | 2,940 | 3,820 | 5,180 | 6,390 | 7,800 | 9,430 | 12,000 |
| 1639500 | Big Pipe Creek at Bruceville, MD | 65 | 2,250 | 2,700 | 3,360 | 5,560 | 7,550 | 10,900 | 14,000 | 17,800 | 22,400 | 30,100 |
| 1640000 | Little Pipe Creek at Bruceville, MD | 31 | 228 | 306 | 424 | 857 | 1,280 | 2,020 | 2,760 | 3,680 | 4,830 | 6,800 |
| 1640500 | Owens Creek at Lantz, MD | 53 | 179 | 255 | 378 | 876 | 1,410 | 2,420 | 3,490 | 4,910 | 6,760 | 10,100 |
| 1640700 | Owens Creek tributary near Rocky Ridge, MD | 11 | 102 | 136 | 190 | 396 | 609 | 1,000 | 1,410 | 1,950 | 2,670 | 3,920 |
| 1640965 | Hunting Creek near Foxville, MD | 13 | 59 | 80 | 115 | 251 | 392 | 653 | 925 | 1,280 | 1,740 | 2,570 |
| 1640970 | Hunting Creek tributary near Foxville, MD | 10 | 146 | 213 | 325 | 796 | 1,320 | 2,340 | 3,440 | 4,920 | 6,900 | 10,500 |
| 1641000 | Hunting Creek at Jimtown, MD | 43 | 482 | 624 | 821 | 1,400 | 1,860 | 2,520 | 3,060 | 3,650 | 4,300 | 5,230 |
| 1641500 | Fishing Creek near Lewistown, MD | 39 | 71 | 100 | 148 | 346 | 568 | 1,000 | 1,480 | 2,130 | 3,020 | 4,670 |
| 1642000 | Monocacy River near Frederick, MD | 35 | 13,000 | 14,800 | 16,900 | 22,600 | 26,500 | 31,700 | 35,700 | 39,900 | 44,300 | 50,400 |
| 1642400 | Dollyhyde Creek at Libertytown, MD | 10 | 232 | 314 | 440 | 891 | 1,320 | 2,070 | 2,780 | 3,670 | 4,760 | 6,580 |
| 1642500 | Lingamore Creek near Frederick, MD | 49 | 1,600 | 1,960 | 2,480 | 4,150 | 5,600 | 7,920 | 10,000 | 12,600 | 15,500 | 20,300 |
| 1643000 | Monocacy River at Jug Bridge near Frederick, MD | 84 | 13,900 | 15,900 | 18,600 | 26,600 | 33,000 | 42,400 | 50,400 | 59,300 | 69,300 | 84,500 |
| 1643395◆ | Soper Branch at Hyattstown, MD | 9 | 46 | 68 | 105 | 266 | 449 | 811 | 1,210 | 1,750 | 2,490 | 3,850 |
| 1643500 | Bennett Creek at Park Mills, MD | 62 | 1,500 | 1,900 | 2,520 | 4,780 | 7,060 | 11,200 | 15,400 | 20,900 | 28,000 | 40,600 |
| 1644371◆ | Little Seneca Creek Tributary near Clarksburg, MD | 9 | 87 | 106 | 134 | 241 | 347 | 538 | 734 | 990 | 1,320 | 1,920 |
| 1644375◆ | Little Seneca Creek Tributary near Germantown, MD | 9 | 93 | 128 | 184 | 411 | 660 | 1,140 | 1,660 | 2,360 | 3,310 | 5,060 |
| 1644380◆ | Cabin Branch near Boyd, MD | 9 | 45 | 88 | 175 | 530 | 830 | 1,320 | 1,800 | 2,300 | 2,900 | 3,850 |
| 1644420 | Bucklodge Branch tributary near Barnesville, MD | 10 | 53 | 70 | 97 | 189 | 275 | 419 | 557 | 725 | 928 | 1,260 |
| 1644600◆ | Great Seneca Creek near Quince Orchard, MD | 12 | 1,720 | 2,100 | 2,600 | 4,400 | 5,900 | 8,400 | 10,800 | 13,600 | 17,400 | 23,100 |
| 1645000 | Seneca Creek near Dawsonville, MD | 48 | 2,340 | 3,010 | 4,050 | 7,980 | 12,000 | 19,400 | 27,100 | 37,300 | 50,500 | 74,400 |
| 1645200 | Watts Branch at Rockville, MD | 30 | 341 | 454 | 622 | 1,210 | 1,760 | 2,680 | 3,560 | 4,620 | 5,910 | 8,040 |
| 1646550 | Little Falls Branch near Bethesda, MD | 40 | 492 | 657 | 887 | 1,570 | 2,110 | 2,860 | 3,480 | 4,140 | 4,850 | 5,860 |
| 1647720 | North Branch Rock Creek near Norbeck, MD | 11 | 520 | 660 | 850 | 1,700 | 2,600 | 4,350 | 7,500 | 9,200 | 13,500 | 27,000 |
| 1649500 | North East Branch Anacostia River at Riverdale, MD | 45 | 3,260 | 3,900 | 4,720 | 6,980 | 8,640 | 10,900 | 12,800 | 14,700 | 16,800 | 19,800 |

* Gaging station not used in regression analysis.

◆ New gaging station added since 2010 analysis.

Appendix 2: Flood Frequency Results for USGS Stream Gages in Maryland and Delaware

| Station Number | Station Name | Years of Record | Discharge in ft ³ /s | | | | | | | | | |
|----------------|---|-----------------|---------------------------------|-------|-------|-------|--------|--------|--------|--------|--------|--------|
| | | | Return Period (yr) | | | | | | | | | |
| | | | 1.25 | 1.5 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| 1650050 | Northwest Branch Anacostia River at Norwood, MD | 10 | 313 | 368 | 470 | 910 | 1,370 | 2,250 | 3,150 | 4,250 | 5,700 | 8,300 |
| 1650085 | Nursery Run at Cloverly, MD | 10 | 40 | 53 | 79 | 200 | 351 | 681 | 1,080 | 1,680 | 2,400 | 4,000 |
| 1650190 | Batchellors Run at Oakdale, MD | 10 | 94 | 128 | 181 | 380 | 582 | 945 | 1,310 | 1,790 | 2,390 | 3,440 |
| 1650500 | Northwest Branch Anacostia River near Colesville, MD | 75 | 829 | 1,000 | 1,280 | 2,320 | 3,400 | 5,400 | 7,530 | 10,400 | 14,200 | 21,200 |
| 1651000 | Northwest Branch Anacostia River near Hyattsville, MD | 47 | 2,580 | 3,190 | 4,050 | 6,870 | 9,350 | 13,300 | 17,000 | 21,300 | 26,400 | 34,700 |
| 1653500 | Henson Creek at Oxon Hill, MD | 30 | 753 | 970 | 1,200 | 1,990 | 2,650 | 3,650 | 4,530 | 5,520 | 6,660 | 8,390 |
| 1653600 | Piscataway Creek at Piscataway, MD | 42 | 586 | 770 | 1,060 | 2,240 | 3,540 | 6,060 | 8,830 | 12,600 | 17,900 | 27,800 |
| 1658000 | Mattawoman Creek near Pomonkey, MD | 45 | 638 | 910 | 1,330 | 2,920 | 4,480 | 7,160 | 9,770 | 13,000 | 17,000 | 23,500 |
| 1660900 | Wolf Den Branch near Cedarville, MD | 13 | 72 | 102 | 132 | 271 | 414 | 677 | 951 | 1,310 | 1,780 | 2,620 |
| 1660920 | Zekiah Swamp Run near Newtown, MD | 24 | 902 | 1,090 | 1,350 | 2,210 | 2,970 | 4,190 | 5,340 | 6,710 | 8,350 | 11,000 |
| 1660930 | Clark Run near Bel Alton, MD | 11 | 240 | 312 | 430 | 954 | 1,560 | 2,810 | 4,280 | 6,470 | 9,650 | 16,100 |
| 1661000 | Chaptico Creek at Chaptico, MD | 25 | 195 | 272 | 352 | 750 | 1,200 | 2,080 | 3,070 | 4,460 | 6,380 | 10,100 |
| 1661050 | St. Clements Creek near Clements, MD | 38 | 320 | 410 | 560 | 2,300 | 3,650 | 4,700 | 5,400 | 6,000 | 6,600 | 7,300 |
| 1661430 | Glebe Branch at Valley Lee, MD | 11 | 16 | 20 | 26 | 46 | 64 | 94 | 122 | 156 | 198 | 266 |
| 1661500 | St. Marys River at Great Mills, MD | 61 | 479 | 648 | 912 | 1,930 | 2,990 | 4,920 | 6,930 | 9,540 | 12,900 | 19,000 |
| 3075450 | Little Youghiogheny River tributary at Deer Park, MD | 12 | 20 | 23 | 28 | 41 | 51 | 68 | 74 | 91 | 105 | 140 |
| 3075500 | Youghiogheny River near Oakland, MD | 72 | 2,910 | 3,490 | 4,280 | 6,660 | 8,580 | 11,400 | 13,900 | 16,700 | 19,800 | 24,600 |
| 3075600 | Toliver Run tributary near Hoyes Run, MD | 22 | 18 | 23 | 30 | 54 | 75 | 111 | 144 | 184 | 232 | 310 |
| 3076500 | Youghiogheny River at Friendsville, MD | 89 | 4,570 | 5,360 | 6,350 | 8,920 | 10,700 | 13,100 | 14,900 | 16,800 | 18,700 | 21,400 |
| 3076505* | Youghiogheny River Tributary near Friendsville, MD | 12 | 9.4 | 10 | 12 | 16 | 18 | 21 | 23 | 26 | 28 | 31 |
| 3076600 | Bear Creek at Friendsville, MD | 48 | 1,150 | 1,370 | 1,640 | 2,040 | 2,340 | 3,600 | 4,800 | 5,400 | 5,800 | 6,400 |
| 3077700 | North Branch Casselman River tributary at Foxtown, MD | 12 | 18 | 25 | 36 | 78 | 145 | 220 | 320 | 450 | 640 | 1,000 |
| 3078000 | Casselman River at Grantsville, MD | 65 | 1,500 | 1,730 | 2,040 | 3,000 | 3,690 | 4,780 | 5,710 | 6,750 | 7,930 | 9,720 |

* Gaging station not used in regression analysis.

**APPENDIX 3
FIXED REGION REGRESSION
EQUATIONS FOR MARYLAND**

The Fixed Region regression equations are summarized for each hydrologic region and then the development of the equations is discussed.

Fixed Region Regression Equations for the Eastern Coastal Plain Region

The following equations are based on 28 stations in Maryland and Delaware with drainage area (DA) ranging from 0.91 to 113.7 square miles, percent A soils (S_A) ranging from 0.0 to 78.8 percent based on SSURGO soils data, and land slope (LSLOPE) ranging from 0.00250 to 0.0160 ft/ft. All variables are statistically significant at the 5-percent level of significance except LSLOPE for flood discharges less than the 5-year event but LSLOPE is included in the regression equations for consistency. The equations, standard error of estimate in percent, and equivalent years of record are as follows:

| Eastern Coastal Plain Region Fixed Region Regression Equation | Standard error (percent) | Equivalent years of record |
|--|--------------------------------|----------------------------------|
| $Q_{1.25} = 41.53 DA^{0.815} (SA+1)^{-0.139} LSLOPE^{0.115}$ | 32.4 | 4.6 |
| $Q_{1.50} = 78.75 DA^{0.824} (SA+1)^{-0.144} LSLOPE^{0.194}$ | 32.3 | 4.1 |
| $Q_2 = 134.0 DA^{0.836} (SA+1)^{-0.158} LSLOPE^{0.249}$ | 32.8 | 4.4 |
| $Q_5 = 477.5 DA^{0.847} (SA+1)^{-0.184} LSLOPE^{0.385}$ | 35.1 | 7.0 |
| $Q_{10} = 924.3 DA^{0.844} (SA+1)^{-0.196} LSLOPE^{0.445}$ | 36.7 | 9.7 |
| $Q_{25} = 1860.4 DA^{0.834} (SA+1)^{-0.212} LSLOPE^{0.499}$ | 39.3 | 13 |
| $Q_{50} = 2941.5 DA^{0.824} (SA+1)^{-0.222} LSLOPE^{0.531}$ | 41.6 | 15 |
| $Q_{100} = 4432.9 DA^{0.812} (SA+1)^{-0.230} LSLOPE^{0.557}$ | 44.2 | 17 |
| $Q_{200} = 6586.3 DA^{0.800} (SA+1)^{-0.237} LSLOPE^{0.582}$ | 47.2 | 18 |
| $Q_{500} = 10,587 DA^{0.783} (SA+1)^{-0.247} LSLOPE^{0.610}$ | 51.6 | 19 |

Fixed Region Regression Equations for the Western Coastal Plain Region

The following equations are based on 24 stations in the Western Coastal Plain region of Maryland with drainage area (DA) ranging from 0.41 to 349.6 square miles, impervious area ranging from 0.0 to 36.8 percent, and the sum of the percentage of C and D soils ranging from 13 to 74.7 percent based on SSURGO soils data.

Drainage area (DA) and sum of percentage C and D soils (S_{CD}) are significant at the 5-percent level (p-level) for all recurrence intervals. Impervious area (IA) is statistically significant at the 10-percent level up to the 100-year event (Q_{100}). For Q_{200} and Q_{500} , the p-level for IA is 0.1237 and 0.1763, respectively, but this variable was retained in the equations for consistency. The equations, standard error of estimate in percent, and equivalent years of record are as follows:

| Western Coastal Plain Region Fixed Region Regression Equation | Standard error (percent) | Equivalent years of record |
|--|--------------------------------|----------------------------------|
| $Q_{1.25} = 5.18 DA^{0.694} (IA+1)^{0.382} (S_{CD}+1)^{0.414}$ | 39.0 | 3.6 |
| $Q_{1.50} = 6.73 DA^{0.682} (IA+1)^{0.374} (S_{CD}+1)^{0.429}$ | 36.4 | 3.6 |
| $Q_2 = 7.61 DA^{0.678} (IA+1)^{0.362} (S_{CD}+1)^{0.475}$ | 33.2 | 4.6 |
| $Q_5 = 10.5 DA^{0.665} (IA+1)^{0.290} (S_{CD}+1)^{0.612}$ | 38.2 | 6.7 |
| $Q_{10} = 13.1 DA^{0.653} (IA+1)^{0.270} (S_{CD}+1)^{0.669}$ | 42.7 | 8.2 |
| $Q_{25} = 17.5 DA^{0.634} (IA+1)^{0.264} (S_{CD}+1)^{0.719}$ | 48.1 | 10 |
| $Q_{50} = 21.2 DA^{0.621} (IA+1)^{0.263} (S_{CD}+1)^{0.751}$ | 54.0 | 11 |
| $Q_{100} = 25.6 DA^{0.608} (IA+1)^{0.262} (S_{CD}+1)^{0.781}$ | 61.2 | 11 |
| $Q_{200} = 30.5 DA^{0.596} (IA+1)^{0.261} (S_{CD}+1)^{0.812}$ | 69.6 | 10 |
| $Q_{500} = 37.9 DA^{0.579} (IA+1)^{0.261} (S_{CD}+1)^{0.849}$ | 82.5 | 10 |

Fixed Region Regression Equations for Rural and Urban Watersheds in the Piedmont-Blue Ridge Region

The following equations are based on 64 rural and 32 urban stations in the combined Piedmont and Blue Ridge Regions with drainage area (DA) ranging from 0.11 to 816.4 square miles, percentage of carbonate/limestone rock (LIME) ranging from 0.0 to 81.7 percent, percentage of impervious area (IA) ranging 0.0 to 53.5 percent, and percentage of forest cover ranging from 0.5 to 100 percent. An impervious area of 10 percent area was used to classify watersheds as rural or urban. There were 10 stations identified as outliers and not used in developing the regression equations. Both rural and urban watersheds were included in the same analysis to avoid any discontinuities in estimates in transitioning from rural to urban watersheds. However, impervious area is not statistically significant above the 100-year flood and was not included in the 200- and 500-year equations. The equations, the standard error of estimate in percent, and the equivalent years of record are as follows:

| Piedmont-Blue Ridge Region Fixed Region Regression Equation | Standard error (percent) | Equivalent years of record |
|--|--------------------------------|----------------------------------|
| $Q_{1.25} = 283.3 DA^{0.724} (LIME+1)^{-0.124} (IA+1)^{0.143} (FOR+1)^{-0.412}$ | 44.3 | 2.8 |
| $Q_{1.50} = 352.4 DA^{0.704} (LIME+1)^{-0.131} (IA+1)^{0.123} (FOR+1)^{-0.373}$ | 40.9 | 3.2 |
| $Q_2 = 453.4 DA^{0.683} (LIME+1)^{-0.140} (IA+1)^{0.105} (FOR+1)^{-0.334}$ | 37.5 | 3.7 |
| $Q_5 = 746.8 DA^{0.640} (LIME+1)^{-0.158} (IA+1)^{0.083} (FOR+1)^{-0.249}$ | 31.9 | 9.2 |
| $Q_{10} = 972.3 DA^{0.615} (LIME+1)^{-0.169} (IA+1)^{0.076} (FOR+1)^{-0.195}$ | 29.6 | 16 |
| $Q_{25} = 1,327.6 DA^{0.593} (LIME+1)^{-0.182} (IA+1)^{0.074} (FOR+1)^{-0.145}$ | 29.0 | 25 |
| $Q_{50} = 1,608.2 DA^{0.576} (LIME+1)^{-0.191} (IA+1)^{0.073} (FOR+1)^{-0.103}$ | 29.8 | 31 |
| $Q_{100} = 1,928.5 DA^{0.561} (LIME+1)^{-0.198} (IA+1)^{0.073} (FOR+1)^{-0.067}$ | 31.8 | 34 |
| $Q_{200} = 3,153.5 DA^{0.550} (LIME+1)^{-0.222} (FOR+1)^{-0.090}$ | 35.7 | 32 |
| $Q_{500} = 3,905.3 DA^{0.533} (LIME+1)^{-0.233} (FOR+1)^{-0.045}$ | 42.0 | 30 |

Fixed Region Regression Equations for the Appalachian Plateau Region

The regression equations for the Appalachian Plateau Region are based on 24 gaging stations in Maryland with drainage area (DA) ranging from 0.52 to 294.14 square miles and land slope (LSLOPE) ranging from 0.0663 to 0.2265 ft/ft. One station, 03076505, was an outlier and eliminated from the regression analysis. Channel slope has a relatively high correlation with drainage areas of -0.73, and was not statistically significant in the regression equations. The equations, standard error of estimate in percent, and equivalent years of record are as follows

| Appalachian Plateau Region Fixed Region Regression Equation | Standard error (percent) | Equivalent years of record |
|--|--------------------------------|----------------------------------|
| $Q_{1.25} = 71.0 \text{ DA}^{0.848} \text{ LSLOPE}^{0.342}$ | 30.9 | 1.2 |
| $Q_{1.50} = 86.3 \text{ DA}^{0.837} \text{ LSLOPE}^{0.312}$ | 23.3 | 3.7 |
| $Q_2 = 112.7 \text{ DA}^{0.829} \text{ LSLOPE}^{0.319}$ | 21.1 | 6.6 |
| $Q_5 = 199.1 \text{ DA}^{0.813} \text{ LSLOPE}^{0.339}$ | 21.1 | 11 |
| $Q_{10} = 272.2 \text{ DA}^{0.801} \text{ LSLOPE}^{0.338}$ | 24.5 | 12 |
| $Q_{25} = 416.9 \text{ DA}^{0.794} \text{ LSLOPE}^{0.380}$ | 27.9 | 14 |
| $Q_{50} = 570.5 \text{ DA}^{0.790} \text{ LSLOPE}^{0.422}$ | 32.5 | 14 |
| $Q_{100} = 722.0 \text{ DA}^{0.783} \text{ LSLOPE}^{0.429}$ | 37.1 | 13 |
| $Q_{200} = 914.5 \text{ DA}^{0.777} \text{ LSLOPE}^{0.445}$ | 42.6 | 12 |
| $Q_{500} = 1,174.3 \text{ DA}^{0.768} \text{ LSLOPE}^{0.437}$ | 49.8 | 11 |

Regional Regression Equations for Maryland

Wilbert O. Thomas, Jr. and Glenn E. Moglen

Maryland Hydrology Panel

Latest update July, 2015

Regional regression equations are updated in Maryland as the need and funding become available. Regional regression equations for the Eastern Coastal Plain and Western Coastal Plain Regions have not been updated since the publication of the Third Edition of the Hydrology Panel report in September 2010. Therefore, the regression equations for the two coastal plain regions that follow are the same as those published in the September 2010 edition of the Hydrology Panel report. Regression equations were updated for the combined Piedmont-Blue Ridge Region and the Appalachian Plateau Region in July 2015.

Regional Regression Equations for Maryland

Wilbert O. Thomas, Jr. and Glenn E. Moglen

Background

The last update of regional regression equations for Maryland streams by the U.S. Geological Survey was by Dillow (1996) using annual peak flow data through 1990. Dillow (1996) defined regression equations for five hydrologic regions (Appalachian Plateau, Blue Ridge, Piedmont and Western and Eastern Coastal Plain) as shown in Figure A3.1. Moglen and others (2006) evaluated alternative statistical methods for estimating peak flow frequency in Maryland by comparing Fixed Region equations (similar to Dillow (1996)), the Region of Influence Method and the method of L-moments. The recommendation by Moglen and others (2006) was to use the Fixed Region regression for estimating flood discharges for bridge and culvert design in Maryland because these equations resulted in the lowest standard errors of estimate. Subsequent updates to regional regression equations have used the Fixed Region approach whereby regression equations are developed for separate hydrologic regions.

Since 2006, the Maryland State Highway Administration has been updating regression equations for Maryland as new data become available. In 2007, the Fixed Region regression equations were updated for the Eastern Coastal Plain Region as SSURGO soils data became available. In 2009, the Fixed Region regression equations were updated for the Western Coastal Plain Region as SSURGO soils data became available for that region. In 2010, the Maryland Hydrology Panel defined a new carbonate/limestone rock map for Maryland that included areas in the Blue Ridge and Piedmont Regions. This prompted the update of Fixed Region regression equations for rural watersheds for a combined Blue Ridge-Piedmont Region. Also in 2010, a slightly revised version of the SSURGO soils data became available for the coastal plain regions and those equations were updated again. The revised regression equations from the 2010 analysis were published in the September 2010 version of the Hydrology Panel report and were incorporated into GISHydro2000.

In 2015, the regional regression equations were updated for the combined Piedmont-Blue Ridge Region and the Appalachian Plateau Region (Thomas and Moglen, 2015). The regression equations for the combined Piedmont-Blue Ridge Region were based on both rural and urban watersheds.

This report describes updated regression equations for:

- Eastern Coastal Plain Region: same equations as published in the September 2010 version of the Hydrology Panel report,
- Western Coastal Plain Region: same equations as published in the September 2010 version of the Hydrology Panel report,

- Combined Blue Ridge-Piedmont Region: updated regression equations published in Thomas and Moglen (2015), and
- Appalachian Plateau Region: updated regression equations published in Thomas and Moglen (2015).

The hydrologic regions of Maryland as defined by Dillow (1996). These hydrologic regions are still be used with the exception the Piedmont and Blue Ridge Regions have been combined. The hydrologic characteristics are very similar for the two regions and watersheds with karst topography lie in both of these regions.

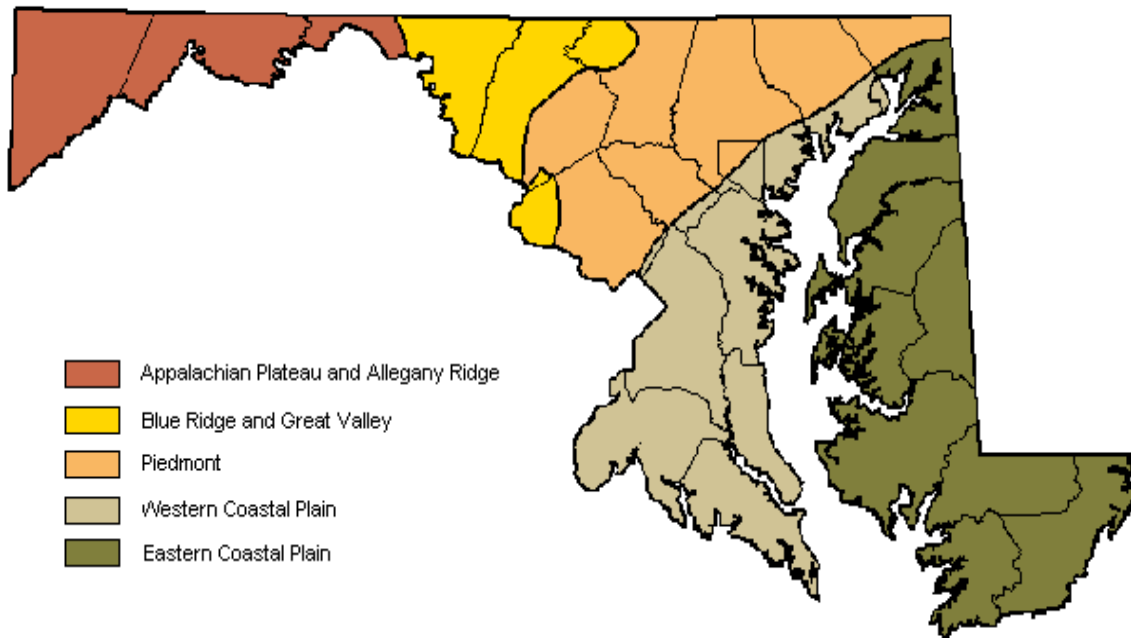


Figure A3-1: Hydrologic regions for Maryland as defined by Dillow (1996)

Regional Skew Analyses

The recommended approach in Bulletin 17B (Interagency Advisory Committee on Water Data (IACWD), 1982) is to estimate flood discharges based on a weighted skew that is computed by weighting station and generalized (regional) skew by their respective mean square error. Moglen and others (2006) evaluated if the generalized skew map in Bulletin 17B was applicable for Maryland streams. Station skews were computed at each gaging station using data through the 1999 water year by censoring low outliers and adjusting for high outliers and historical floods as described in Bulletin 17B. The station skew values were plotted on a map and compared to the skew map in Bulletin 17B. The new values were considered significantly different from the Bulletin 17B skew map and were used to define average regional skew.

The average regional skews for the two coastal plain regions were defined in the 2010 update of the Hydrology Panel report. The average skew for the Eastern Coastal Plain Region was 0.45 with a standard error of 0.41 and the average skew for the Western Coastal Plain Region was 0.55 with a standard error of 0.45. Another regional skew analysis was performed by Thomas and Moglen (2015) for the Piedmont-Blue Ridge Region and the Appalachian Plateau Region. The average regional skew for the two regions was 0.43 with a standard error of 0.42. The details of this analysis are described later.

Measures of Accuracy of the Regional Regression Equations

The accuracy of regression equations can be described by several measures. For this report, two measures of accuracy are provided: the standard error of estimate in percent and the equivalent years of record.

The standard error of estimate is a measure of how well the gaging station estimates of flood discharges agree with the computed regression equation. This value is estimated as the standard deviation of the residuals about the computed equation where the residuals are the difference between gaging station and regression estimates.

The equivalent years of record is defined as the number of years of actual streamflow record required at a site to achieve an accuracy equivalent to the standard error of estimate of the regional regression equation. The equivalent years of record (Nr) is computed as follows (Hardison, 1971):

$$N_r = (S/SE)^2 R^2$$

where S is an estimate of the standard deviation of the logarithms of the annual peak discharges at the ungaged site, SE is the standard error of estimate of the Fixed Region regression estimates in logarithmic units, and R^2 is a function of recurrence interval and skewness and is computed as (Stedinger and others, 1993):

$$R^2 = 1 + G \cdot K_x + 0.5 \cdot (1 + 0.75 \cdot G^2) \cdot K_x^2$$

where G is an estimate of the average skewness for a given hydrologic region, and K_x is the Pearson Type III frequency factor for recurrence interval x and skewness G. Average skewness values G were defined for each hydrologic region as follows: 0.39 for the Appalachian Region, 0.48 for the Piedmont-Blue Ridge Region, 0.513 for the Western Coastal Plain Region, and 0.484 for the Eastern Coastal Plain Region.

In order to estimate the equivalent years of record at an ungaged site, the standard deviation of the logarithms of the annual peak discharges (S in the equation above) must be estimated. Average values of S were computed for each region and are as follows: 0.235 log units for the Appalachian Region, 0.309 log units for the Western Coastal Plain Region, and 0.295 log units for the Eastern Coastal Plain Region. The standard deviation (S in log units) varied as a function of watershed characteristics for the Piedmont-Blue Ridge Region and is estimated with the following equation:

$S = 0.24862 - 0.05379 \cdot \log(\text{DA}) + 0.09843 \cdot \log(\text{FOR} + 1) - 0.0297 \cdot \log(\text{IA} + 1)$ where DA is drainage area in square miles, FOR is forest cover in percent and IA is impervious area in percent.

Regression Equations for the Eastern Coastal Plain Region

Previous Investigations in the Eastern Coastal Plain Region

The Fixed Region regression equations that are currently being used for bridge and culvert design in Maryland are documented in Moglen and others (2006) and are available in GISHydro2000 (Moglen, 2007). These equations for the Eastern Coastal Plain Region are based on STATSGO soils data and annual peak data through 1999. These Fixed Region regression equations are also summarized in “Application of Hydrologic Methods in Maryland” prepared by the Maryland Hydrology Panel (2006).

In September 2007, the Fixed Region regression equations for the Eastern Coastal Plain Region were updated by including additional years of flow record through 2006 and incorporating recently released SSURGO soils data. A slightly revised version of the SSURGO soils data became available in early 2010 and the regression equations were updated to utilize this new information. The flood frequency analyses were not updated, only the new SSURGO data were incorporated in the analysis.

Data Compilation for the Eastern Coastal Plain Region

The annual peak flow data for gaging stations in the eastern coastal plain areas of Maryland and Delaware were reviewed for suitability for a regional analysis. Those stations with at least 10 years of annual peak flow data without regulation from flood-control structures were considered. Using these criteria, 31 stations were selected with 16 stations in Maryland and 15 stations in Delaware. These stations are listed in Table A3-2 at the end of the Eastern Coastal Plain section. Of the 31 stations, 24 were used previously in developing the Fixed Region regression equations (Moglen and others, 2006) that are also included in the Maryland Hydrology Panel report. Of the 24 stations used in the earlier regional analysis, 13 stations have additional peak flow data beyond 1999. Annual peak data are now available through the 2006 water year and the record lengths for the 31 stations ranged from 10 to 64 years with 17 stations having record lengths in excess of 30 years.

The following watershed characteristics were determined for the 31 gaging stations used in the current analysis using GISHydro2000 (Moglen, 2007).

1. Gage ID
2. Area (as calculated using GISHydro) in square miles
3. A soils: SSURGO in percent
4. B soils: SSURGO in percent

5. C soils: SSURGO in percent
6. D soils: SSURGO in percent
7. Land Slope: consistent with SCS definition in ft/ft
8. Channel Slope (10/85) in feet/mile
9. Mean Basin Slope (consistent with Ries and Dillow, 2006) in percent
10. Basin Relief (as defined by Dillow, 1996) in feet
11. Forest Cover: from Maryland Department of Planning/Delaware land use 2002
12. USGS Area: in square miles, for comparison purposes
13. Percent error: $(\text{GIS Area} - \text{USGS Area})/\text{USGS Area} * 100$ (in percent)

Flood Frequency Analysis in the Eastern Coastal Plain Region

Annual peak data for the 31 stations were retrieved from the USGS web sites (<http://water.usgs.gov/md/nwis/sw> and <http://water.usgs.gov/de/nwis/sw>) and Bulletin 17B (Interagency Advisory Committee on Water Data, 1982) frequency analyses were performed using station skew. Flood frequency analyses were first done with station skew to determine if a change is needed in the generalized (regional) skew for the Eastern Coastal Plains Region. In Moglen and others (2006), a generalized skew value of 0.45 with a standard error of 0.41 was adopted for the Eastern Coastal Plain Region. An analysis of station skew based on the updated Bulletin 17B analyses for the 16 long-term stations indicated that the mean skew is 0.43 with a standard error of 0.385. The median skew was 0.44. Because the new analysis was very consistent with the previous analysis, a generalized skew of 0.45 with a standard error of 0.41 as determined in the previous analysis was used in developing the final frequency curves.

The final flood frequency estimates were determined by weighting the station skew and generalized skew of 0.45 using the USGS program PeakFQ (Flynn and others, 2006) that implements Bulletin 17B. Flood discharges were estimated for the 1.25-, 1.50-, 2-, 5-, 10-, 25-, 50-, 100-, 200- and 500-year events.

There were 8 small-stream stations where rainfall-runoff modeling results were available from an earlier study by Carpenter (1980). In the Carpenter study, a rainfall-runoff model was calibrated based on short-term rainfall and runoff data and then long-term annual peaks (approximately 65 years) were simulated using long-term precipitation data at Baltimore, Maryland or Atlantic City, New Jersey. The frequency estimates based on the simulated data were then weighted with those based on the observed data (9 or 10 years in duration). Carpenter (1980) used and published the weighted estimates.

For this study, each of the 8 stations was evaluated and a determination was made as to whether to use the Carpenter (1980) frequency estimates or those based just on the observed data. The analysis of the short-term observed record at some stations was complicated by the major flood event of August 1967 that occurred during the short systematic record. The following conclusions were made based on engineering judgment:

- Puncheon Branch at Dover, DE (station 01483720) – use the observed record
- Murderkill River Trib near Felton, DE (station 01484002) – use the observed record and consider the August 1967 flood the highest in 40 years
- Pratt Branch near Felton, DE (station 01484050) – use the observed record and consider the August 1967 flood the highest in 40 years
- Andrews Branch near Delmar, MD (station 01486100) – use the weighted estimates as published by Carpenter (1980)
- Toms Dam Branch near Greenwood, DE (station 01486980) – use the observed record
- Meadow Branch near Delmar, DE (station 01487900) - use the weighted estimates as published by Carpenter (1980)
- Meredith Branch near Sandtown, DE (01490600) - use the weighted estimates as published by Carpenter (1980)
- Sangston Prong near Whiteleysburg, DE (station 01491010) – use the observed record and consider the August 1967 flood as the highest in 30 years

There were a few stations where the annual peak flows demonstrated an upward trend when plotted versus time. An example is given in Figure A3.2 for Stockley Branch at Stockley, Delaware (01484500). Because there were no significant land-use changes for these watersheds, the increase in annual peak flows was assumed to be due to climatic variability and the full period of record was used in the frequency analysis with no trend adjustments. Only a few stations in Eastern Coastal Plain Region exhibited this type of trend, so it is unlikely there is any regional change in climate.

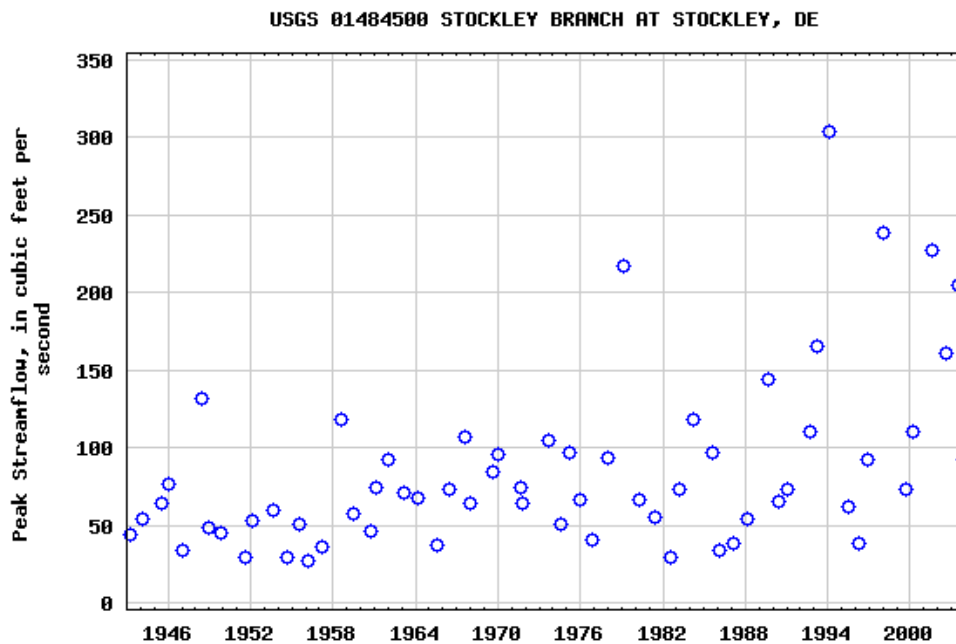


Figure A3-2: Annual peak data for Stockley Branch at Stockley, Delaware (01484500)

Regional Regression Analyses for the Eastern Coastal Plain Region

In the previous regional regression analysis documented by Moglen and others (2006), the significant explanatory variables for the Eastern Coastal Plain Region regression equations were drainage area in square miles, basin relief in feet and percentage of the watershed with A soils based on the STATSGO data. For the current analysis using the SSURGO soils data and the updated flood frequency estimates, the most significant explanatory variables are now drainage area in square miles, percentage of A Soils and land slope in ft/ft or percent or basin relief in feet. Land slope as defined by the SCS and mean basin slope as defined in Ries and Dillow (2006) are essentially the same and either one could be used in the regional regression equations. Both variables represent the mean of the slope grids in the watershed along the steepest direction of flow. In addition, basin relief also defines the steepness of the watershed and could be used in the regression equations in lieu of land slope as discussed later.

The regional regression analyses first included all 31 stations, 16 stations in Maryland and 15 in Delaware. The watershed characteristics and flood discharges are listed in Appendices 1 and 2, respectively. Three stations were outliers and were not used in the regression analysis:

- Sowbridge Branch near Milton, Delaware, station 01484300 (drainage area = 7.17 square miles, 22 years of record),
- Toms Dam Branch near Greenwood, Delaware, station 01486980 (drainage area = 6.44 square miles, 10 years of record),
- Beaverdam Branch at Matthews, Maryland, station 01492000 (drainage area = 5.49 square miles, 32 years of record).

Annual peak flows are very low for Sowbridge Branch and Toms Dam Branch with the highest annual peak flow of 134 cfs at either station for drainage areas of about 7 square miles. Sowbridge Branch has 50.7 percent of the watershed in A soils but even with A soils as an explanatory variable, the station is still an outlier. A major flood has not occurred at either station so it appears to be a time-sampling issue (record for Toms Branch is only 10 years). The flood frequency estimates at Beaverdam Branch are influenced by the large flood that occurred in September 1960 which is more than two times the next largest annual peak. This coupled with the fact that 33.5 percent of the watershed is in A soils make this station an outlier when A soils is an explanatory variable. The flood discharges are high for this station because of the large 1960 flood and the percent of A soils may not be properly defined. The final regression equations were based on 28 stations, excluding these three stations.

Some of the explanatory variables are correlated and this explains why certain variables are either statistically significant or not. If two explanatory variables are highly correlated, the variable that is most highly correlated with the flood discharges takes

precedent. The correlations among several explanatory variables for the 28 stations used in the regional regression analysis are given in Table A3.1.

Table A3-1: Correlation structure for the logarithms of the explanatory variables for 28 stations used in the regression analysis

| Variables | DA | S _A | S _D | LSLOPE | CSL | MBS | BR | FOR |
|-------------------------------------|------|----------------|----------------|--------|-------|--------|-------|-------|
| Drainage Area (DA), mi ² | 1.00 | 0.039 | 0.36 | -0.15 | -0.66 | -0.16 | 0.41 | 0.16 |
| A Soils (S _A), percent | | 1.00 | -0.33 | -0.008 | 0.08 | -0.021 | 0.12 | 0.022 |
| D Soils (S _D), percent | | | 1.00 | -0.67 | -0.68 | -0.67 | -0.43 | 0.36 |
| Land Slope (LSLOPE), ft/ft | | | | 1.00 | 0.72 | 0.999 | 0.72 | -0.22 |
| Channel Slope (CSL), ft/mi | | | | | 1.00 | 0.73 | 0.32 | -0.27 |
| Mean Basin Slope (MBS), percent | | | | | | 1.00 | 0.72 | -0.20 |
| Basin Relief (BR), ft | | | | | | | 1.00 | 0.006 |
| Forest (FOR), percent | | | | | | | | 1.00 |

The strong correlations (> 0.65) given in Table A3-1 are as follows:

- Drainage area and channel slope are inversely correlated,
- Percent D soils is inversely correlated with land slope, channel slope, mean basin slope and basin relief,
- Land slope is directly correlated with channel slope and basin relief and is essentially the same variable as mean basin slope (correlation = 0.999),
- Channel slope is directly correlated with mean basin slope,
- Mean basin slope is directly correlated with basin relief.

As shown in Table A3-1, percent A soils is not highly correlated with any other explanatory variable and is therefore explaining variability in the flood discharges not explained by other variables. Even though drainage area and channel slope are highly correlated, channel slope is still a significant variable in the regression analyses when used in conjunction with drainage area. However, the exponent on drainage area, the most significant variable, is close to 1.0 for certain frequencies and this is not rational so channel slope was not used in the final regression equations.

Percent D soils has a high inverse correlation with land slope, channel slope and mean basin slope. Therefore, percent D soils was not statistically significant in the regression analysis because all the slope parameters were statistically significant and reduced the significance of percent D soils.

As noted above, land slope and mean basin slope, although computed slightly different, are essentially the same variable. Both were highly significant in the regression analysis. Land slope was chosen because of its use in other hydrologic regions in Maryland. Land slope and basin relief are also highly correlated (0.72) and so both variables are essentially accounting for the same variation in the flood discharges. Basin relief was used in the regression equations for the Eastern Coastal Plain for the previous study as documented in Moglen and others (2006) and the Hydrology Panel report (2006) Appendix 3. Therefore, two sets of regression equations are provided herein based on drainage area, A soils and land slope (slightly more accurate) and based on drainage area, A soils and basin relief (for comparison to the existing Fixed Region equations).

Regression equations based on land slope

The following equations are based on 28 stations in Maryland and Delaware with drainage area (DA) ranging from 0.91 to 113.7 square miles, percent A soils (S_A) ranging from 0.0 to 78.8 percent, and land slope (LSLOPE) ranging from 0.00250 to 0.0160 ft/ft. All variables are statistically significant at the 5-percent level of significance except LSLOPE for flood discharges less than the 5-year event but LSLOPE is included in the regression equations for consistency. The equations, standard error of estimate (SE) in percent and equivalent years (Eq. years) of record are as follows:

| Equation | SE (%) | Eq. years | |
|--|--------|-----------|-----|
| $Q_{1.25} = 41.53 DA^{0.815} (SA+1)^{-0.139} LSLOPE^{0.115}$ | 32.4 | 4.6 | (1) |
| $Q_{1.50} = 78.75 DA^{0.824} (SA+1)^{-0.144} LSLOPE^{0.194}$ | 32.3 | 4.1 | (2) |
| $Q_2 = 134.0 DA^{0.836} (SA+1)^{-0.158} LSLOPE^{0.249}$ | 32.8 | 4.4 | (3) |
| $Q_5 = 477.5 DA^{0.847} (SA+1)^{-0.184} LSLOPE^{0.385}$ | 35.1 | 7.0 | (4) |
| $Q_{10} = 924.3 DA^{0.844} (SA+1)^{-0.196} LSLOPE^{0.445}$ | 36.7 | 9.7 | (5) |
| $Q_{25} = 1860.4 DA^{0.834} (SA+1)^{-0.212} LSLOPE^{0.499}$ | 39.3 | 13 | (6) |
| $Q_{50} = 2941.5 DA^{0.824} (SA+1)^{-0.222} LSLOPE^{0.531}$ | 41.6 | 15 | (7) |

$$Q_{100} = 4432.9 DA^{0.812} (SA+1)^{-0.230} LSLOPE^{0.557} \quad 44.2 \quad 17 \quad (8)$$

$$Q_{200} = 6586.3 DA^{0.800} (SA+1)^{-0.237} LSLOPE^{0.582} \quad 47.2 \quad 18 \quad (9)$$

$$Q_{500} = 10,587 DA^{0.783} (SA+1)^{-0.247} LSLOPE^{0.610} \quad 51.6 \quad 19 \quad (10)$$

The 100-year estimates from Equation 8 above are compared to the corresponding gaging station estimates in Figure A3.3. The equal yield line is drawn as a frame of reference. The 100-year estimates seem to be evenly distributed about the equal yield line.

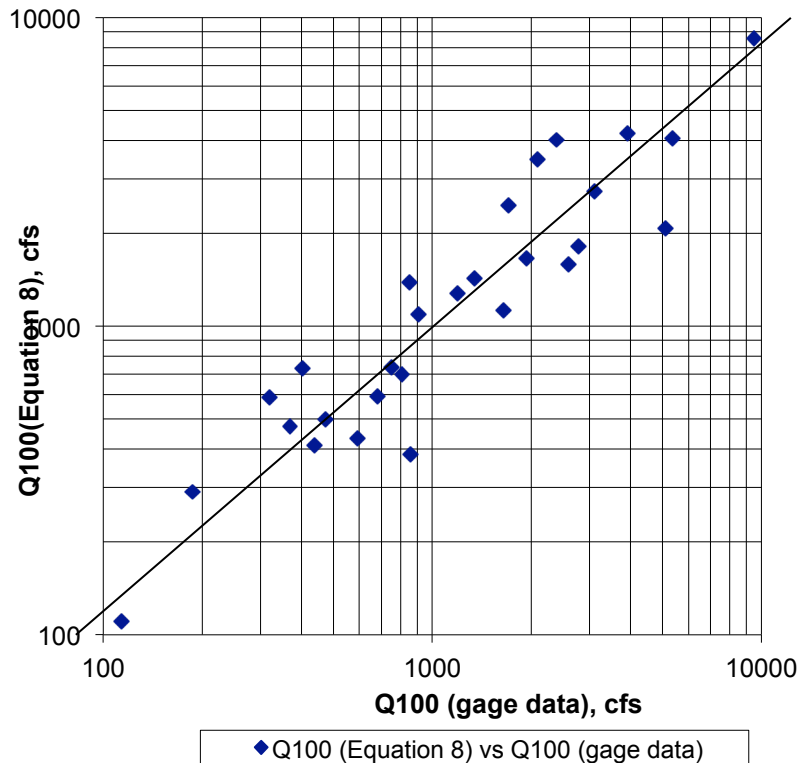


Figure A3-3: Comparison of the 100-year estimates based on Equation 8 in this report and gaging station data

Estimates from the existing 100-year equation in Moglen and others (2006) and Appendix 3 of the Hydrology Panel report were compared to estimates from Equation 8 given earlier in this report. The comparisons are shown in Figure A3-4. The existing 100-year equation is based on drainage area, basin relief and percentage of A soils based on STATSGO data. As shown in Figure A3-4, the existing equation and Equation 8 give about the same 100-year estimate on average. The best-fit line has a slope close to 1.0. The variation about the best-fit line is primarily due to differences in SSURGO and STATSGO data for some of the gaging stations.

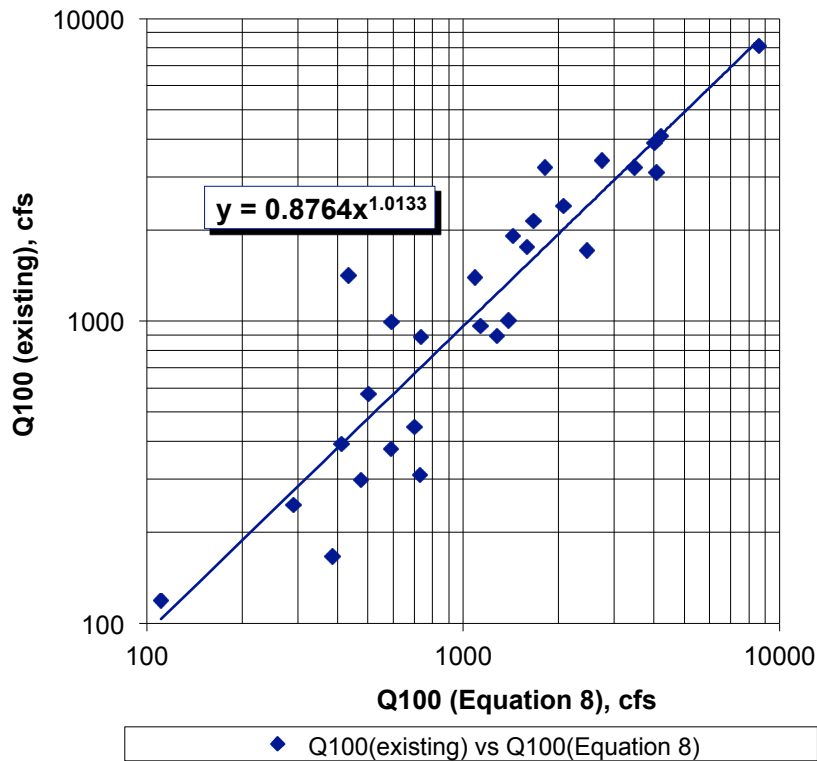


Figure A3-4. Comparison of 100-year estimates for the existing 100-year equation in Moglen and others (2006) and Equation 8 in this report

Comparison to USGS Scientific Investigations Report 2006-5146

The USGS published Scientific Investigations Report (SIR) 2006-5146 titled “Magnitude and Frequency of Floods on Nontidal Streams in Delaware” in 2006 that provides regression equations for Delaware streams. The Coastal Plain Region equations are based on drainage area, percentage A soils (STATSGO soils), and mean basin slope. A comparison was made between the 100-year flood discharge estimated by the USGS Coastal Plain Region equation and estimates from Equation 8 in this report.

Figure A3-5 compares the USGS 100-year estimates to corresponding estimates from Equation 8 given earlier in this report. Equation 8 gives higher 100-year estimates across the range of flows shown in Figure A3-5. The difference ranges from a few percent at the low discharges to about 30 percent for the larger discharges.

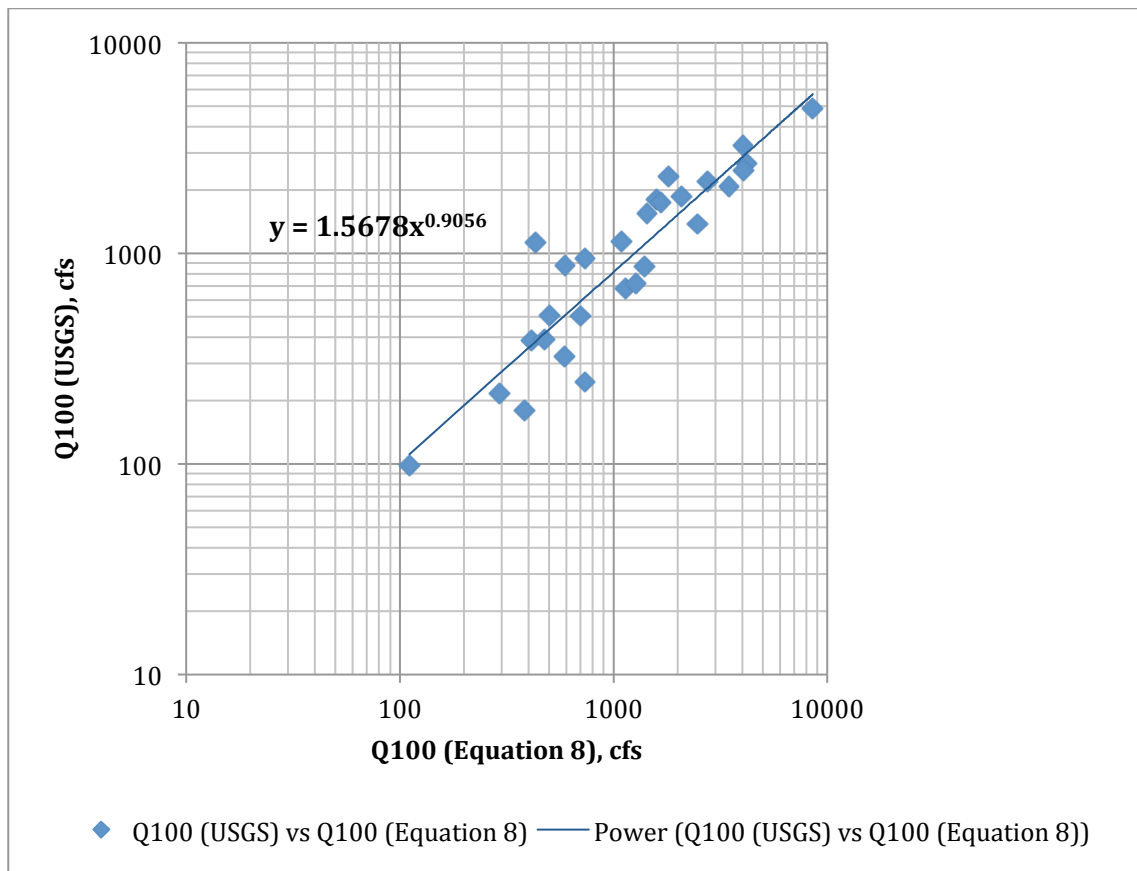


Figure A3-5: Comparison of 100-year discharges estimated from the USGS equation in SIR 2006-5146 and Equation 8 in this report

Summary Comments for the Eastern Coastal Plain Region

The regression equations for the Eastern Coastal Plains were revised using updated annual peak data for 28 gaging stations in Maryland and Delaware and SSURGO soils data. However, of the 28 stations used in the regression analysis, only 13 stations had updated annual peak data since 1999. The three variables found to be most significant were drainage area, percentage A soils and land slope. Comparisons of 100-year estimates from Equation 8 to estimates from the existing 100-year equation (Moglen and others, 2006; Hydrology Panel, 2006) indicate that, on average, the two equations give similar estimates. There is significant variation for individual stations due to the variation in SSURGO and STATSGO soils data. A comparison with USGS SIR 2006-5146 indicates that Equation 8 provides 100-year estimates that range from a few percent to about 30 percent more than the USGS estimates. This is partially related to the different values of regional skew that were used by USGS (0.204) and in this study (0.45).

Table A3.2. Listing of gaging stations in the Eastern Coastal Plain Region.

| | | Gage Name | Start year | End Year | Yrs. Record |
|------|----------|---|-----------------------|---------------------|------------------------|
| USGS | 1483200 | BLACKBIRD CREEK AT BLACKBIRD, DE | 1952 | 2006 | 54 |
| USGS | 1483500 | LEIPSIC RIVER NEAR CHESWOLD, DE | 1943 | 1975 | 33 |
| USGS | 1483720 | PUNCHEON BRANCH AT DOVER, DE | 1966 | 1975 | 10 |
| USGS | 1484000 | MURDERKILL RIVER NEAR FELTON, DE | 1932 | 1999 | 31 |
| USGS | 1484002 | MURDERKILL RIVER TR NEAR FELTON, DE | 1966 | 1975 | 10 |
| USGS | 1484050 | PRATT BRANCH NEAR FELTON, DE | 1905 | 1975 | 10 |
| USGS | 1484100 | BEAVERDAM BRANCH AT HOUSTON, DE | 1958 | 2006 | 49 |
| USGS | 1488500 | MARSHYHOPE CREEK NEAR ADAMSVILLE, DE | 1935 | 2006 | 60 |
| USGS | 1490600 | MEREDITH BRANCH NEAR SANDTOWN, DE | 1966 | 1975 | 10 |
| USGS | 1491010 | SANGSTON PRONG NEAR WHITELEYSBURG, DE | 1966 | 1975 | 10 |
| USGS | 1484300* | SOWBRIDGE BRANCH NEAR MILTON, DE | 1957 | 1978 | 22 |
| USGS | 1484500 | STOCKLEY BRANCH AT STOCKLEY, DE | 1943 | 2003 | 62 |
| USGS | 1486980* | TOMS DAM BRANCH NEAR GREENWOOD, DE | 1966 | 1975 | 10 |
| USGS | 1487000 | NANTICOKE RIVER NEAR BRIDGEVILLE, DE | 1935 | 2006 | 64 |
| USGS | 1487900 | MEADOW BRANCH NEAR DELMAR, DE | 1967 | 1975 | 9 |
| USGS | 1489000 | FAULKNER BRANCH AT FEDERALSBURG, MD | 1950 | 1991 | 42 |
| USGS | 1490800 | OLDTOWN BRANCH AT GOLDSBORO, MD | 1967 | 1976 | 10 |
| USGS | 1491000 | CHOPTANK RIVER NEAR GREENSBORO, MD | 1948 | 2006 | 59 |
| USGS | 1491050 | SPRING BRANCH NEAR GREENSBORO, MD | 1967 | 1976 | 10 |
| USGS | 1490000 | CHICAMACOMICO RIVER NEAR SALEM, MD | 1951 | 2006 | 34 |
| USGS | 1492050 | GRAVEL RUN AT BEULAH, MD | 1966 | 1975 | 11 |
| USGS | 1493500 | MORGAN CREEK NEAR KENNEDYVILLE, MD | 1951 | 2006 | 55 |
| USGS | 1492500 | SALLIE HARRIS CREEK NEAR CARMICHAEL, MD | 1952 | 2006 | 36 |
| USGS | 1493000 | UNICORN BRANCH NEAR MILLINGTON, MD | 1948 | 2005 | 56 |
| USGS | 1494000 | SOUTHEAST CREEK AT CHURCH HILL, MD | 1952 | 1965 | 14 |
| USGS | 1486000 | MANOKIN BRANCH NEAR PRINCESS ANNE, MD | 1951 | 2006 | 53 |
| USGS | 1492000* | BEAVERDAM BRANCH AT MATTHEWS, MD | 1950 | 1981 | 32 |
| USGS | 1492550 | MILL CREEK NEAR SKIPTON, MD | 1966 | 1976 | 11 |
| USGS | 1486100 | ANDREWS BRANCH NEAR DELMAR, MD | 1967 | 1976 | 10 |
| USGS | 1485000 | POCOMOKE RIVER NEAR WILLARDS, MD | 1950 | 2006 | 57 |
| USGS | 1485500 | NASSAWANGO CREEK NEAR SNOW HILL, MD | 1950 | 2006 | 57 |

* Not used in the regression analysis

Regression Equations for the Western Coastal Plain

Previous Investigations in the Western Coastal Plain Region

The Fixed Region regression equations that are currently (2010) being used for bridge design in Maryland are documented in Moglen and others (2006) and are available in GISHydro2000 (Moglen, 2007). These equations for the Western Coastal Plain Region are based on STATSGO soils data and frequency analyses based on annual peak data through 1999. These Fixed Region regression equations for the Western Coastal Plain Region are also summarized in “Application of Hydrologic Methods in Maryland”, a report prepared by the Maryland Hydrology Panel (2006).

In June 2009, the Fixed Region regression equations for the Western Coastal Plain Region were updated by including additional years of flow record through 2008 and incorporating recently released SSURGO soils data. A slightly revised version of the SSURGO soils data became available in early 2010 and the regression equations were updated to utilize this new information. The flood frequency analyses were not updated and are still based on annual peak flow data through 2008.

Data Compilation for the Western Coastal Plain Region

The annual peak flow data for gaging stations in the Western Coastal Plain Region of Maryland were reviewed for suitability for regional analysis. Those stations with at least 10 years of annual peak flow data without regulation from flood-control structures were considered. Using these criteria, 26 stations were selected with record lengths ranging from 10 to 71 years. No gaging stations located in Virginia were used because there are no land use data comparable to Maryland stations. The stations are listed in Table A3-3 at the end of the Western Coastal Plain Region. Of the 26 stations, 22 were used previously in developing the Fixed Region regression equations (Moglen and others, 2006; Maryland Hydrology Panel, 2006). Three stations that were considered outliers in the 2006 analysis were considered again for this analysis and one new station was added (South Fork Jabez Branch at Millersville, 01589795). This latter station did not have sufficient record to be included in the 2006 analysis. Of the 26 stations considered for this regional analysis, 12 stations have additional peak flow data beyond 1999 and through the 2008 water year.

The following watershed characteristics were determined for the 26 gaging stations used in the current analysis using GISHydro2000 (Moglen, 2007).

14. Gage ID
15. Drainage area (as calculated using GISHydro) in square miles
16. USGS published drainage area in square miles
17. Impervious area: from Maryland Department of Planning land use 2002
18. A soils: SSURGO in percent

19. B soils: SSURGO in percent
20. C soils: SSURGO in percent
21. D soils: SSURGO in percent
22. Land Slope: consistent with SCS definition in ft/ft
23. Channel Slope (10/85) in feet/mile
24. Percent urban area: from Maryland Department of Planning land use 2002
25. Basin Relief (as defined by Dillow, 1996) in feet
26. Forest Cover: from Maryland Department of Planning land use 2002
27. Curve number based on SSURGO soils
28. Longest flow path in miles

Flood Frequency Analysis in the Western Coastal Plain Region

Annual peak data for the 12 stations with new annual peak data were retrieved from the USGS web site (<http://water.usgs.gov/md/nwis/sw>) and Bulletin 17B (Interagency Advisory Committee on Water Data, 1982) frequency analyses were performed using station skew. Flood frequency analyses were first done with station skew to determine if a change is needed in the generalized (regional) skew for the Western Coastal Plain Region. In Moglen and others (2006), a generalized skew value of 0.55 with a standard error of 0.44 was adopted for the Western Coastal Plain Region as well as for the Piedmont, Blue Ridge and Appalachian Plateau Regions. An analysis of station skew based on the updated Bulletin 17B analyses for 21 long-term stations (stations with high and low outliers were not used) indicated that the mean skew is 0.52 with a standard error of 0.45. The median skew was 0.54. Because the new analysis was very consistent with the 2006 analysis that included the Piedmont, Blue Ridge and Appalachian Plateau Regions, the generalized skew of 0.55 and standard error of 0.44 as determined in the previous analysis (Moglen and others, 2006; Maryland Hydrology Panel, 2006) was used in developing the final frequency curves.

The final flood frequency estimates were determined by weighting the station skew and generalized skew of 0.55 using the U.S. Geological Survey (USGS) program PeakFQ (Flynn and others, 2006) that implements Bulletin 17B. Flood discharges were estimated for the 1.25-, 1.50-, 2-, 5-, 10-, 25-, 50-, 100-, 200- and 500-year events.

There was one small-stream station, Clark Run near Bel Alton (01660930), where rainfall-runoff modeling results were available from an earlier study by Carpenter (1980). In the Carpenter study, a rainfall-runoff model was calibrated based on short-term rainfall and runoff data and then long-term annual peaks (approximately 65 years) were simulated using long-term precipitation data at Baltimore, Maryland or Atlantic City, New Jersey. The frequency estimates based on the simulated data were then weighted with those based on the observed data (9 to 11 years in duration). Carpenter (1980) published the weighted estimates.

For this study, the flood discharges as determined by Carpenter (1980) were used for Clark Run near Bel Alton (01660930). These estimates were considered more reasonable than the estimates based on 11 years of data (1966-76).

Several of the gaged watersheds have undergone urbanization during the period of data of data collection. The annual time series were reviewed to determine if there were any visual trends in the data. There were only two stations that had a noticeable trend and they were: NE Branch Anacostia River at Riverdale (01649500) and NW Branch Anacostia River near Hyattsville (01651000). The annual peak data for station 01649500 are shown in Figure A3-6 and in Figure A3-7 for station 01651000.

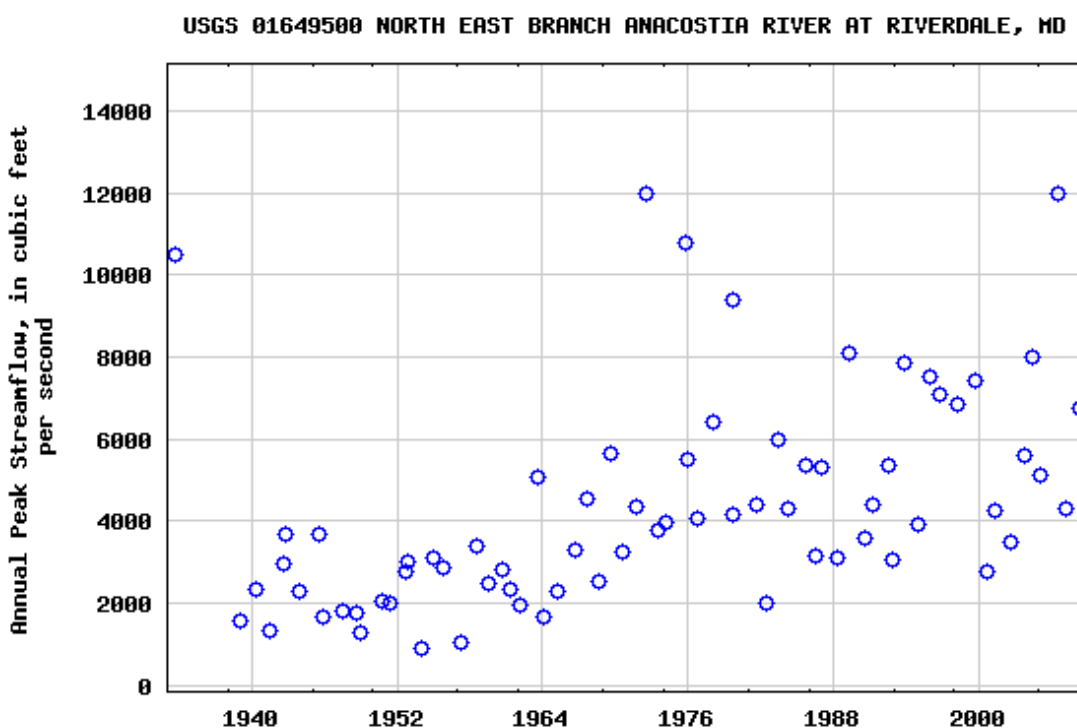


Figure A3-6: Annual peak data for NE Branch Anacostia River at Riverdale, Maryland (01649500)

As shown in Figures A3-6 and A3-7, there is an increase in annual peaks for both stations beginning in the mid 1960s. The frequency analysis for station 01649500 was performed on the period 1963 to 2008 and for station 01651000 the period chosen was 1966 to 2008. These periods were chosen in lieu of the full period of record to achieve a more homogeneous record. The frequency analyses for all other stations were based on the full period of record because there were no noticeable trends.

Figures A3-6 and A3-7 both illustrate three large floods that occurred in the 1970s. This was an active period for floods for this region of Maryland.

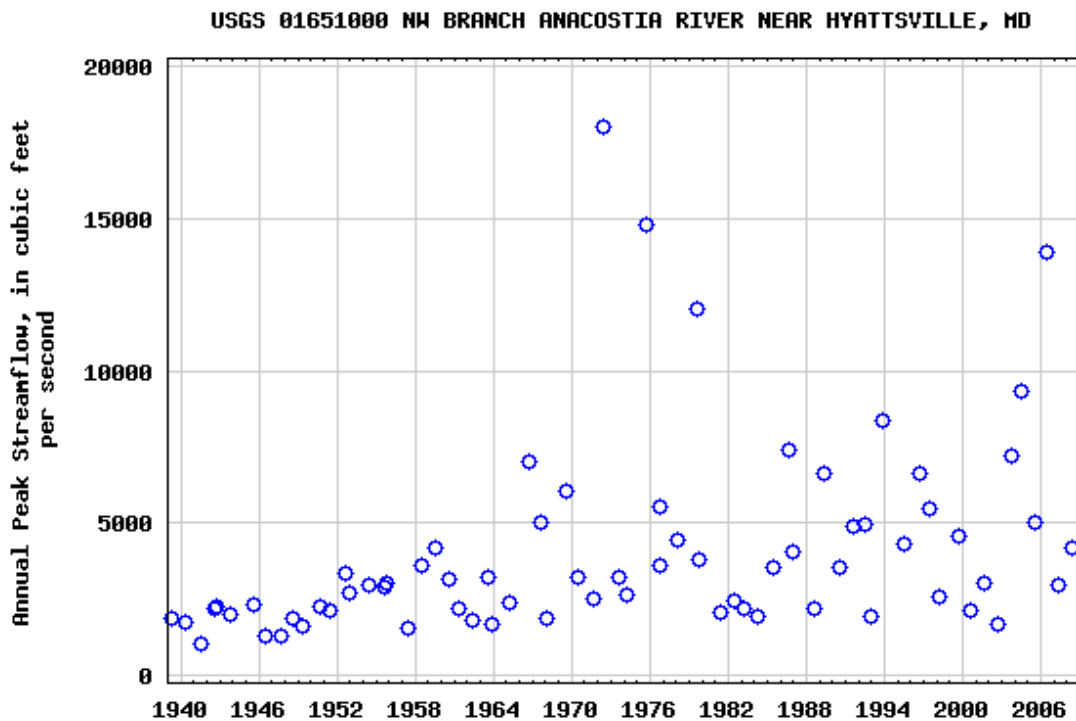


Figure A3-7: Annual peak data for NW Branch Anacostia River near Hyattsville, Maryland. (01651000)

The frequency curve for one station, St. Clement Creek near Clements, Maryland (01661050), was determined graphically by drawing a smooth curve through the Weibull plotting positions. The frequency curve at this station had an S shape and could not be accurately characterized by the 3-parameter log-Pearson Type III distribution. An examination of the USGS topographic map indicated a very wide floodplain upstream of the gaging station and the flood data may be affected by natural storage in the floodplain.

Regional Regression Analyses for the Western Coastal Plain Region

In the previous regional regression analysis documented by Moglen and others (2006), the significant explanatory variables for the Western Coastal Plain Region regression equations were drainage area in square miles, impervious area for 1985 in percent and percentage of the watershed with D soils based on the STATSGO data. For the current analysis, neither the percentage D soils nor the percentage A soils, based on SSURGO data, were statistically significant. Therefore, the sum of the percentage of A and B soils and the sum of the percentage of C and D soils were evaluated as predictor variables.

Both combinations of variables (A+B and C+D) were statistically significant but, of course, not in the same equation since the two sums are highly correlated (-0.93). The sum of the percentage of C and D soils was chosen after many trial analyses because this

sum provided a slightly lower standard error than the sum of the percentage of A and B soils and the sum of the percentage of C and D soils was more uniformly distributed across the 24 watersheds. The downside of using the sum of the percentage of C and D soils is that this variable is more correlated with impervious area, the third explanatory variable, than the sum of the percentage A and B soils. The objective any regression analysis is to choose explanatory variables that are as uncorrelated as possible.

Impervious area for the 1985, 1990 and 1997 land use conditions were available from Moglen and others (2006). The impervious area based on USGS 1970's land use data was also available but those data were not always consistent with subsequent land use data. In this study, impervious area was determined for 2002 land use conditions. The impervious area for a given watershed that was most indicative of the period of record for the peak flow data was determined. For example, if the peak flow data ended in the 1980s or before, impervious area for 1985 was used. The impervious area for 1985, as used in the 2006 analysis, was still the most appropriate data for 16 of the 24 stations in the regression analysis.

For the regression analysis the impervious area for 1985 and the impervious area most applicable to the period of record were evaluated. The impervious area most applicable to the period of record actually provided a slightly lower standard error but the exponent on impervious area did not change much from the 1.25-year event to the 500-year event, which is not reasonable. The impervious area for 1985 was chosen as the third explanatory variable because the range in exponent was more reasonable.

The impervious area for 1985 was used in developing the regression equations because this variable yielded the most reasonable regression equations. When applying the regression equations to an unengaged site, the analyst should use the most current estimate of impervious area.

The watershed characteristics and flood discharges are listed in Appendices 1 and 2, respectively.

Results of the Regression Analysis for the Western Coastal Plain Region

The following equations are based on 24 stations in the Western Coastal Plain region of Maryland with drainage area (DA) ranging from 0.41 to 349.6 square miles, impervious area ranging from 0.0 to 36.8 percent, and the sum of the percentage of C and D soils ranging from 13 to 74.7 percent. Two stations were deleted from the analysis because they were outliers: Sawmill Creek at Glen Burnie (01589500) and Dorsey Run near Jessup (01594400). Both stations had small annual peaks for their respective drainage areas and there are other factors effectively runoff in addition to the variables in the regression equations.

The equations and standard errors are given below. The flood discharges for various recurrence intervals x (Q_x), drainage area (DA), impervious area (IA) and the sum of the percentage of C and D soils (S_{CD}) were converted to logarithms base 10 and a linear regression analysis was performed. The equations were then converted to a power form and are given below. Drainage area (DA) and sum of percentage C and D soils (S_{CD}) are significant at the 5-percent level (p-level) for all recurrence intervals. Impervious area (IA) is statistically significant at the 10-percent level up to the 100-year event (Q_{100}). For Q_{200} and Q_{500} , the p-level for IA is 0.1237 and 0.1763, respectively, but this variable was retained in the equations for consistency. The equations, standard error of estimate (SE) in percent, and equivalent years (Eq. years) of record are as follows:

| Equation | SE (%) | Eq. years | |
|---|--------|-----------|------|
| $Q_{1.25} = 5.18 DA^{0.694} (IA+1)^{0.382} (S_{CD}+1)^{0.414}$ | 39.0 | 3.6 | (11) |
| $Q_{1.50} = 6.73 DA^{0.682} (IA+1)^{0.374} (S_{CD} +1)^{0.429}$ | 36.4 | 3.6 | (12) |
| $Q_2 = 7.61 DA^{0.678} (IA+1)^{0.362} (S_{CD} +1)^{0.475}$ | 33.2 | 4.6 | (13) |
| $Q_5 = 10.5 DA^{0.665} (IA+1)^{0.290} (S_{CD} +1)^{0.612}$ | 38.2 | 6.7 | (14) |
| $Q_{10} = 13.1 DA^{0.653} (IA+1)^{0.270} (S_{CD} +1)^{0.669}$ | 42.7 | 8.2 | (15) |
| $Q_{25} = 17.5 DA^{0.634} (IA+1)^{0.264} (S_{CD} +1)^{0.719}$ | 48.1 | 10 | (16) |
| $Q_{50} = 21.2 DA^{0.621} (IA+1)^{0.263} (S_{CD} +1)^{0.751}$ | 54.0 | 11 | (17) |
| $Q_{100} = 25.6 DA^{0.608} (IA+1)^{0.262} (S_{CD} +1)^{0.781}$ | 61.2 | 11 | (18) |
| $Q_{200} = 30.5 DA^{0.596} (IA+1)^{0.261} (S_{CD} +1)^{0.812}$ | 69.6 | 10 | (19) |
| $Q_{500} = 37.9 DA^{0.579} (IA+1)^{0.261} (S_{CD} +1)^{0.849}$ | 82.5 | 10 | (20) |

As noted earlier, impervious area for 1985 land use conditions was used to develop the regression equations but the analyst applying the equations at an ungaged site should use the most current value of impervious area.

The regression estimates for the 100-year discharges from Equation 18 are plotted versus the gaging station estimates in Figure A3-8. The equal yield or equal discharge line is shown as a point of reference. For the higher discharges, the data points are evenly distributed about the equal yield line. For the smaller discharges (and watersheds), there

is a tendency for the data points to be on one side or the other of the equal yield line. On average, there does not appear to be a significant bias.

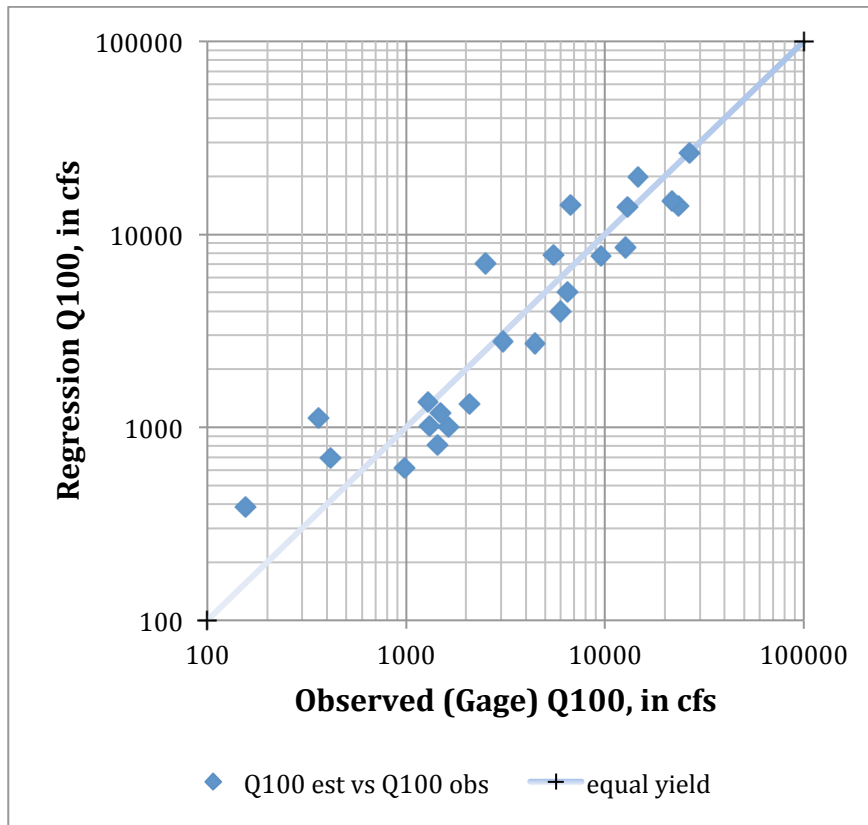


Figure A3-8: Regression estimates for the 100-year flood discharge from Equation 18 plotted versus the gaging station estimates for the Western Coastal Plain Region

Estimates from the existing 100-year equation in Moglen and others (2006) and Appendix 3 of the Hydrology Panel report were compared to estimates from Equation 18 given earlier in this report. The comparisons are shown in Figure A3-9. The existing 100-year equation is based on drainage area, imoervious area and percentage of D soils based on STATSGO data. As shown in Figure A3-9, the existing equation gives estimates about 20 percent higher than Equation 18 for the smaller discharges (and watersheds) and about 20 percent less for the larger discharges (and watersheds). The variation about the best fit line is primarily due to differences in SSURGO and STATSGO data for some of the gaging stations.

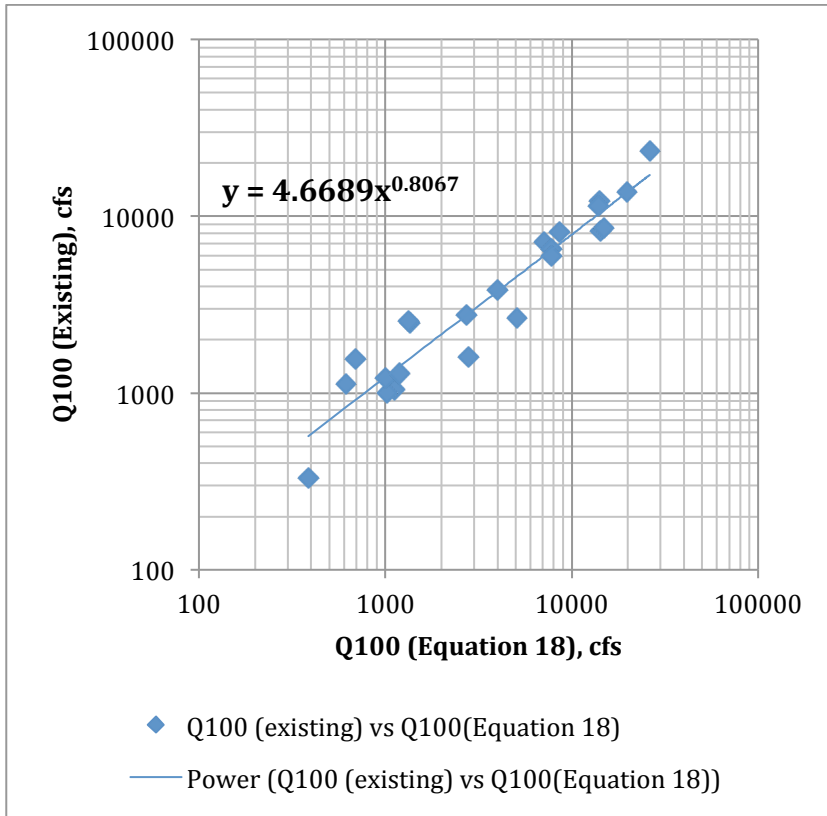


Figure A3-9: Comparison of 100-year estimates for the existing 100-year equation in Moglen and others (2006) and Equation 18 in this report

Summary Comments for the Western Coastal Plain Region

The regression equations for the Western Coastal Plain Region were revised using updated annual peak data for 24 gaging stations in Maryland and SSURGO soils data. Of the 26 stations used in the regression analysis, only 12 stations had updated annual peak data since 1999. The final set of regression equations were based on drainage area, impervious area for 1985, and the sum of the percentages of C and D soils.

Impervious area was available for several time periods including 1985, 1990, 1997, and 2002. For the regression analysis, the impervious area for 1985 was considered to provide the most reasonable equations. For future application of the regression equations at ungaged sites, the current impervious area should be used in the equations.

Table A3.3: Listing of Gaging Stations used in Western Coastal Plain Analysis


| STATION _NO | STATION_NAME | Period of Record | DRAIN_ AREA |
|------------------------|---|-----------------------------|------------------------|
| 01594445 | MILL BRANCH NEAR MITCHELLVILLE, MD | 1967-76 | 1.39 |
| 01594670 | HUNTING CREEK NEAR HUNTINGTOWN, MD | 1989-98 | 9.3 |
| 01660930 | CLARK RN NR BEL ALTON, MD | 1966-76 | 11.2 |
| 01661430 | GLEBE BRANCH AT VALLEY LEE, MD | 1968-78 | 0.3 |
| 01594710 | KILLPECK CREEK AT HUNTERSVILLE, MD | 1986-97 | 3.3 |
| 01660900 | WOLF DEN BRANCH NEAR CEDARVILLE, MD | 1967-80 | 2.3 |
| 01594400* | DORSEY RUN NEAR JESSUP, MD | 1949-68 | 11.9 |
| 01594600 | COCKTOWN CREEK NEAR HUNTINGTOWN, MD | 1958-76 | 3.9 |
| 01594500 | WESTERN BRANCH NEAR LARGO, MD | 1950-74 | 29.5 |
| 01661000 | CHAPTICO CREEK AT CHAPTICO, MD | 1948-72 | 10.5 |
| 01585400 | BRIEN RUN AT STEMMERS RUN, MD | 1959-87 | 1.9 |
| 01653500 | HENSON CREEK AT OXON HILL, MD | 1948-78 | 17.4 |
| 01590500 | BACON RIDGE BRANCH AT CHESTERFIELD, MD | 1944-90 | 7.0 |
| 01590000 | NORTH RIVER NEAR ANNAPOLIS, MD | 1932-73 | 8.9 |
| 01594800 | ST LEONARD CREEK NEAR ST LEONARD, MD | 1958-03 | 6.8 |
| 01594526 | WESTERN BRANCH AT UPPER MARLBORO, MD | 1985-08 | 89.1 |
| 01660920 | ZEKIAH SWAMP RUN NEAR NEWTOWN, MD | 1984-08 | 81.0 |
| 01594440 | PATUXENT RIVER NEAR BOWIE, MD | 1978-08 | 349.7 |
| 01589500* | SAWMILL CREEK AT GLEN BURNIE, MD | 1933-08 | 4.9 |
| 01661050 | ST CLEMENT CREEK NEAR CLEMENTS, MD | 1969-08 | 18.2 |
| 01653600 | PISCATAWAY CREEK AT PISCATAWAY, MD | 1966-08 | 39.7 |
| 01589795 | SOUTH FORK JABEZ BRANCH AT MILLERSVILLE | 1990-08 | 1.0 |
| 01658000 | MATTAWOMAN CREEK NEAR POMONKEY, MD | 1950-08 | 55.8 |
| 01661500 | ST MARYS RIVER AT GREAT MILLS, MD | 1947-08 | 25.3 |
| 01649500 | NE BRANCH ANACOSTIA RIVER AT RIVERDALE | 1933-08 | 73.4 |
| 01651000 | NW BRANCH ANACOSTIA RIVER NEAR HYATTSVILLE | 1933-08 | 49.4 |

*Not used in the regional regression analysis

Regression Equations for the Piedmont, Blue Ridge and Appalachian Plateau Regions in Western Maryland

Previous Investigations in the Piedmont and Blue Ridge Regions

Dillow (1996) and Moglen and others (2006) defined separate sets of regression equations for the Piedmont and Blue Ridge Regions (Figure A3-10). In both analyses, it was assumed that the area of carbonate/limestone rock was confined to the Blue Ridge Region as defined by Dillow (1996). Investigations by the Maryland Hydrology Panel for the September 2010 version of the Panel report (Third Edition) determined that the carbonate rock extends eastward into the Piedmont Region. For the September 2010 version of the Hydrology Panel report, rural gaging stations in the Piedmont and Blue Ridge Regions were used in the same analysis. However, since there are no urban gaging stations (impervious area greater than 10 percent) in the Blue Ridge Region, the urban regression equations documented in the September 2010 version of the Hydrology Panel report were only applicable to the Piedmont Region.

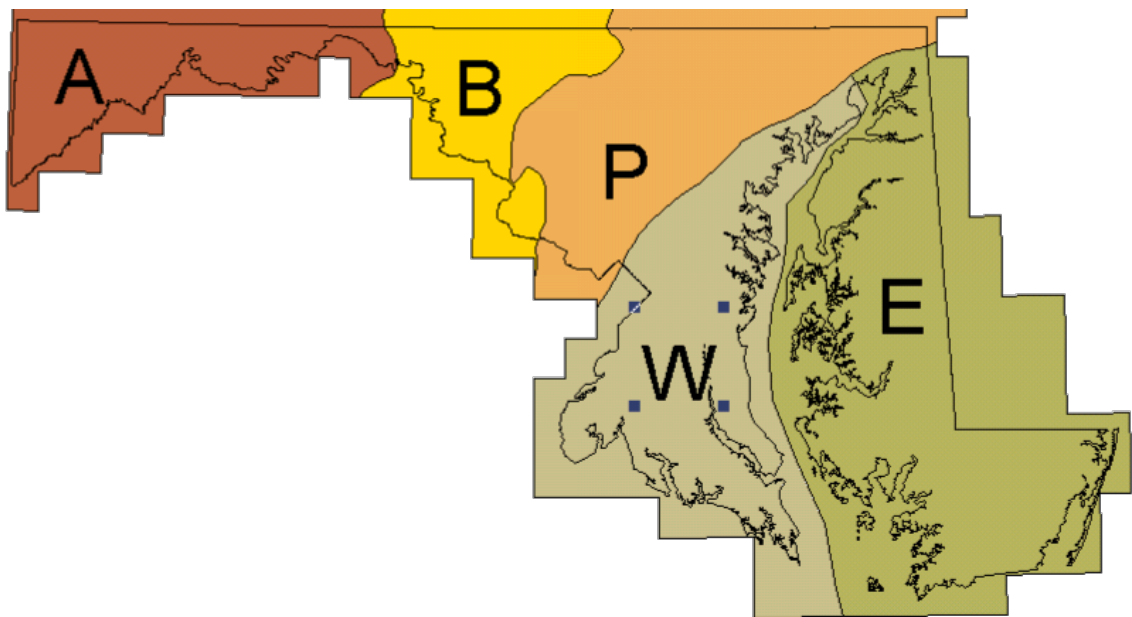

- A = Appalachian Plateau and Allegheny Ridge**
- B = Blue Ridge and Great Valley**
- P = Piedmont**
- W = Western Coastal Plain**
- E = Eastern Coastal Plain**

Figure A3-10: Hydrologic regions for Maryland for which the Blue Ridge and Piedmont Regions were combined for the 2015 western Maryland study

Thomas and Moglen (2015) recently updated the regression equations for the three western regions. A single set of regression equations using both rural and urban watersheds was defined for the combined Piedmont-Blue Ridge Region and separate equations applicable to rural watersheds were developed for the Appalachian Plateau Region. Initially, regression equations were developed by combining data for all three western regions. The regression estimates based on all stations were biased and under-predicted flood discharges for the larger streams in the Appalachian Plateau Region. Statistical tests were performed that indicated the flood characteristics of streams in the Appalachian Plateau Region were statistically different from the streams in the Piedmont-Blue Ridge Region. For these reasons, separate regression equations were developed for the Appalachian Plateau Region.

For the September 2010 version of the Hydrology Panel report, a new carbonate or limestone rock map was developed that extends into Carroll County in the Piedmont Region. This map is shown in Figure A3-11 and was used in determining the percentage of carbonate or limestone rock for the 2015 study (Thomas and Moglen, 2015) for those watersheds in the Piedmont-Blue Ridge Region.

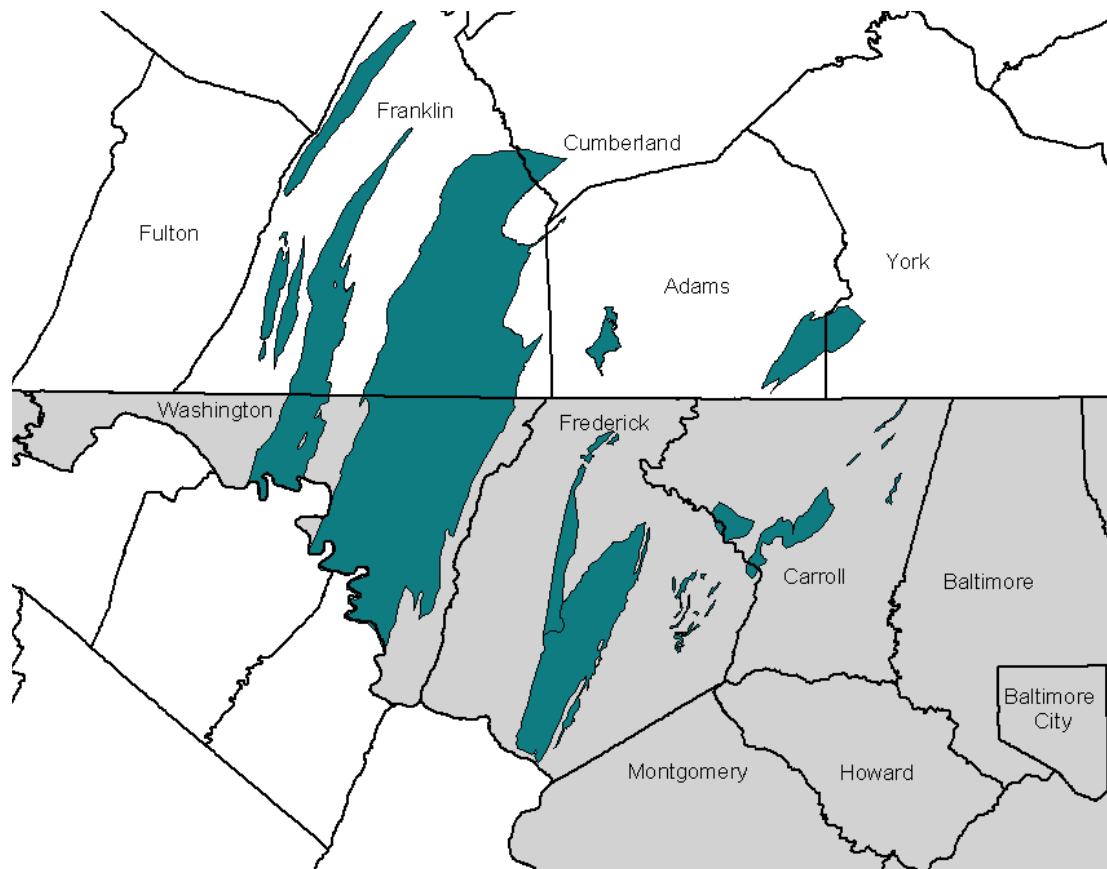


Figure A3-11: Distribution of underlying carbonate/limestone rock in the Piedmont and Blue Ridge Regions of Maryland

Updating Flood Discharges at the Gaging Stations

Frequency analyses (Bulletin 17B) were run for 133 gaging stations, including all current and discontinued stations in the three western regions that have 10 or more years of essentially unregulated annual peak flows through the 2012 water year (Interagency Advisory Committee on Water, 1982). The current regression equations for the Appalachian Plateau, Blue Ridge, and Piedmont Regions, documented in the September 2010 version of the Hydrology Panel report, were based on annual peak data through the 1999 water year. Some of the stations have 13 additional years of record through the 2012 water year. The 133 stations used initially in the new regional regression analysis include the following:

- 55 stations that were discontinued prior to 1999;
- 52 stations with additional data since 1999; and
- 26 new stations with at least 10 years of record.

The locations for the 133 stations in western Maryland are shown in Figure A3-12.

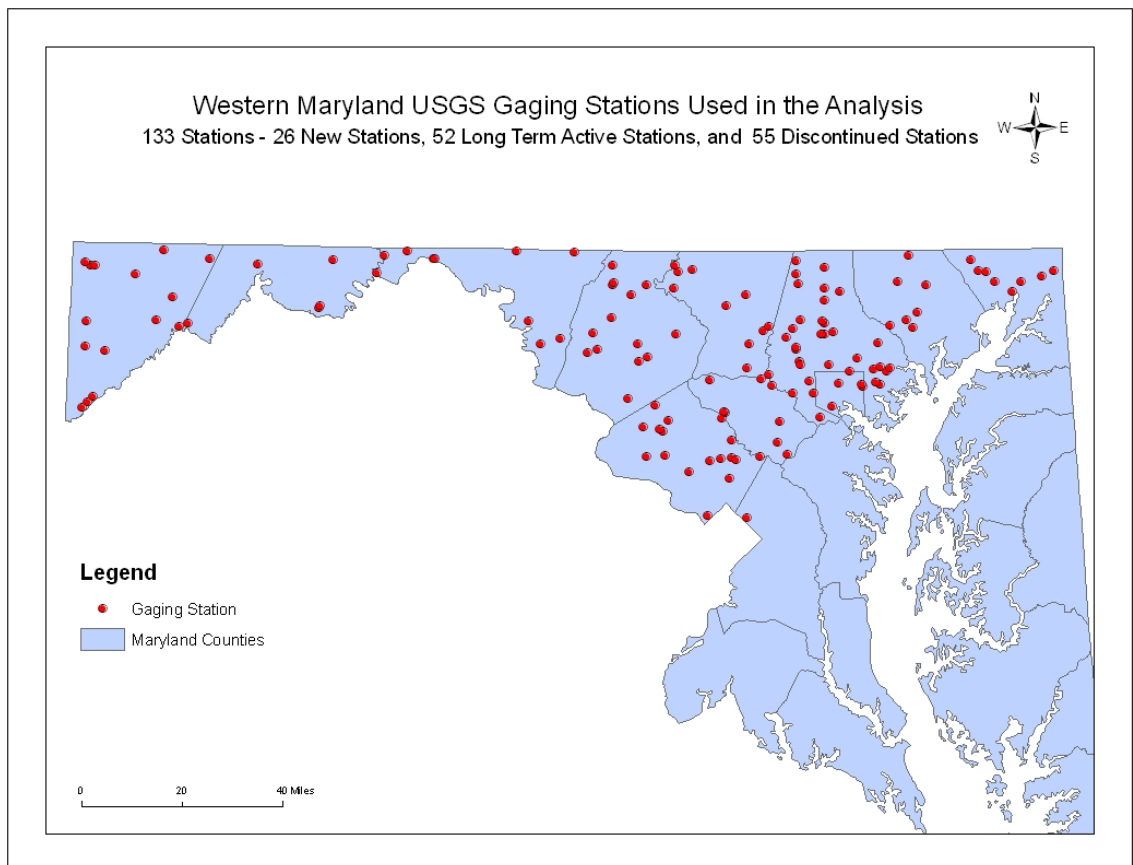


Figure A3-12: Map showing the location of the 133 stations available for updating the regression equations for western Maryland

Regional Skew Analysis

A regional skew analysis was performed by plotting on a map the station skews for 47 **rural** stations (10 percent or less impervious area) with 23 or more years of record. The geographic distribution of the station skews are shown in Figure A3-13. Stations for areas where a significant portion of the watershed was underlain with limestone were omitted from the regional analysis.

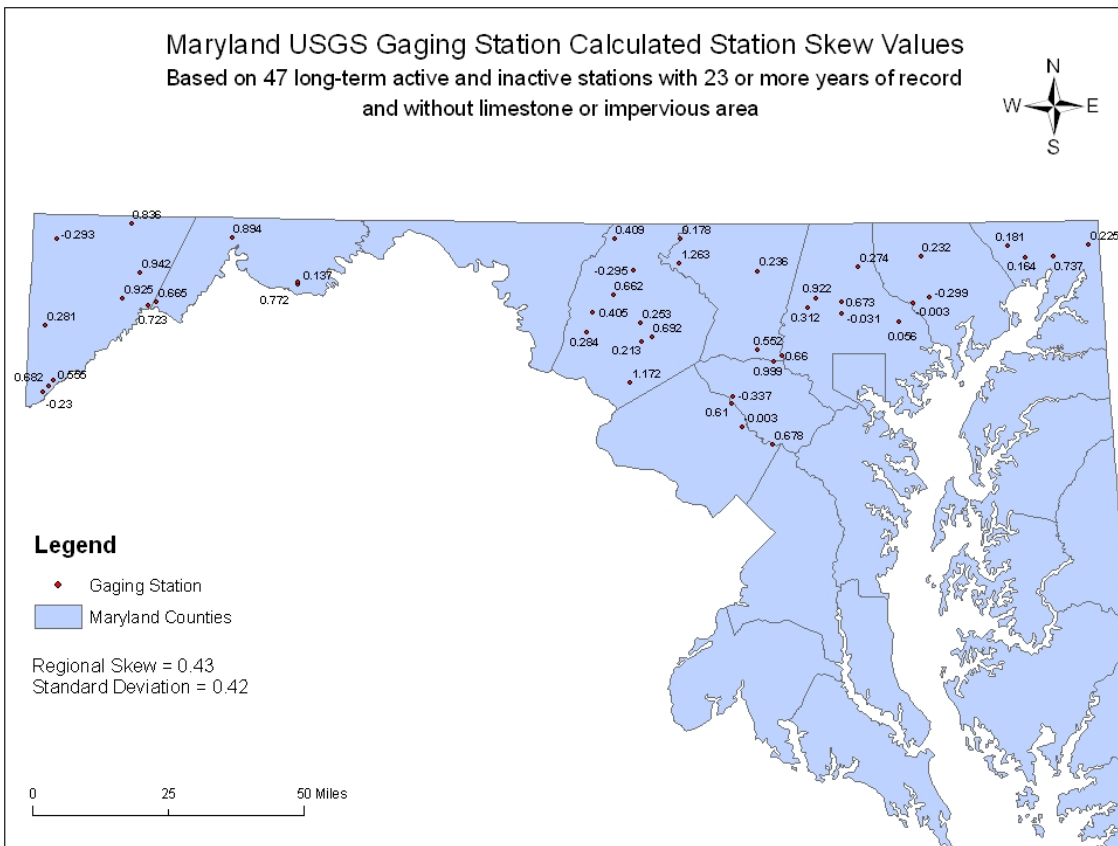


Figure A3-13: Geographic distribution of station skews for 47 long-term stations in Maryland

There is no geographic pattern to the station skews, as shown in Figure A3-13. The average station skew for the 47 stations is 0.43, with a standard deviation (standard error) of 0.42. This contrasts with the regional skew of 0.55 and standard error of 0.45 that were used in the development of the previous regression equations for western Maryland.

The station skews were plotted against drainage area, as shown in Figure A3-14, and no trend with drainage area was observed. A multiple linear regression analysis for skew indicated that the only statistically significant variables for estimating skew were land slope and the percentage of forest cover. Land slope had an inverse relation with skew (steeper slope, smaller skew) and forest cover had a direct relation (higher forest cover,

larger skew). Intuitively, the regression equation did not make sense. Land slope and forest cover are highly correlated, and this correlation may have had an impact on the rationality of the regression equation. The average skew of 0.43 with a standard error of 0.42, as defined above, was considered a more defensible approach.

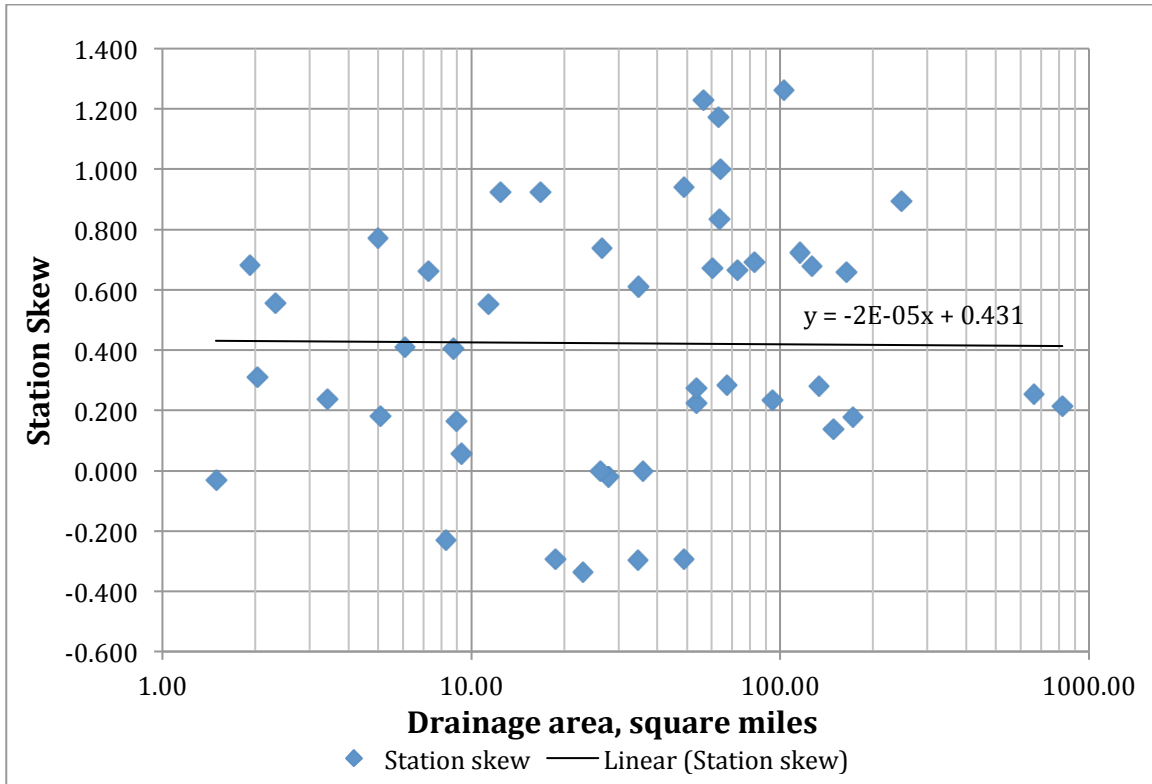


Figure A3-14: Relation between station skew and drainage area for rural stations

Final Flood Frequency Analysis

The flood frequency curves were rerun using a weighted skew (combination of station and regional skew) for the rural watersheds. The station and regional skew were weighted inversely proportional to the Mean Square Error (standard error squared) using procedures described in Bulletin 17B (Interagency Advisory Committee on Water Data, 1982). Station skew was generally used for the urban watersheds, unless the flood discharges based on the weighted skew were more reasonable based on engineering judgment. The following statistics describe the urban gaging stations with impervious area greater than 10 percent (based on Maryland Department of Planning generalized land use):

- 37 stations with impervious area greater than 10 percent;
- 25 stations with impervious area greater than 20 percent;
- 18 stations with impervious area greater than 30 percent;
- 11 stations with impervious area greater than 40 percent; and

- 1 station with impervious area greater than 50 percent (53.5 percent).

For eight stations, the log-Pearson Type III distribution did not provide a reasonable fit to the annual peak flows; therefore, the data were plotted on lognormal probability paper and the frequency curves defined by drawing a smooth curve through the plotting positions. These stations were generally short record stations (17 or fewer years of data) or stations where there appeared to be excessive floodplain storage. The eight stations are listed below:

- Mingo Branch near Hereford (01581940), 10 years of record;
- North Fork Whitemarsh Run near White Marsh (01585095), 17 years of record;
- Moores Run Tributary near Todd Avenue at Baltimore (01585225), 16 years of record;
- Gwynns Falls at Glyndon (01589180), 14 years of record;
- Cabin Branch near Boyds (01644380), 9 years of record (a few stations used in the analysis had 9 years of record);
- Northwest Branch of the Anacostia River at Norwood (01650050), 10 years of record;
- Nursery Run at Cloverly (01650085), 10 years of record; and
- Bear Creek at Friendsville (03076600), 48 years of record (an S-shaped frequency curve likely related to floodplain storage).

In addition, records were extended at four short-record stations to obtain estimated flood discharges that were more representative of long-record stations. This record extension was accomplished by establishing a graphical relationship between concurrent peak flows at the short- and long-term stations and using the T-year flood discharges at the long-term station to estimate comparable values at the short-term station. The four stations with record extensions and the nearby long-term stations are listed below:

- Great Seneca Creek near Quince Orchard (01644600), drainage area of 53.9 square miles, using the long-term record at Seneca Creek at Dawsonville (01645000), drainage area of 102.2 square miles;
- North Branch Rock Creek near Norbeck (01647720), drainage area of 9.68 square miles, using the long-term record at the Northwest Branch Anacostia River near Coleville (01650500), drainage area of 21.2 square miles;
- Little Youghiogeny River Tributary near Deer Park (03075450), drainage area of 0.55 square miles, using the long-term record at the Youghiogeny River near Oakland (03075500), drainage area of 134 square miles; and
- North Branch Casselman River Tributary at Foxtown (03077700), drainage area of 1.07 square miles, using the long-term record at the Casselman River at Grantsville (03078000), drainage area of 62.5 square miles.

The latter two stations are in the Appalachian Plateau Region, and their annual peak data are from 1965 to 1976. This was a drought period in this region, and the flood discharges based on the short period of record are very low. Even though the drainage area of the

long-term station is much larger than that of the short-term station, the flood discharges based on the extended record are considered more accurate than the short-term estimates, due to a reasonable correlation between the annual peak flows for the two stations. The T-year flood discharges for all stations used in the regression analysis are given in Attachment 1.

Overview of the Regional Regression Analysis

Watershed characteristics were determined for all stations using GISHydro2000. The watershed characteristics that were evaluated in the regression analysis included:

- Drainage area, in square miles;
- Channel slope, in feet per mile;
- Land or watershed slope, in feet per foot;
- Percentage of the watershed underlain by limestone;
- Percentage of the watershed with A, B, C, and D soils using the latest SSURGO data; and
- Percentage of the watershed with forest, storage, and impervious area for 1985, 1990, 1997, 2000, 2002, and 2010 land use conditions.

•

For the 55 gaging stations discontinued before 1999, the land use conditions for 2000, 2002, and 2010 were not determined. With the exception of the percentage of soils, the watershed characteristics documented in the September 2010 version of the Hydrology Panel report were used for these 55 discontinued stations. The percentages of A, B, C, and D soils, based on SSURGO data, were determined for the 55 discontinued stations because the SSURGO data were not available at the time of the previous regression analysis.

The percentage of forest cover and percentage of impervious area used in the regression analysis for the current stations were the values near the middle of the gaging station record to be most representative of the annual peak flows. For the stations discontinued before 1999, the 1985 forest cover and impervious area were used, as was the case for the previous regression analysis.

Initially, regression analyses were performed for all 133 stations in one regional analysis with qualitative variables identifying stations in the three physiographic regions (Appalachian Plateau, Blue Ridge, and Piedmont). The qualitative variable for the Appalachian Plateau was statistically significant, implying that the flood discharges for this region were different from those of the other two regions after accounting for the effects of the watershed characteristics. The qualitative variables for the Blue Ridge and Piedmont Regions were not statistically significant, implying that the flood characteristics for the two regions are similar. This result was consistent with that of previous regression analysis, as the Blue Ridge and Piedmont Regions were combined in the 2010 analysis, and a separate region was defined for the Appalachian Plateau.

Several regression analyses were performed for the Piedmont - Blue Ridge Region and the Appalachian Plateau Region, and 11 stations were identified as outliers. Ten outlier stations were in the Piedmont - Blue Ridge Region, and one station was in the Appalachian Plateau Region. The outlier stations were those where the predicted and observed flood discharges differed by a factor of 2 or more; that is, the predicted values were either more than twice the observed value or less than half of the observed value (criteria based on engineering judgment). The 11 stations and the reasons they were omitted from the regression analysis are given below:

- Grave Run near Beckleysville (01581830) – drainage area of 7.56 square miles, 13 years of record, impervious area of 5.4 percent – low annual peaks for the drainage area;
- Slade Run near Glyndon (01583000), drainage area of 2.05 square miles, 36 years of record, impervious area of 1.2 percent – low annual peaks for the drainage area;
- Pond Branch at Oregon Ridge (01583570) – drainage area of 0.131 square miles, 13 years of record, impervious area of 0.0 percent – low annual peaks for the drainage area and significant storage in the watershed;
- Beaverdam Run at Cockeyville (01583600) – drainage area of 20.9 square miles, 29 years of record, impervious area of 22.0 percent – low annual peaks for the drainage area;
- Beaver Run near Finksburg (01586210) – drainage area of 14.1 square miles, 30 years of record, impervious area of 11.9 percent – low annual peaks for the drainage area;
- Gwynns Falls Tributary at McDonogh (01589238) – drainage area of 0.027 square miles, 13 years of record, impervious area of 0.0 percent – very small drainage area with one large flood in a short record, and difficult to get reasonable estimates of the flood discharges;
- Patuxent River near Burtonsville (01592000) – drainage area of 127.0 square miles, 32 years of record, impervious area of 3.1 percent – low annual peaks for the drainage area;
- Little Patuxent River at Guilford (01593500) – drainage area of 38.1 square miles, 80 years of record, impervious area of 18.5 percent – low annual peaks for drainage area;
- Marsh Run at Grimes (01617800) – drainage area of 18.3 square miles, 48 years of record, impervious area of 3.4 percent – 100 percent of watershed underlain with limestone and an outlier even with limestone in the regression equation;
- Piney Creek Tributary at Taneytown (01639095) – drainage area of 0.61 square miles, 10 years of record, impervious area of 11.4 percent – low annual peaks for drainage area; and
- Youghiogheny River Tributary near Friendsville (03076505) – drainage area of 0.21 square miles, 12 years of record, impervious area of 0.0 percent – low annual peaks for the drainage area.

The first five outlier stations are located in an area north of Baltimore, and all have a high percentage of A and B soils. However, the sum of A and B soils was not statistically significant in the regression analysis. The close proximity of these stations suggests there may be a common factor as to why the annual peaks are low. Further research beyond this project is warranted to determine what variables may be causing the low annual peak flows for these stations north of Baltimore.

In addition, two stations were combined with nearby stations due to the small differences in drainage area. The annual peak flows for the short record stations were adjusted using a drainage area ratio and combined with data for the stations with the longer record. The following stations were combined with upstream or downstream stations:

- Patapsco River at Woodstock (01588500), with a drainage area of 251 square miles, was combined with the downstream station 01589000 at Hollofield, with a drainage area of 284.7 square miles and used in the regression analysis; and
- Cattail Creek at Roxbury Mills (01591500), with a drainage area of 27.7 square miles, was combined with the upstream station 01591400 near Glenwood, with a drainage area of 22.9 square miles and used in the regression analysis.
-

Station 01589000 at Hollofield had a combined record length of 23 years of unregulated annual peak flows, including three historical peak flows. Station 01591400 near Glenwood had a combined record length of 46 years. Therefore, a total of 120 stations were used in the regression analysis, 96 stations in the Blue Ridge and Piedmont Regions, and 24 stations in the Appalachian Plateau. The watershed characteristics used in the regression analysis are given in Attachment 2 for the Piedmont-Blue Ridge Region and in Attachment 3 for the Appalachian Plateau Region.

Piedmont and Blue Ridge Regression Analysis

Development of Regression Equations

For the Piedmont and Blue Ridge combined region, based on 96 stations, the most significant watershed characteristics were drainage area (DA) in square miles, percentage of limestone (LIME), percentage of impervious area (IA), and percentage of forest cover (FOR). All variables were converted to logarithms, and a multiple linear regression analysis was performed using the Statistical Analysis System (SAS) package. Regression analyses were also performed without converting LIME, IA, and FOR to logarithms, and the regression equations had essentially equal accuracy to the logarithmic transformed analysis. The exponents in the regression equations varied more logically by recurrence interval with the logarithmic analysis, and those results were used. The equations for the 1.25- to 500-year flood discharges were then converted to exponential form for easier use. They are presented below with the associated standard error of estimate (percent) and the equivalent years of record:

| Equation | Standard Error (%) | Eq. years | |
|--|--------------------|-----------|------|
| $Q_{1_25} = 283.3 DA^{0.724} (LIME+1)^{-0.124} (IA+1)^{0.143} (FOR+1)^{-0.412}$ | 44.3 | 2.8 | (21) |
| $Q_{1_50} = 352.4 DA^{0.704} (LIME+1)^{-0.131} (IA+1)^{0.123} (FOR+1)^{-0.373}$ | 40.9 | 3.2 | (22) |
| $Q_2 = 453.4 DA^{0.683} (LIME+1)^{-0.140} (IA+1)^{0.105} (FOR+1)^{-0.334}$ | 37.5 | 3.7 | (23) |
| $Q_5 = 746.8 DA^{0.640} (LIME+1)^{-0.158} (IA+1)^{0.083} (FOR+1)^{-0.249}$ | 31.9 | 9.2 | (24) |
| $Q_{10} = 972.3 DA^{0.615} (LIME+1)^{-0.169} (IA+1)^{0.076} (FOR+1)^{-0.195}$ | 29.6 | 16 | (25) |
| $Q_{25} = 1,327.6 DA^{0.593} (LIME+1)^{-0.182} (IA+1)^{0.074} (FOR+1)^{-0.145}$ | 29.0 | 25 | (26) |
| $Q_{50} = 1,608.2 DA^{0.576} (LIME+1)^{-0.191} (IA+1)^{0.073} (FOR+1)^{-0.103}$ | 29.8 | 31 | (27) |
| $Q_{100} = 1,928.5 DA^{0.561} (LIME+1)^{-0.198} (IA+1)^{0.073} (FOR+1)^{-0.067}$ | 31.8 | 34 | (28) |
| $Q_{200} = 3,153.5 DA^{0.550} (LIME+1)^{-0.222} (FOR+1)^{-0.090}$ | 35.7 | 32 | (29) |
| $Q_{500} = 3,905.3 DA^{0.533} (LIME+1)^{-0.233} (FOR+1)^{-0.045}$ | 42.0 | 30 | (30) |

The standard error of estimate, expressed in percent, is the standard deviation of the residuals about the regression equation. It is a measure of the agreement between the regression estimates and the gaging station data used in the analysis. The equivalent years of record are defined as the number of years of actual streamflow record required at a site to achieve an accuracy equivalent to the standard error of estimate for the regression equations. Equivalent years of record are used to weight the regression estimate with the gaging station estimate, as described in Chapter Two of this report. The computation of the equivalent years of record is described in Attachment 4.

All explanatory variables are significant at the 5-percent level of significance with the following exceptions: forest cover is statistically significant up to the 50-year flood, and impervious area is statistically significant up to the 100-year flood. The 5-percent level of significance, typically used for including explanatory variables in the regression equations, means there is less than a 5-percent chance of erroneously including a variable in the regression equation. Impervious area and forest cover are correlated, and the exponent on impervious area increased from the 100- to 200-year flood. In addition, impervious area was not statistically significant for the 500-year flood. Therefore, impervious area was omitted from the 200- and 500-year equations because, from a hydrologic perspective, impervious area should not be a major factor for these extreme events.

Rationale for Regression Equations

For Equations 21-30, the drainage area exponent decreases with an increasing recurrence interval, consistent with earlier results. A possible explanation is that the storm rainfall for the more intense storms varies considerably across a watershed and does not have a uniform impact across the entire watershed (that is, the effective drainage area is less).

The limestone exponent is an increasing negative value (inverse relation) with the recurrence interval, implying that the percentage of limestone becomes more important for the larger floods. A likely reason is that the increased rainfall depth in the larger floods leads to more abstraction in the karst watersheds and results in relatively lower runoff volumes. The exponents on impervious area and forest cover decrease with the recurrence interval, implying that impervious area and forest cover have less influence as the floods become larger. This is a well-known result in which soils become more saturated for the larger floods, and impervious area and forest cover have relatively less impact on runoff volumes.

The higher standard errors for the shorter recurrence interval (1.25- to 2-year) floods imply that explanatory variables other than drainage area and the percentage of limestone, impervious area, and forest cover influence these floods. The time-sampling error (error in T-year flood discharge) is actually less for these smaller floods, so one would expect a lower standard error in the regression analysis. Instead, the standard errors of the regression equations for the smaller events are influenced by the model error, indicating that other important explanatory variables may be missing from the equations. The inclusion of forest cover in the regression equations resulted in a reduction of 7 to 9 percent in the standard error for the 1.25- to 2-year floods, but other explanatory variables are missing from the equations that would further reduce the standard error.

As noted above and shown in Table A3-4, the correlation between the logarithms of the percentage of forest cover (l_{for}) and the logarithm of the percentage of impervious area (l_{ia}) is -0.51. This correlation value is statistically different from zero, as indicated by the small p-level of < 0.0001 . The relatively high correlation between impervious area and forest cover is one reason why impervious area was not statistically significant and included as an explanatory variable in the 200- and 500-year equations (Equations 29 and 30).

Table A3-4 indicates several other high correlations between explanatory variables, which explain why other variables, such as channel slope and land slope, were not included in Equations 21-30. For example, the following significant correlations are highlighted in Table A3-4:

- Channel slope (l_{chansl}) is inversely correlated with drainage area (l_{da}) (correlation = -0.84) because small watersheds have large channel slopes and vice versa;
- Land slope (l_{landsl}) is inversely correlated with impervious area (l_{ia}) (correlation = -0.61), implying that steep land slopes are not conducive to development; and
- Land slope (l_{landsl}) and forest cover (l_{for}) are directly correlated (correlation = 0.66), implying that steep land slopes are conducive to forest cover.

Table A3-4: Correlation matrix for selected watershed characteristics for the 96 stations in the Piedmont Piedmont-Blue Ridge Region

| Pearson Correlation Coefficients, N = 96 | | | | | | |
|---|----------|----------|----------|----------|----------|----------|
| Prob > r under H ₀ : ρ = 0 | | | | | | |
| | lda | lia | llime | lfor | llandsl | lchansl |
| lda | 1.00000 | -0.17224 | 0.28320 | 0.33216 | 0.26567 | -0.83946 |
| | | 0.0899 | 0.0047 | 0.0008 | 0.0082 | < 0.0001 |
| lia | -0.17224 | 1.00000 | -0.20246 | -0.51137 | -0.60763 | -0.02424 |
| | 0.0899 | | 0.0456 | < 0.0001 | < 0.0001 | 0.8127 |
| llime | 0.28320 | -0.20246 | 1.00000 | 0.07473 | 0.21665 | -0.17498 |
| | 0.0047 | 0.0456 | | 0.4646 | 0.0321 | 0.0848 |
| lfor | 0.33216 | -0.51137 | 0.07473 | 1.00000 | 0.65964 | -0.03247 |
| | 0.0008 | < 0.0001 | 0.4646 | | < 0.0001 | 0.7510 |
| llandsl | 0.26567 | -0.60763 | 0.21665 | 0.65964 | 1.00000 | 0.13963 |
| | 0.0082 | < 0.0001 | 0.0321 | < 0.0001 | | 0.1703 |
| lchansl | -0.83946 | -0.02424 | -0.17498 | -0.03247 | 0.13963 | 1.00000 |
| | < 0.0001 | 0.8127 | 0.0848 | 0.7510 | 0.1703 | |

Highlighting: sample correlation contradicts the null hypothesis of zero correlation.

The percentages of the watershed in A, B, C, and D soils, based on SSURGO data, were also evaluated as explanatory variables. Consistent with the approach used in the Western Coastal Plain regression analysis in 2010, the sum of A and B soils and the sum of C and D soils were evaluated as explanatory variables. The sum of A and B soils represents higher infiltration soils, and the sum of C and D soils represents lower infiltration soils. Neither these sums were statistically significant for the combined Piedmont-Blue Ridge Region.

Equations 21-30 are applicable to rural and urban watersheds for the following ranges of the explanatory variables:

- Drainage area ranging from 0.111 to 816.4 square miles;
- Percentage of limestone ranging from 0.0 to 81.7 percent;
- Percentage of impervious area ranging from 0.0 to 53.5 percent; and
- Percentage of forest cover ranging from 0.5 to 100 percent.

Other sets of regression equations that were developed include the following:

- Regression equations applicable to rural and urban watersheds based on drainage area, limestone, and impervious area, omitting forest cover; and
- Separate regression equations for rural watersheds (drainage area, limestone, and forest cover) and urban watersheds (drainage area, limestone, and impervious area).
-

Based on review comments from the Maryland SHA and the Hydrology Panel, both impervious area and forest cover (up to the 100-year flood) were used as indicators of urbanization or the lack of urbanization. In addition, the separate regression equations for rural and urban watersheds did not exhibit good agreement for watersheds with 10 percent impervious area, the breakpoint for determining whether the watershed was rural or urban. One set of regression equations for both rural and urban watersheds (Equations 21-30) resolved the issue of the discontinuity of estimates in transitioning from rural to urban watersheds.

In Figure A3-15 the regression estimates of the 100-year flood discharge from Equation 28 were plotted against the gaging station estimates to illustrate the variability of the estimates. The green lines in Figure A3-15 are plus and minus one standard error of estimate (plus 36.4 percent and minus 26.7 percent, for an average of 31.8 percent). Plus or minus one standard error encompasses approximately two thirds of the data, implying that one third, or 32 stations, should fall outside the green lines in Figure A3-15. The data in Figure A3-15 illustrate the linear relation between the estimated and observed 100-year discharges. Although the regression equation has a tendency to underestimate the 100-year flood for discharges greater than 30,000 cfs, no reason or correction for this tendency was determined.

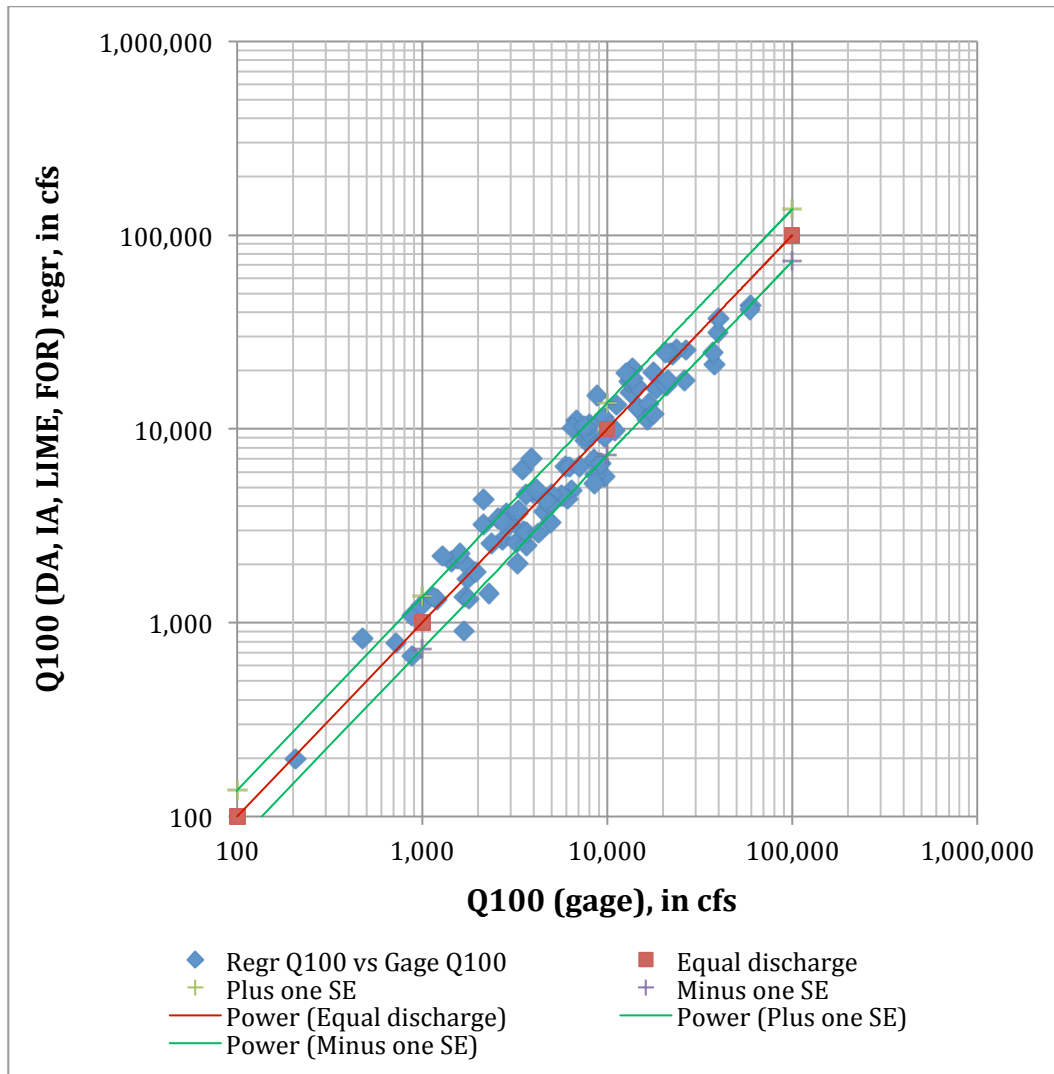


Figure A3-15: Comparison of the estimated 100-year discharges from Equation 28 to the gaging station estimates

Figure A3-16 presents a similar graph, comparing the regression estimates (Equation 25) to the gaging station estimates for the 10-year flood discharge. The green lines in Figure A3-16 are plus and minus one standard error of estimate (plus 33.6 percent and minus 25.2 percent, for an average of 29.6 percent). The data in Figure A3-16 illustrate the linear relation between the estimated and observed 10-year discharges. Although the regression equation has a tendency to underestimate the 10-year flood for discharges greater than about 15,000 cfs, no reason or correction for this tendency was determined.

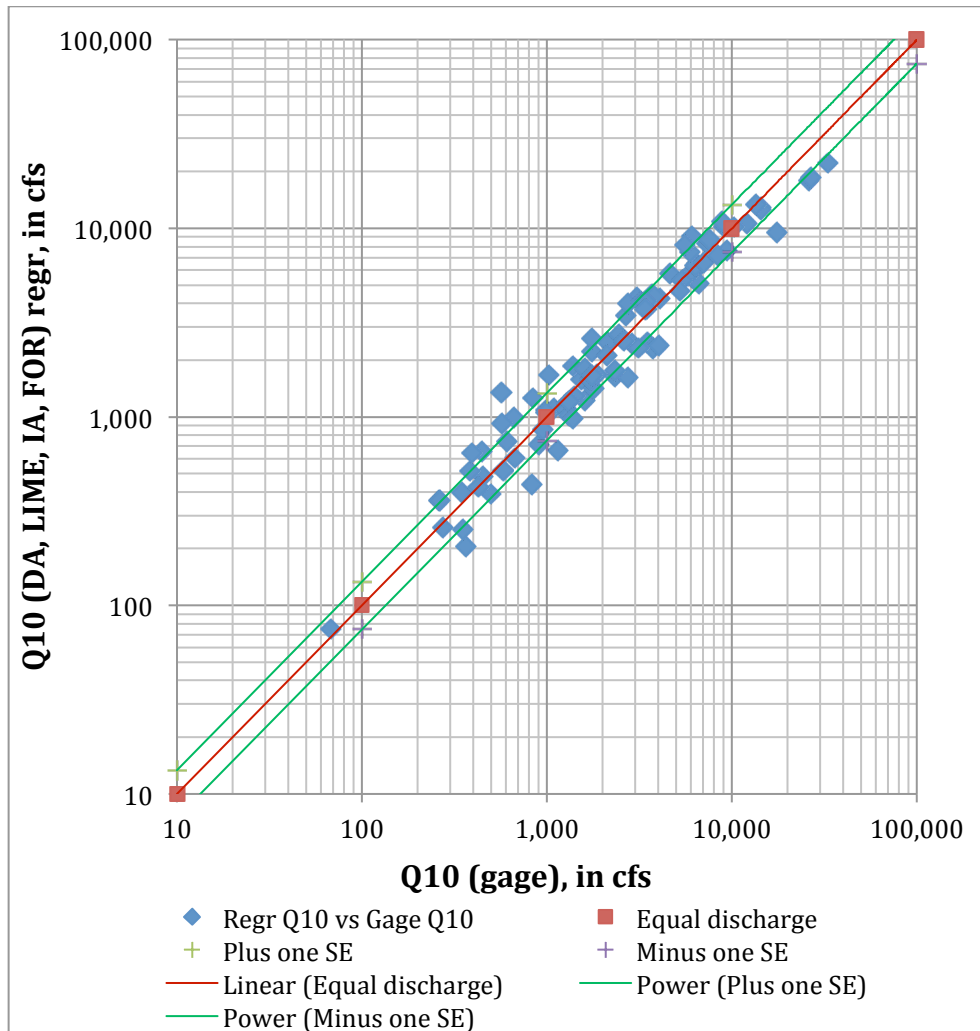


Figure A3-16: Comparison of the estimated 10-year discharges from Equation 25 to the gaging station estimates

COMPARISONS OF THE CURRENT AND 2010 REGRESSION EQUATIONS

Of the three western regions in Maryland, urban regression equations are only available in the 2010 Hydrology Panel report for the Piedmont Region. When the previous regression analysis was completed in 2006, only 16 stations in the Piedmont Region had an impervious area of 10 percent or greater and 10 years or more of annual peak flows. The 16 urban stations were used to define regression equations based on drainage area and the percentage of impervious area. These equations were documented in the August 2006 and September 2010 versions of the Hydrology Panel report.

For the current analysis, 32 stations with impervious area of 10 percent or greater were used in the regression analysis for the Piedmont-Blue Ridge Region.

The 100- and 10-year floods estimated from the regression equations developed for this analysis (Equation 28 and Equation 25, respectively) were compared with the 2010 urban and rural regression equations for the Piedmont Region. Figure A3-17 compares the 100-year estimates from the 2010 urban equation, based on drainage area and impervious area, to estimates from Equation 28 for the 32 stations used in the current (2015) analysis. As shown in Figure A3-17, the two sets of equations give nearly the same 100-year estimates, with a slight tendency for the 2015 equation to give higher estimates for the smaller watersheds and lower estimates for the larger watersheds.

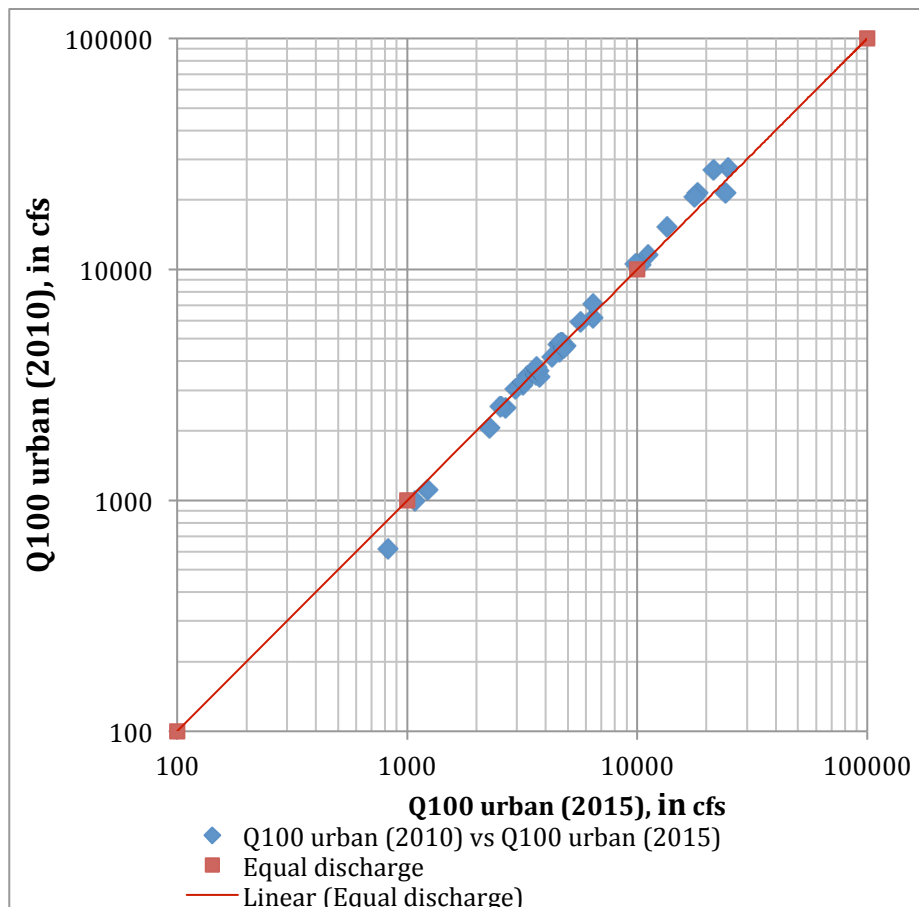


Figure A3-17: Comparison of 100-year flood discharges from the 2010 urban equation to estimates from Equation 28 for the 32 urban stations used in the 2015 analysis

Figure A3-18 compares the 10-year flood estimated from the 2010 urban equation, based on drainage area and impervious area, to estimates from Equation 25 using the 32 stations from the current (2015) analysis. On average, the 2015 equation (Equation 25) gives 10-year estimates about 17 percent less than the 2010 equation.

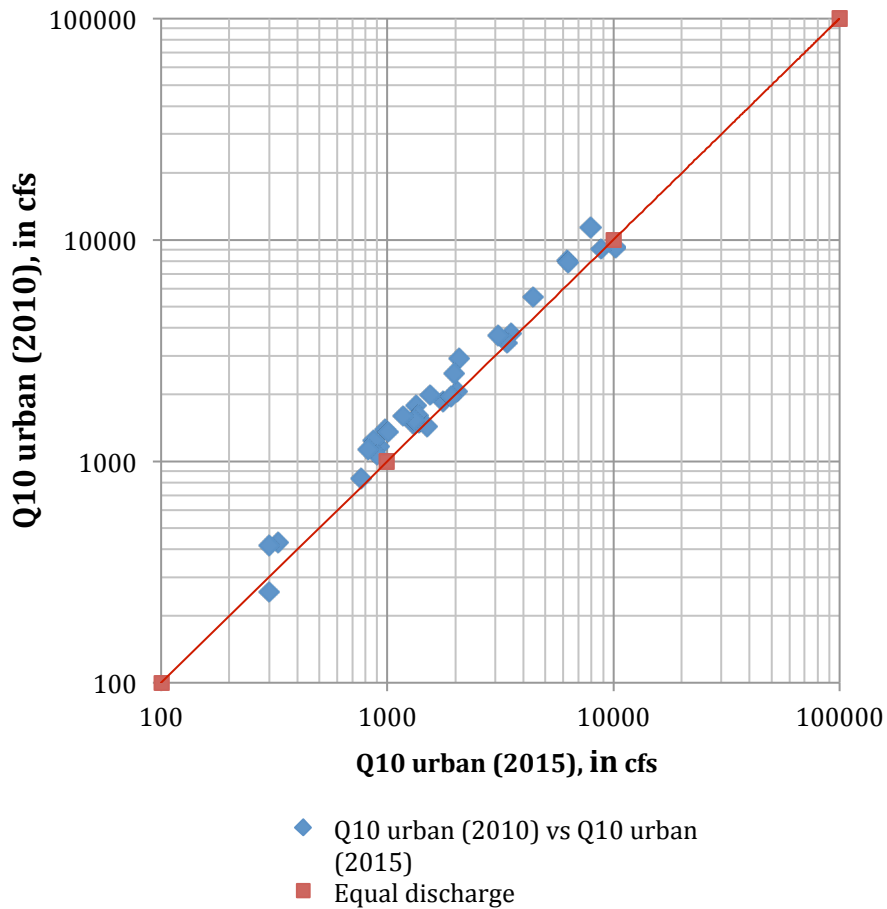


Figure A3-18: Comparison of 10-year flood discharges from the 2010 urban equation to estimates from Equation 25 for the 32 urban stations used in the 2015 analysis

Similar comparisons were made for the 100- and 10-year floods for the 64 rural stations used in the current (2015) analysis. Figure A3-19 compares the 100-year flood estimated from the 2010 rural equation, based on drainage area and the percentage of limestone and forest cover, to estimates from Equation 28 for the current analysis. As shown in Figure A3-19, the 2015 equation (Equation 28) gives higher estimates for the smaller watersheds and lower estimates for the largest watersheds.

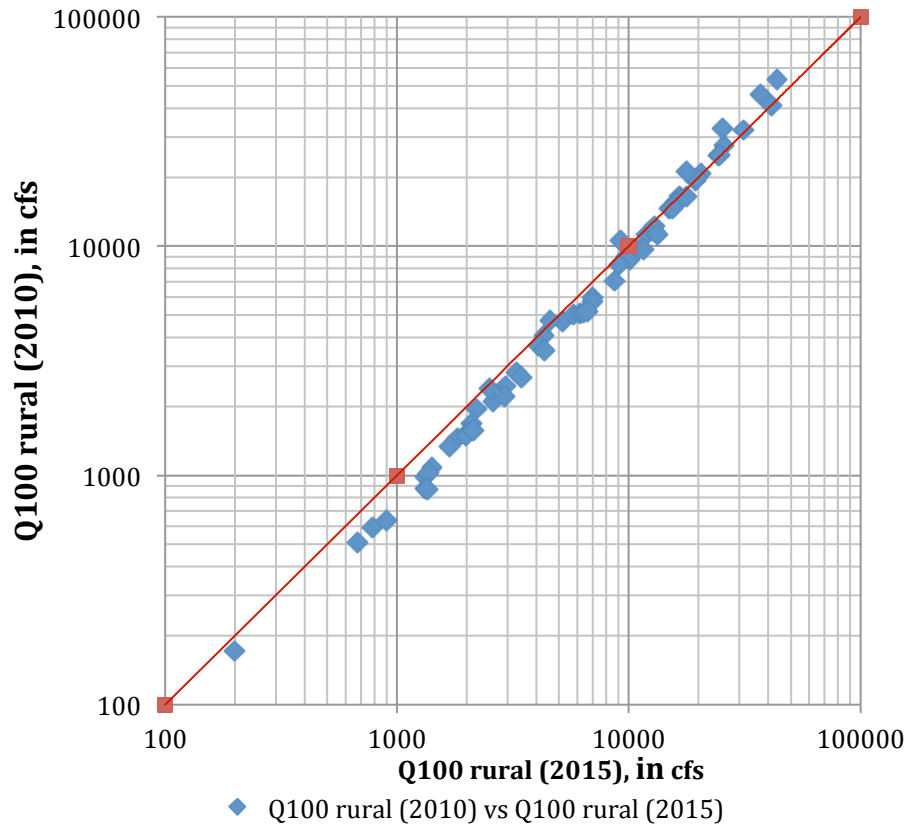


Figure A3-19: Comparison of 100-year flood discharges from the 2010 rural equation to estimates from Equation 28 for the 64 rural stations used in the 2015 analysis

Figure A3-20 compares the 10-year flood estimates from the 2010 rural equation, based on drainage area and the percentage of limestone and forest cover, to estimates from Equation 25 for the current analysis. As shown in Figure A3-20, the 2015 equation (Equation 25) gives higher estimates for the smaller watersheds and lower estimates for the largest watersheds.

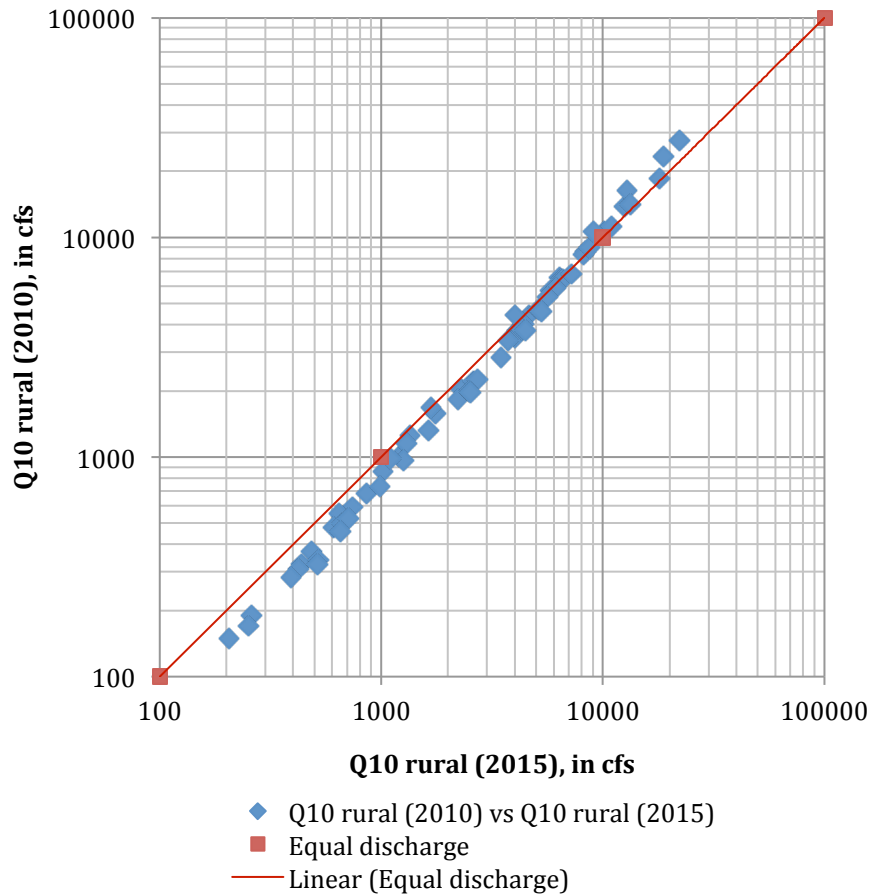


Figure A3-20. Comparison of 10-year flood discharges from the 2010 rural equation to estimates from Equation 25 for the 64 rural stations used in the 2015 analysis

In summary, the comparisons between the 2010 regression equations and the new regression equations (Equations 28 and 25) for the Piedmont-Blue Ridge Region revealed the following:

- The 2015 equation (Equation 28) and the 2010 urban equation give nearly the same estimates for urban watersheds for the 100-year flood;
- The 2015 equation (Equation 25) for the 10-year flood gives estimates for urban watersheds that average about 17 percent less than the 2010 urban equation;
- The 2015 equation (Equation 28) for the 100-year flood in rural watersheds gives higher estimates for the smaller watersheds and lower estimates for the largest watersheds than the 2010 rural equation; and
- The 2015 equation (Equation 25) for the 10-year flood in rural watersheds gives higher estimates for the smaller watersheds and lower estimates for the larger watersheds than the 2010 rural equation.

Appalachian Plateau Region Regression Analysis

Development of Regression Equations

For the Appalachian Plateau, based on 24 stations, the two most significant watershed characteristics are drainage area (DA) in square miles and land (watershed) slope (LSLOPE) in feet per foot. As discussed earlier, the Youghiogheny River Tributary near Friendsville (03076505) gaging station was deleted from the analysis as an outlier. The annual flood peaks were very low for this 0.21-square-mile watershed. The Youghiogheny River Tributary station was also considered an outlier in the 2006 analysis. The Appalachian Plateau regression equations were not updated in the 2010 Hydrology Panel report so this current analysis is the first update since 2006.

Land slope was only significant at the 10-percent level up to the 50-year flood. LSLOPE was included in the regression equations because it reduces the standard error of all the recurrence interval floods, consistent with the 2006 analysis, and makes the equations more robust in a predictive mode. As with the Piedmont-Blue Ridge Region analysis, all variables were converted to logarithms, and a multiple linear regression analysis was performed using SAS. The equations for the 1.25- to 500-year flood discharges were then converted to exponential form for easier use and are presented below with the associated standard error and equivalent years of record:

| Equation | Standard error (%) | Eq. years | |
|---|--------------------|-----------|------|
| $Q_{1.25} = 71.0 DA^{0.848} LSLOPE^{0.342}$ | 30.9 | 1.2 | (31) |
| $Q_{1.5} = 86.3 DA^{0.837} LSLOPE^{0.312}$ | 23.3 | 3.7 | (32) |
| $Q_2 = 112.7 DA^{0.829} LSLOPE^{0.310}$ | 21.1 | 6.6 | (33) |
| $Q_5 = 199.1 DA^{0.813} LSLOPE^{0.339}$ | 21.1 | 11 | (34) |
| $Q_{10} = 272.2 DA^{0.801} LSLOPE^{0.338}$ | 24.5 | 12 | (35) |
| $Q_{25} = 416.9 DA^{0.794} LSLOPE^{0.380}$ | 27.9 | 14 | (36) |
| $Q_{50} = 570.5 DA^{0.790} LSLOPE^{0.422}$ | 32.5 | 14 | (37) |
| $Q_{100} = 722.0 DA^{0.783} LSLOPE^{0.429}$ | 37.1 | 13 | (38) |
| $Q_{200} = 914.5 DA^{0.777} LSLOPE^{0.445}$ | 42.6 | 12 | (39) |
| $Q_{500} = 1,174.3 DA^{0.768} LSLOPE^{0.437}$ | 49.8 | 11 | (40) |

The standard error of estimate, expressed in percent, is the standard deviation of the residuals about the regression equation. It is a measure of the agreement between the regression estimates and the gaging station data used in the analysis. The equivalent years of record are defined as the number of years of actual streamflow record required at a site to achieve an accuracy equivalent to the standard error of estimate for the regression

equations. Equivalent years of record are used to weight the regression estimate with the gaging station estimate, as described in Chapter Two of this report. The computation of the equivalent years of record is described in Attachment 4.

Regression analyses were also performed by including the Appalachian Plateau stations in an analysis with the Piedmont-Blue Ridge stations and using a qualitative variable to account for differences in the Appalachian Plateau Region (total of 120 stations). The regression equations, based on 120 stations, had a significant bias for under-predicting flood discharges for the larger watersheds in the Appalachian Plateau Region. Therefore, the equations above, based on a separate Appalachian Plateau Region, were considered more reasonable.

Rationale for the Regression Equations

For Equations 31-40, the drainage area exponent decreases with drainage area, the same trend observed for the Piedmont-Blue Ridge Region. For the larger storms, the rainfall intensity tends to vary across the watershed so that all parts of the watershed do not contribute equally to runoff. The drainage area exponents are larger than for the Piedmont-Blue Ridge Region, implying that the storms are more uniform or tend to cover more of the watershed. The Piedmont-Blue Ridge Region is more susceptible to the more intense storms from hurricane events. The land slope exponent increases with the recurrence interval, probably because the slope of the watershed becomes more critical to the runoff process as the flood magnitudes increase.

The standard errors for Equations 31-40 are slightly higher than the 2006 standard errors. Only one new station was added to the regression analysis. Channel slope is also significant at the 10-percent level for many recurrence interval floods, being the third most significant variable after drainage area and land slope. However, using land slope rather than channel slope results in lower standard errors for the regression equations. Table A3-5 shows the correlations between the logarithms of selected watershed characteristics for the 24 stations in the Appalachian Plateau Region. Some significant correlations are as follows:

- Channel slope (l_{chansl}) and drainage area (l_{da}) have a correlation of -0.73;
- Land slope (l_{lands1}) and drainage area (l_{da}) have a correlation of 0.58; and
- Forest cover (l_{for}) and impervious area (l_{ia}) have a correlation of -0.58.

Land slope and drainage area have a lower correlation than channel slope and drainage area, so land slope is explaining more variability than channel slope in a regression equation including drainage area. Forest cover and impervious area are not statistically significant, because forest cover does not exhibit much variability at the gaged watersheds in the Appalachian Plateau Region and impervious area has a very limited range (from 0 to 4.2 percent).

Table A3-5: Correlation matrix for selected watershed characteristics for the 24 stations in the Appalachian Plateau Region

| Pearson Correlation Coefficients, N = 24 | | | | | |
|---|----------|----------|----------|----------|----------|
| Prob > r under H ₀ : ρ = 0 | | | | | |
| | lda | lia | lfor | lslope | lchansl |
| lda | 1.00000 | 0.46560 | -0.27400 | 0.58168 | -0.72999 |
| | | 0.0219 | 0.1951 | 0.0029 | < 0.0001 |
| lia | 0.46560 | 1.00000 | -0.57959 | 0.26817 | -0.28976 |
| | 0.0219 | | 0.0030 | 0.2052 | 0.1696 |
| lfor | -0.27400 | -0.57959 | 1.00000 | 0.08779 | 0.36722 |
| | 0.1951 | 0.0030 | | 0.6833 | 0.0775 |
| lslope | 0.58168 | 0.26817 | 0.08779 | 1.00000 | -0.15633 |
| | 0.0029 | 0.2052 | 0.6833 | | 0.4657 |
| lchansl | -0.72999 | -0.28976 | 0.36722 | -0.15633 | 1.00000 |
| | < 0.0001 | 0.1696 | 0.0775 | 0.4657 | |

Highlighting: sample correlation contradicts the null hypothesis of zero correlation.

Watershed shape was also evaluated as a possible explanatory variable in the Appalachian Plateau Region. Watershed shape was defined as channel length squared divided by drainage area, essentially a measure of the length of the watershed divided by the width of the watershed. The watershed shape factor was not statistically significant.

The sums of A and B soils and C and D soils were also evaluated. The sum of C and D soils does not vary much across the gaging stations in the Appalachian Plateau Region and was not statistically significant. The sum of A and B soils was statistically significant for recurrence intervals of 10 years and less and reduced the standard error somewhat from the equations using drainage area and land slope. However, for recurrence intervals of 25 years and greater, the sum of A and B soils was not significant, and the standard errors were higher than the equations using drainage area and land slope. The latter variables were judged to be the two best variables for predicting flood discharges in the Appalachian Plateau.

Equations 31-40 are applicable to rural watershed for the following ranges of the explanatory variables:

- Drainage area ranging from 0.52 to 294.14 square miles, and
- Land slope ranging from 0.066 to 0.227 ft/ft.

Comparison of 2006 and 2015 Regression Equations

The 100-year flood discharges from the current (2015) equation (Equation 38) were compared to the 100-year discharges from the 2006 equations. As shown in Figure A3-21, the two equations, both based on drainage area and land slope, give about the same estimates for the 24 gaging stations. There is a slight tendency for the 2006 equations to give higher estimates for the larger watersheds and for the 2015 equations to give higher estimates for the smaller watersheds.

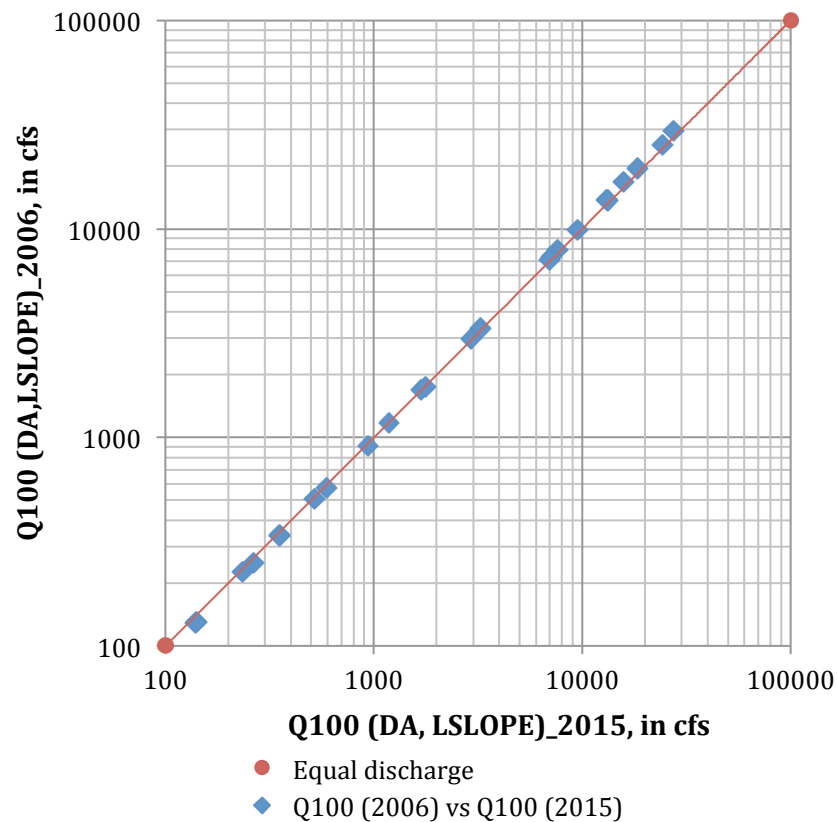


Figure A3-21: Comparison of 100-year flood discharges from the 2006 and 2015 equations using the 24 gaging stations in the Appalachian Plateau Region

The same comparison was made for the 10-year flood discharges. The 2015 flood discharges are based on Equation 35. The results, in Figure A3-22, are essentially the same as for the 100-year flood, where the 2006 equations give slightly higher estimates

for the larger watersheds and the 2015 equations give slightly higher estimates for the smaller watersheds. The 2015 equations for the 100- and 10-year flood discharges have not changed much from the 2006 equations, which are published in both the August 2006 and September 2010 versions of the Hydrology Panel report.

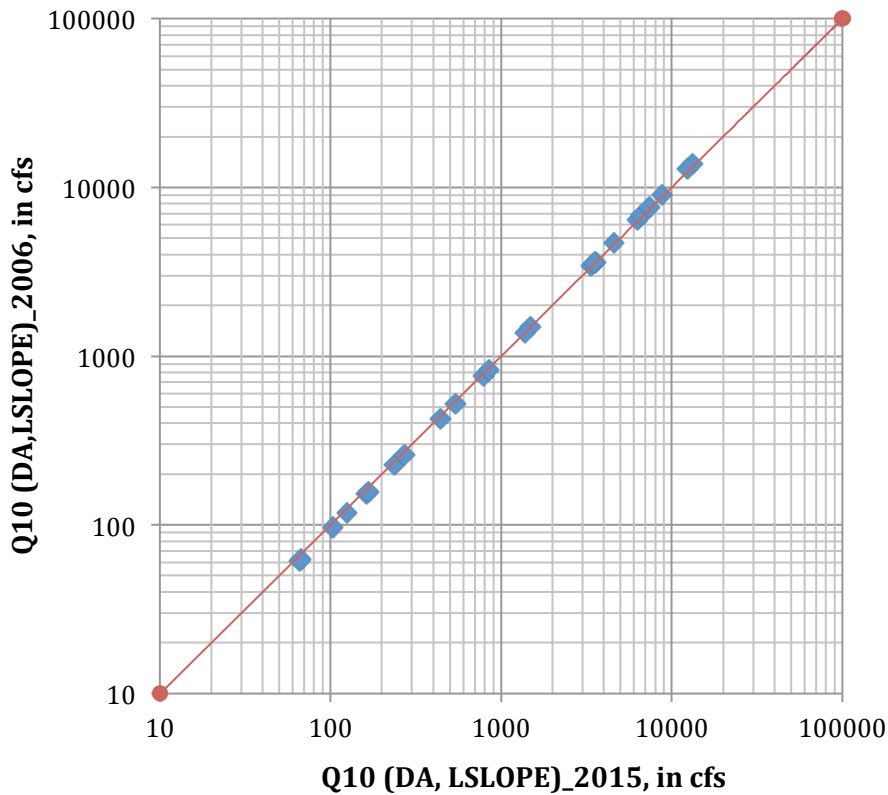


Figure A3-22: Comparison of 10-year flood discharges from the 2006 and 2015 equations using the 24 gaging stations in the Appalachian Plateau Region

Summary

The regression equations for estimating the 1.25-, 1.5-, 2-, 5-, 10-, 25-, 50-, 100-, 200-, and 500-year flood discharges were updated for the combined Piedmont-Blue Ridge Region and the Appalachian Plateau Region in western Maryland. A new regional skew analysis was performed, and flood frequency curves were updated and revised for 133 stations, including 55 stations that were discontinued prior to 1999, 52 stations with additional data since 1999 (additional 13 years of record), and 26 new stations with at least 10 years of record. Most of the new stations are urban watersheds in Baltimore County or the City of Baltimore.

Eleven stations were identified as outliers in the regression analysis and two stations were combined with nearby stations, resulting in 120 stations being used in the regression analysis: 96 stations in the Piedmont-Blue Ridge Region and 24 stations in the Appalachian Plateau Region. The final regression equations for the Piedmont-Blue Ridge Region were based on drainage area in square miles and the percentages of limestone, impervious area, and forest cover. These were the most statistically significant explanatory variables across all recurrence intervals. With the addition of the new stations in Baltimore County and the City of Baltimore, there are now 37 stations with impervious area greater than 10 percent (only 32 urban stations were used in equations), based on the Maryland Office of Planning generalized land use data. The urban regression equations documented in the September 2010 Hydrology Panel report are only applicable to the Piedmont Region and were based on just 16 stations. Equations 21-30 are now applicable to urban watersheds in the Piedmont and Blue Ridge Regions.

A comparison of the new urban equations to the previous equations for the Piedmont Region revealed that the 100-year discharge estimates from the 2015 and 2010 equations are nearly the same for the 32 stations used in the current (2015) analysis. The same comparison for the 10-year discharge estimates indicated that the new equation gives estimates approximately 17 percent higher than the 2010 urban equation. The new equations are based on more data and are more defensible.

Comparison of the new regression equations for the 100- and 10-year discharges to the 2010 equations for the Piedmont-Blue Ridge Region indicated that the 2015 equations give higher estimates for the smaller watersheds and lower estimates for the larger watersheds. The differences are not large, and the 2015 equations are considered more defensible since they are based on more data.

The final regression equations for the Appalachian Plateau are based on drainage area in square miles and land slope in feet per foot, the same explanatory variables used in the 2006 analysis. Comparisons of the new and previous equations indicate little difference for the 100- and 10-year flood discharges, because only one new station was added to the Appalachian Plateau Region analysis.

Equations 21-30 will replace the following equations in the September 2010 version of the Hydrology Panel report:

- Rural equations for the combined Piedmont-Blue Ridge Region; and
- Urban equations for the Piedmont Region.
-

Equations 31-40 will replace the equations in the September 2010 version of the Hydrology Panel report for the Appalachian Plateau Region.

The regression equations documented in this report are based on updated annual peak data through the 2012 water year where the data are available. This is an additional 13 years of record at many of the gaging stations including several major floods that

occurred since 1999. In addition, 26 new stations (mostly urban stations) were used in the regression analysis. The number of urban gaging stations used in the regression analysis doubled from 16 to 32 stations for the current analysis. The regression equations (Equations 21-30) for the Piedmont-Blue Ridge Region are applicable to both rural and urban watersheds. The regression equations for the Appalachian Plateau Region (Equations 31-40) are only applicable to rural watersheds and give essentially the same estimates of the T-year discharges as the previous equations but are based on additional data.

Attachment 1. T-year flood discharges (QT) for the 120 stations used in the regression analysis for the Piedmont-Blue Ridge Region and the Appalachian Plateau Region

| Station Number | Q1.25 (cfs) | Q1.50 (cfs) | Q2 (cfs) | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q200 (cfs) | Q500 (cfs) |
|-----------------------|--------------------|--------------------|-----------------|-----------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|
| 01495000 | 1790 | 2250 | 2890 | 4850 | 6450 | 8860 | 10950 | 13300 | 16000 | 20000 |
| 01495500 | 1320 | 1440 | 1650 | 2440 | 3230 | 4650 | 6100 | 7990 | 10400 | 14800 |
| 01496000 | 1010 | 1220 | 1540 | 2530 | 3400 | 4760 | 6010 | 7480 | 9220 | 12000 |
| 01496080 | 125 | 212 | 280 | 491 | 668 | 935 | 1170 | 1430 | 1730 | 2190 |
| 01496200 | 617 | 808 | 1090 | 2120 | 3110 | 4820 | 6490 | 8590 | 11200 | 15600 |
| 01577940 | 92 | 118 | 156 | 293 | 427 | 663 | 899 | 1200 | 1580 | 2240 |
| 01578500 | 2490 | 3280 | 4480 | 8920 | 13400 | 21200 | 29200 | 39500 | 52500 | 75300 |
| 01578800 | 272 | 340 | 432 | 700 | 909 | 1210 | 1460 | 1730 | 2030 | 2460 |
| 01579000 | 441 | 591 | 816 | 1600 | 2330 | 3540 | 4700 | 6090 | 7780 | 10500 |
| 01580000 | 2430 | 2950 | 3660 | 5700 | 7290 | 9580 | 11500 | 13600 | 15900 | 19400 |
| 01580200 | 2890 | 3580 | 4550 | 7610 | 10200 | 14200 | 17800 | 21900 | 26700 | 34200 |
| 01581500 | 756 | 962 | 1250 | 2140 | 2870 | 3960 | 4910 | 5980 | 7180 | 9000 |
| 01581700 | 1270 | 1830 | 2600 | 4800 | 6360 | 8340 | 9790 | 11200 | 12600 | 14300 |
| 01581752 | 276 | 365 | 502 | 1010 | 1530 | 2440 | 3370 | 4560 | 6090 | 8740 |
| 01581810 | 686 | 897 | 1220 | 2360 | 3470 | 5410 | 7320 | 9720 | 12700 | 17900 |
| 01581870 | 531 | 690 | 930 | 1810 | 2670 | 4190 | 5700 | 7630 | 10100 | 14300 |
| 01581940 | 36 | 53 | 83 | 225 | 495 | 730 | 1140 | 1700 | 2500 | 4100 |
| 01581960 | 491 | 618 | 794 | 1320 | 1740 | 2370 | 2900 | 3490 | 4150 | 5140 |
| 01582000 | 1500 | 1820 | 2270 | 3570 | 4600 | 6100 | 7380 | 8790 | 10400 | 12700 |
| 01582510 | 112 | 178 | 288 | 715 | 1140 | 1840 | 2500 | 3280 | 4190 | 5620 |
| 01583100 | 524 | 636 | 796 | 1310 | 1760 | 2460 | 3110 | 3880 | 4780 | 6230 |
| 01583495 | 52 | 77 | 116 | 249 | 367 | 547 | 705 | 881 | 1080 | 1370 |
| 01583500 | 1240 | 1630 | 2210 | 4330 | 6420 | 10100 | 13800 | 18500 | 24400 | 34800 |
| 01583580 | 45 | 68 | 107 | 268 | 443 | 768 | 1110 | 1550 | 2110 | 3100 |
| 01583979 | 500 | 625 | 789 | 1260 | 1610 | 2110 | 2520 | 2960 | 3430 | 4100 |
| 01584050 | 310 | 441 | 645 | 1400 | 2150 | 3440 | 4690 | 6240 | 8140 | 11300 |
| 01584500 | 1460 | 1930 | 2610 | 4790 | 6630 | 9440 | 11900 | 14700 | 17900 | 22700 |
| 01585090 | 704 | 844 | 1020 | 1480 | 1790 | 2200 | 2520 | 2840 | 3170 | 3620 |
| 01585095 | 320 | 340 | 405 | 680 | 980 | 1500 | 2050 | 2700 | 3600 | 5000 |
| 01585100 | 1140 | 1370 | 1690 | 2670 | 3490 | 4740 | 5840 | 7100 | 8550 | 10800 |
| 01585104 | 337 | 415 | 521 | 838 | 1090 | 1470 | 1790 | 2140 | 2540 | 3140 |
| 01585200 | 421 | 559 | 749 | 1300 | 1720 | 2310 | 2770 | 3270 | 3780 | 4519 |
| 01585225 | 134 | 142 | 156 | 210 | 260 | 333 | 400 | 475 | 560 | 680 |
| 01585230 | 1400 | 1680 | 2040 | 3030 | 3760 | 4760 | 5560 | 6410 | 7320 | 8630 |
| 01585300 | 788 | 982 | 1250 | 2070 | 2740 | 3750 | 4630 | 5620 | 6740 | 8450 |

| Station Number | Q1.25 (cfs) | Q1.50 (cfs) | Q2 (cfs) | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q200 (cfs) | Q500 (cfs) |
|----------------|-------------|-------------|----------|----------|-----------|-----------|-----------|------------|------------|------------|
| 01585400 | 188 | 237 | 316 | 633 | 984 | 1680 | 2450 | 3530 | 5030 | 7930 |
| 01585500 | 117 | 166 | 243 | 538 | 836 | 1370 | 1900 | 2570 | 3410 | 4860 |
| 01586000 | 1520 | 1850 | 2360 | 4100 | 5750 | 8560 | 11300 | 14700 | 19000 | 26300 |
| 01586610 | 711 | 928 | 1240 | 2230 | 3070 | 4360 | 5510 | 6810 | 8310 | 10600 |
| 01587000 | 2270 | 2840 | 3660 | 6360 | 8770 | 12600 | 16300 | 20600 | 25700 | 34000 |
| 01587050 | 68 | 91 | 126 | 255 | 384 | 615 | 849 | 1150 | 1530 | 2200 |
| 01587500 | 1520 | 1990 | 2720 | 5510 | 8380 | 13600 | 19100 | 26200 | 35500 | 52100 |
| 01588000 | 332 | 463 | 674 | 1520 | 2440 | 4160 | 6000 | 8440 | 11700 | 17500 |
| 01589000 | 6120 | 7920 | 10500 | 18800 | 26000 | 37300 | 47400 | 59100 | 72700 | 93900 |
| 01589100 | 465 | 540 | 645 | 986 | 1280 | 1760 | 2190 | 2710 | 3320 | 4320 |
| 01589180 | 58 | 66 | 85 | 175 | 265 | 430 | 630 | 880 | 1200 | 1800 |
| 01589197 | 495 | 548 | 636 | 995 | 1380 | 2110 | 2900 | 3980 | 5440 | 8230 |
| 01589200 | 147 | 190 | 262 | 596 | 1020 | 1970 | 3160 | 5010 | 7850 | 14000 |
| 01589240 | 599 | 787 | 1080 | 2210 | 3400 | 5600 | 7910 | 11000 | 15000 | 22300 |
| 01589300 | 1310 | 1580 | 2000 | 3640 | 5360 | 8610 | 12100 | 16800 | 23200 | 35100 |
| 01589330 | 1260 | 1490 | 1830 | 2980 | 4040 | 5820 | 7540 | 9670 | 12300 | 16700 |
| 01589352 | 4730 | 5920 | 7580 | 12900 | 17400 | 24400 | 30700 | 38000 | 46500 | 59700 |
| 01589440 | 636 | 830 | 1150 | 2500 | 4080 | 7320 | 11100 | 16500 | 24200 | 39700 |
| 01589464 | 420 | 538 | 703 | 1200 | 1610 | 2210 | 2730 | 3310 | 3950 | 4910 |
| 01591000 | 768 | 1050 | 1510 | 3310 | 5230 | 8840 | 12700 | 17700 | 24400 | 36500 |
| 01591400 | 669 | 846 | 1100 | 1960 | 2720 | 3960 | 5110 | 6490 | 8140 | 10800 |
| 01591700 | 652 | 895 | 1260 | 2530 | 3700 | 5610 | 7390 | 9510 | 12000 | 16000 |
| 01593350 | 94 | 130 | 185 | 382 | 572 | 896 | 1210 | 1600 | 2070 | 2850 |
| 01594000 | 2090 | 2660 | 3500 | 6370 | 9000 | 13400 | 17500 | 22500 | 28600 | 38600 |
| 01594930 | 253 | 308 | 381 | 581 | 729 | 934 | 1100 | 1270 | 1460 | 1730 |
| 01594936 | 69 | 92 | 127 | 258 | 389 | 624 | 861 | 1170 | 1550 | 2230 |
| 01594950 | 76 | 98 | 130 | 242 | 345 | 517 | 681 | 880 | 1120 | 1530 |
| 01596005 | 20 | 39 | 50 | 82 | 107 | 144 | 177 | 212 | 252 | 312 |
| 01596500 | 1060 | 1250 | 1520 | 2380 | 3100 | 4220 | 5240 | 6420 | 7800 | 10000 |
| 01597000 | 305 | 378 | 485 | 844 | 1170 | 1720 | 2230 | 2860 | 3630 | 4900 |
| 01598000 | 2180 | 2710 | 3450 | 5880 | 8030 | 11500 | 14600 | 18400 | 22900 | 30100 |
| 01599000 | 1270 | 1520 | 1880 | 2970 | 3890 | 5310 | 6580 | 8040 | 9730 | 12400 |
| 01601500 | 4140 | 4900 | 6040 | 10100 | 14000 | 20900 | 27800 | 36600 | 47800 | 67500 |
| 01609000 | 2490 | 3120 | 3970 | 6510 | 8540 | 11500 | 14000 | 16800 | 19900 | 24500 |
| 01609500 | 190 | 223 | 267 | 398 | 502 | 657 | 789 | 938 | 1110 | 1360 |
| 01610105 | 41 | 46 | 54 | 74 | 88 | 107 | 121 | 137 | 153 | 176 |
| 01610150 | 219 | 283 | 375 | 666 | 912 | 1290 | 1620 | 2000 | 2440 | 3110 |
| 01610155 | 2180 | 2880 | 3860 | 6930 | 9460 | 13200 | 16400 | 20000 | 24100 | 30000 |
| 01612500 | 315 | 399 | 518 | 896 | 1220 | 1720 | 2160 | 2680 | 3280 | 4210 |

| Station Number | Q1.25 (cfs) | Q1.50 (cfs) | Q2 (cfs) | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q200 (cfs) | Q500 (cfs) |
|-----------------------|--------------------|--------------------|-----------------|-----------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|
| 01613150 | 155 | 189 | 236 | 376 | 489 | 656 | 800 | 960 | 1140 | 1410 |
| 01613160 | 60 | 74 | 94 | 151 | 197 | 263 | 319 | 380 | 448 | 550 |
| 01614500 | 5380 | 6340 | 7620 | 11400 | 14400 | 18700 | 22400 | 26600 | 31200 | 38200 |
| 01619000 | 986 | 1210 | 1540 | 2570 | 3460 | 4880 | 6160 | 7670 | 9450 | 12300 |
| 01619475 | 11 | 15 | 21 | 44 | 68 | 109 | 152 | 207 | 276 | 398 |
| 01619500 | 1580 | 2020 | 2620 | 4520 | 6100 | 8520 | 10600 | 13100 | 15800 | 20100 |
| 01637000 | 268 | 387 | 584 | 1410 | 2320 | 4080 | 5980 | 8530 | 11900 | 18100 |
| 01637500 | 1470 | 1900 | 2510 | 4540 | 6320 | 9140 | 11700 | 14700 | 18300 | 23900 |
| 01637600 | 141 | 192 | 274 | 600 | 949 | 1610 | 2310 | 3240 | 4480 | 6730 |
| 01639000 | 6690 | 7580 | 8740 | 12000 | 14400 | 17800 | 20600 | 23600 | 26900 | 31700 |
| 01639140 | 1310 | 1550 | 1890 | 2940 | 3820 | 5180 | 6390 | 7800 | 9430 | 12000 |
| 01639500 | 2250 | 2700 | 3360 | 5560 | 7550 | 10900 | 14000 | 17800 | 22400 | 30100 |
| 01640000 | 228 | 306 | 424 | 857 | 1280 | 2020 | 2760 | 3680 | 4830 | 6800 |
| 01640500 | 179 | 255 | 378 | 876 | 1410 | 2420 | 3490 | 4910 | 6760 | 10100 |
| 01640700 | 102 | 136 | 190 | 396 | 609 | 1000 | 1410 | 1950 | 2670 | 3920 |
| 01640965 | 59 | 80 | 115 | 251 | 392 | 653 | 925 | 1280 | 1740 | 2570 |
| 01640970 | 146 | 213 | 325 | 796 | 1320 | 2340 | 3440 | 4920 | 6900 | 10500 |
| 01641000 | 482 | 624 | 821 | 1400 | 1860 | 2520 | 3060 | 3650 | 4300 | 5230 |
| 01641500 | 71 | 100 | 148 | 346 | 568 | 1000 | 1480 | 2130 | 3020 | 4670 |
| 01642000 | 13000 | 14800 | 16900 | 22600 | 26500 | 31700 | 35700 | 39900 | 44300 | 50400 |
| 01642400 | 232 | 314 | 440 | 891 | 1320 | 2070 | 2780 | 3670 | 4760 | 6580 |
| 01642500 | 1600 | 1960 | 2480 | 4150 | 5600 | 7920 | 10000 | 12600 | 15500 | 20300 |
| 01643000 | 13900 | 15900 | 18600 | 26600 | 33000 | 42400 | 50400 | 59300 | 69300 | 84500 |
| 01643395 | 46 | 68 | 105 | 266 | 449 | 811 | 1210 | 1750 | 2490 | 3850 |
| 01643500 | 1500 | 1900 | 2520 | 4780 | 7060 | 11200 | 15400 | 20900 | 28000 | 40600 |
| 01644371 | 87 | 106 | 134 | 241 | 347 | 538 | 734 | 990 | 1320 | 1920 |
| 01644375 | 93 | 128 | 184 | 411 | 660 | 1140 | 1660 | 2360 | 3310 | 5060 |
| 01644380 | 45 | 88 | 175 | 530 | 830 | 1320 | 1800 | 2300 | 2900 | 3850 |
| 01644420 | 53 | 70 | 97 | 189 | 275 | 419 | 557 | 725 | 928 | 1260 |
| 01644600 | 1720 | 2100 | 2600 | 4400 | 5900 | 8400 | 10800 | 13600 | 17400 | 23100 |
| 01645000 | 2340 | 3010 | 4050 | 7980 | 12000 | 19400 | 27100 | 37300 | 50500 | 74400 |
| 01645200 | 341 | 454 | 622 | 1210 | 1760 | 2680 | 3560 | 4620 | 5910 | 8040 |
| 01646550 | 492 | 657 | 887 | 1570 | 2110 | 2860 | 3480 | 4140 | 4850 | 5860 |
| 01647720 | 520 | 660 | 850 | 1700 | 2600 | 4350 | 7500 | 9200 | 13500 | 27000 |
| 01650050 | 313 | 368 | 470 | 910 | 1370 | 2250 | 3150 | 4250 | 5700 | 8300 |
| 01650085 | 40 | 53 | 79 | 200 | 351 | 681 | 1080 | 1680 | 2400 | 4000 |
| 01650190 | 94 | 128 | 181 | 380 | 582 | 945 | 1310 | 1790 | 2390 | 3440 |
| 01650500 | 829 | 1000 | 1280 | 2320 | 3400 | 5400 | 7530 | 10400 | 14200 | 21200 |
| 01651000 | 2580 | 3190 | 4050 | 6870 | 9350 | 13300 | 17000 | 21300 | 26400 | 34700 |

| Station Number | Q1.25 (cfs) | Q1.50 (cfs) | Q2 (cfs) | Q5 (cfs) | Q10 (cfs) | Q25 (cfs) | Q50 (cfs) | Q100 (cfs) | Q200 (cfs) | Q500 (cfs) |
|-----------------------|--------------------|--------------------|-----------------|-----------------|------------------|------------------|------------------|-------------------|-------------------|-------------------|
| 03075450 | 20 | 23 | 28 | 41 | 51 | 68 | 74 | 91 | 105 | 140 |
| 03075500 | 2910 | 3490 | 4280 | 6660 | 8580 | 11400 | 13900 | 16700 | 19800 | 24600 |
| 03075600 | 18 | 23 | 30 | 54 | 75 | 111 | 144 | 184 | 232 | 310 |
| 03076500 | 4570 | 5360 | 6350 | 8920 | 10700 | 13100 | 14900 | 16800 | 18700 | 21400 |
| 03076600 | 1150 | 1370 | 1640 | 2040 | 2340 | 3600 | 4800 | 5400 | 5800 | 6400 |
| 03077700 | 18 | 25 | 36 | 78 | 145 | 220 | 320 | 450 | 640 | 1000 |
| 03078000 | 1500 | 1730 | 2040 | 3000 | 3690 | 4780 | 5710 | 6750 | 7930 | 9720 |

Attachment 2. Watershed characteristics used in the regression analysis for the 96 gaging stations in the Piedmont-Blue Ridge Region

| Station number | Years of record | Drainage area (sq mi) | Limestone (percent) | Impervious area (percent) | Forest cover (percent) |
|-----------------------|------------------------|------------------------------|----------------------------|----------------------------------|-------------------------------|
| 01495000 | 80 | 53.36 | 0 | 2.5 | 35.4 |
| 01495500 | 12 | 26.46 | 0 | 2.5 | 30.9 |
| 01496000 | 37 | 24.87 | 0 | 1.9 | 22.8 |
| 01496080 | 10 | 1.75 | 0 | 1.5 | 94.3 |
| 01496200 | 27 | 9.00 | 0 | 1 | 14.8 |
| 01577940 | 16 | 0.67 | 0 | 1.6 | 28 |
| 01578500 | 19 | 191.66 | 0 | 1.9 | 33.6 |
| 01578800 | 10 | 1.25 | 0 | 2.5 | 15.3 |
| 01579000 | 22 | 5.08 | 0 | 2.9 | 18.9 |
| 01580000 | 86 | 94.31 | 0 | 1 | 35.8 |
| 01580200 | 11 | 127.16 | 0 | 1.2 | 34.7 |
| 01581500 | 38 | 8.79 | 0 | 12.9 | 22.3 |
| 01581700 | 45 | 34.64 | 0 | 8.1 | 27.1 |
| 01581752 | 11 | 2.47 | 0 | 42.9 | 5.2 |
| 01581810 | 12 | 27.46 | 2 | 4.9 | 25.7 |
| 01581870 | 13 | 15.76 | 0 | 7.8 | 19.8 |
| 01581940 | 10 | 0.77 | 0 | 2.5 | 74.1 |
| 01581960 | 13 | 9.66 | 0 | 4.8 | 35.4 |
| 01582000 | 69 | 53.70 | 0 | 1.3 | 41 |
| 01582510 | 14 | 1.39 | 0 | 2.4 | 31.2 |
| 01583100 | 23 | 12.45 | 0 | 3.4 | 31.2 |
| 01583495 | 10 | 0.23 | 0 | 0 | 27.5 |
| 01583500 | 68 | 60.31 | 0 | 1.5 | 34 |
| 01583580 | 26 | 1.49 | 0 | 8.4 | 64.5 |
| 01583979 | 11 | 2.10 | 0 | 40.2 | 12.7 |
| 01584050 | 37 | 9.31 | 0 | 5.7 | 18.5 |
| 01584500 | 72 | 36.04 | 0 | 3.5 | 28.2 |
| 01585090 | 18 | 2.58 | 0 | 44 | 11.7 |
| 01585095 | 17 | 1.36 | 0 | 42.9 | 5.6 |
| 01585100 | 40 | 7.56 | 0 | 37.7 | 18.6 |
| 01585104 | 13 | 2.44 | 0 | 22.5 | 28.6 |
| 01585200 | 46 | 2.31 | 0 | 42.1 | 4.1 |
| 01585225 | 16 | 0.14 | 0 | 41.1 | 0.5 |
| 01585230 | 16 | 3.50 | 0 | 45.4 | 1.8 |
| 01585300 | 29 | 4.52 | 0 | 25.3 | 29.9 |
| 01585400 | 29 | 1.94 | 0 | 36.8 | 21.4 |

| Station number | Years of record | Drainage area (sq mi) | Limestone (percent) | Impervious area (percent) | Forest cover (percent) |
|-----------------------|------------------------|------------------------------|----------------------------|----------------------------------|-------------------------------|
| 01585500 | 64 | 3.26 | 0 | 4.2 | 19.5 |
| 01586000 | 67 | 55.48 | 3.1 | 5.4 | 23 |
| 01586610 | 30 | 28.01 | 0.1 | 4.9 | 31.7 |
| 01587000 | 24 | 164.23 | 1.74 | 4.6 | 31.5 |
| 01587050 | 11 | 0.49 | 0 | 10 | 5.9 |
| 01587500 | 32 | 64.26 | 0 | 4 | 31.4 |
| 01588000 | 43 | 11.40 | 0 | 4.6 | 20.5 |
| 01589000 | 23 | 284.71 | 0 | 4.7 | 33.3 |
| 01589100 | 47 | 2.47 | 0 | 33.8 | 24.5 |
| 01589180 | 14 | 0.31 | 0 | 42 | 15.8 |
| 01589197 | 14 | 4.09 | 0 | 37.7 | 11.8 |
| 01589200 | 17 | 4.89 | 0 | 14.6 | 26.5 |
| 01589240 | 12 | 19.27 | 0 | 16.6 | 35.1 |
| 01589300 | 34 | 32.59 | 0 | 19.5 | 30.7 |
| 01589330 | 31 | 5.52 | 0 | 41.1 | 8.4 |
| 01589352 | 14 | 63.57 | 0 | 41.3 | 16.5 |
| 01589440 | 47 | 25.21 | 0 | 11.4 | 35.9 |
| 01589464 | 9 | 2.26 | 0 | 41.7 | 1.4 |
| 01591000 | 68 | 34.95 | 0 | 1.4 | 33.3 |
| 01591400 | 46 | 22.86 | 0 | 4.3 | 25.3 |
| 01591700 | 34 | 27.31 | 0 | 8.9 | 32.7 |
| 01593350 | 11 | 1.06 | 0 | 34.8 | 5.4 |
| 01594000 | 59 | 98.25 | 0 | 11 | 28.6 |
| 01614500 | 85 | 502.44 | 41.5 | 1.6 | 32.6 |
| 01619000 | 27 | 93.90 | 64.6 | 3.9 | 56.9 |
| 01619475 | 11 | 0.11 | 81.72 | 0 | 9.7 |
| 01619500 | 85 | 280.89 | 75.6 | 4.8 | 24.8 |
| 01637000 | 30 | 8.76 | 0 | 0.8 | 54.8 |
| 01637500 | 65 | 67.33 | 0 | 0.8 | 46.6 |
| 01637600 | 11 | 2.32 | 0 | 1.5 | 37.6 |
| 01639000 | 72 | 172.7 | 1.3 | 0.8 | 13.1 |
| 01639140 | 12 | 31.07 | 2.4 | 3.7 | 13.6 |
| 01639500 | 65 | 102.98 | 1.1 | 1.8 | 22 |
| 01640000 | 31 | 8.11 | 76.53 | 6.9 | 19.5 |
| 01640500 | 53 | 6.10 | 0 | 0.5 | 80.8 |
| 01640700 | 11 | 1.12 | 0 | 0 | 4.7 |
| 01640965 | 13 | 2.19 | 0 | 0 | 96 |
| 01640970 | 10 | 3.91 | 0 | 1.2 | 76.7 |

| Station number | Years of record | Drainage area (sq mi) | Limestone (percent) | Impervious area (percent) | Forest cover (percent) |
|-----------------------|------------------------|------------------------------|----------------------------|----------------------------------|-------------------------------|
| 01641000 | 43 | 18.69 | 16.23 | 1.8 | 77.3 |
| 01641500 | 39 | 7.30 | 0 | 0 | 100 |
| 01642000 | 35 | 665.1 | 14.14 | 1.7 | 28 |
| 01642400 | 10 | 2.67 | 0 | 0.1 | 6.8 |
| 01642500 | 49 | 82.37 | 0 | 1.3 | 26.4 |
| 01643000 | 84 | 816.45 | 12.3 | 2.4 | 27 |
| 01643395 | 9 | 1.18 | 0 | 1.5 | 86.4 |
| 01643500 | 62 | 62.94 | 0 | 2 | 38.3 |
| 01644371 | 9 | 0.42 | 0 | 28 | 23.5 |
| 01644375 | 9 | 1.29 | 0 | 53.5 | 8.6 |
| 01644380 | 9 | 0.81 | 0 | 1.5 | 42.5 |
| 01644420 | 10 | 0.28 | 0 | 0 | 15.2 |
| 01644600 | 12 | 53.89 | 0 | 23.1 | 27.2 |
| 01645000 | 48 | 102.19 | 0 | 11.6 | 27.2 |
| 01645200 | 30 | 3.70 | 0 | 26.2 | 13.6 |
| 01646550 | 40 | 4.09 | 0 | 32.4 | 5.2 |
| 01647720 | 11 | 9.68 | 0 | 9.9 | 23.2 |
| 01650050 | 10 | 2.51 | 0 | 5.1 | 33.6 |
| 01650085 | 10 | 0.35 | 0 | 3.8 | 66.2 |
| 01650190 | 10 | 0.49 | 0 | 5.4 | 4.4 |
| 01650500 | 75 | 21.23 | 0 | 11.6 | 26.3 |
| 01651000 | 47 | 49.43 | 0 | 25.1 | 19.7 |

Attachment 3. Watershed characteristics used in the regression analysis for the 24 gaging stations in the Appalachian Plateau Region

| Station Number | Years of Record | Drainage area (sq mi) | Land Slope (ft/ft) |
|-----------------------|------------------------|------------------------------|---------------------------|
| 01594930 | 26 | 8.23 | 0.155 |
| 01594936 | 28 | 1.91 | 0.144 |
| 01594950 | 25 | 2.36 | 0.130 |
| 01596005 | 14 | 1.43 | 0.099 |
| 01596500 | 64 | 48.53 | 0.203 |
| 01597000 | 33 | 16.75 | 0.194 |
| 01598000 | 24 | 115.87 | 0.227 |
| 01599000 | 82 | 72.74 | 0.164 |
| 01601500 | 83 | 247.03 | 0.209 |
| 01609000 | 33 | 149.45 | 0.202 |
| 01609500 | 25 | 5.00 | 0.166 |
| 01610105 | 15 | 0.65 | 0.160 |
| 01610150 | 18 | 10.27 | 0.115 |
| 01610155 | 24 | 102.71 | 0.184 |
| 01612500 | 17 | 17.28 | 0.143 |
| 01613150 | 22 | 4.60 | 0.113 |
| 01613160 | 12 | 1.24 | 0.129 |
| 03075450 | 12 | 0.55 | 0.066 |
| 03075500 | 72 | 134.16 | 0.115 |
| 03075600 | 22 | 0.52 | 0.071 |
| 03076500 | 89 | 294.14 | 0.112 |
| 03076600 | 48 | 49.07 | 0.168 |
| 03077700 | 12 | 1.07 | 0.085 |
| 03078000 | 65 | 63.77 | 0.101 |

Attachment 4. Computation of the Equivalent Years of Record for Regression Equations for the Piedmont-Blue Ridge Region and the Appalachian Plateau Region in Maryland

Computational Procedure

The variance (standard error squared (SE^2)) of the x-year flood at a gaging station is estimated as

$$SE_x^2 = (S^2/N) * R_x^2 \quad (A1)$$

where S is the standard deviation of the logarithms (log units) of the annual peak discharges at the gaging station, N is the actual record length in years and R_x is a function of recurrence interval x and skew (G) at the gaging station. The standard error increases as the recurrence interval increases, given the same record length.

In Equation A1, the standard error of the x-year flood at a gaging station is inversely related to record length N and directly related to the variability of annual peak flows represented by S (standard deviation) and G (skew). If the standard error of the x-year flood is interchanged with the standard error of estimate (SE) of the regression equation, then Equation A1 can be used to estimate the years of record needed to obtain that standard error of estimate. Rearranging Equation A1 and solving for N gives Equation A2 below.

The equivalent years of record of the regression estimate is defined as the number of years of actual streamflow record required at a site to achieve an accuracy equivalent to the standard error of the regional regression equation. The equivalent years of record (N_r) of a regression equation is computed as follows (Hardison, 1971):

$$N_r = (S/SE)^2 * R^2 \quad (A2)$$

where S is an estimate of the standard deviation of the logarithms of the annual peak discharges at the ungaged site, SE is the standard error of estimate of the regional regression estimates in logarithmic units, and R^2 is a function of recurrence interval and skew and is computed as (Stedinger and others, 1993):

$$R^2 = 1 + G * K_x + 0.5 * (1 + 0.75 * G^2) * K_x^2 \quad (A3)$$

where G is an estimate of the average skew for a given hydrologic region, and K_x is the Pearson Type III frequency factor for the x-year flood and skew G.

Computational Details

The equivalent years of record are estimated for the regional regression equations and computations in Equations A2 and A3 require an estimate of the average standard deviation and average skew for all gaging stations in a given region. For the Piedmont-Blue Ridge Region, the average standard deviation (S) is 0.3070 log units and the average skew (G) is 0.48. For the Appalachian Plateau Region, the average standard deviation (S) is 0.2353 log units and the average skew (G) is 0.39. The lower standard deviation and skew in the Appalachian Plateau Region is indicative of less variability in the annual peak flows in this region.

For the Piedmont-Blue Ridge Region, the pertinent data are $S=0.3070$ log units and $G=0.48$ and:

| Recurrence Interval (years) | K value | SE ² (log units squared) | Equivalent years of record |
|--------------------------------|----------|-------------------------------------|----------------------------|
| 1.25 | -0.85624 | 0.03378 | 2.8 |
| 1.50 | | | (3.2) Estimated |
| 2 | -0.07972 | 0.02488 | 3.7 |
| 5 | 0.80991 | 0.01825 | 9.2 |
| 10 | 1.32181 | 0.01583 | 16 |
| 25 | 1.90425 | 0.01525 | 25 |
| 50 | 2.30094 | 0.01602 | 31 |
| 100 | 2.67165 | 0.01816 | 34 |
| 200 | 3.02262 | 0.02266 | 32 |
| 500 | 3.46270 | 0.03063 | 30 |

The equivalent years of record are estimated using Equations A2 and A3 using the above data.

For the Appalachian Plateau Region, the pertinent data are $S=0.2353$ log units and $G=0.39$ and:

| Recurrence Interval (years) | K value | SE ² (log units squared) | Equivalent years of record |
|--------------------------------|----------|-------------------------------------|----------------------------|
| 1.25 | -0.85500 | 0.01723 | 1.2 |
| 1.50 | | | (3.7) Estimated |
| 2 | -0.06485 | 0.00825 | 6.6 |
| 5 | 0.81712 | 0.00826 | 11 |
| 10 | 1.31597 | 0.01099 | 12 |
| 25 | 1.87730 | 0.01420 | 14 |
| 50 | 2.25628 | 0.01893 | 14 |
| 100 | 2.60827 | 0.02431 | 13 |
| 200 | 2.93974 | 0.03150 | 12 |
| 500 | 3.35346 | 0.04188 | 11 |

APPENDIX 4
REGRESSION EQUATIONS FOR THE
ESTIMATION OF BANKFULL
CROSS-SECTION AREA, DEPTH
AND WIDTH AS FUNCTIONS OF
UPSTREAM DRAINAGE AREA

Background

One method of estimating the time of concentration of a watershed is to estimate the travel time through the hydraulic flow path. An estimation of the time required for a particle of water to travel through the channel network is one element in the hydraulic flow path approach. This channel travel time is usually estimated by computing the velocity with the Manning equation under bankfull conditions.

Often, it is not feasible to send a crew into the field to make the measurements needed to define the bankfull depth, width and area. When field surveys are not practical, the Panel recommends use of the regression equations that estimate the bankfull depth, area and width as a function of the upstream drainage area. The US Fish and Wildlife Service (FWS) and the Maryland State Highway Administration, in cooperation with the US Geological Survey, developed the three sets of equations presented in this appendix.

A4-1. The FWS Equations

A4-1.1 Equations for Piedmont Hydrologic Region

Reference: McCandless, Tamara L., and Everett, Richard A., *Maryland Stream Survey: Bankfull Discharge and Channel Characteristics of Streams in the Piedmont Hydrologic Region*, US Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S02-01, 2002

Measurements were made at 23 sites having drainage areas between 1.47 sq. mi. and 102.00 sq. mi. The equations are:

$$\begin{aligned}\text{Cross-sectional Area} &= 17.42 \text{ DA}^{0.73} \\ \text{Width} &= 14.78 \text{ DA}^{0.39} \\ \text{Depth} &= 1.18 \text{ DA}^{0.34}\end{aligned}$$

where DA is the upstream drainage area in square miles. Figure A4-1 [from McCandless and Everett (2002)] illustrates the quality of the agreements.

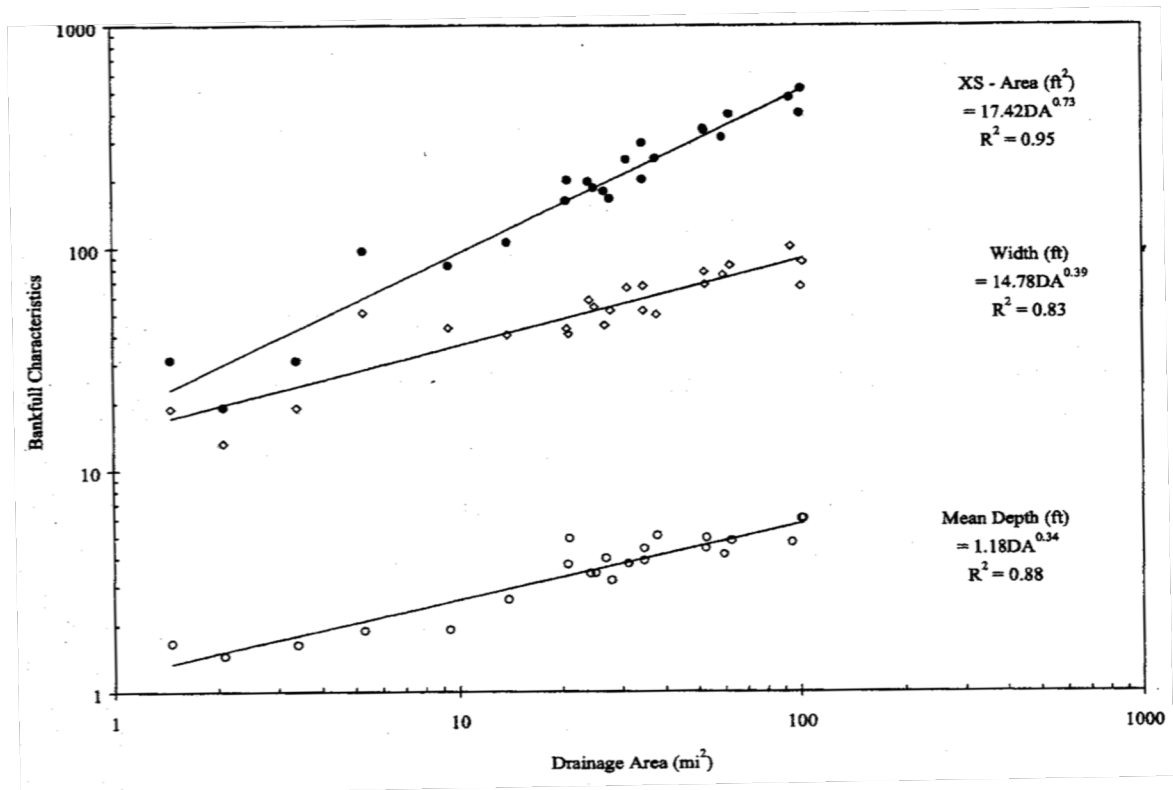


Figure A4-1: Bankfull channel dimensions as a function of drainage area for Maryland Piedmont survey sites (n = 23). (From McCandless and Everett, 2002).

A4-1.2 Equations for Allegheny Plateau and the Valley and Ridge Hydrologic Regions

Reference: McCandless, Tamara L., *Maryland Stream Survey: Bankfull Discharge and Channel Characteristics of Streams in the Allegheny Plateau and Valley and Ridge Hydrologic Region*, US Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S03-01, 2003

Measurements were made at 14 sites having drainage areas between 0.2 sq. mi. and 73.1 sq. mi. The equations are:

$$\begin{aligned} \text{Cross-sectional Area} &= 13.17 \text{ DA}^{0.75} \\ \text{Width} &= 13.87 \text{ DA}^{0.44} \\ \text{Depth} &= 0.95 \text{ DA}^{0.31} \end{aligned}$$

where DA is the upstream drainage area in square miles. Figure A4-2 [from McCandless (2003)] illustrates the quality of the agreements.

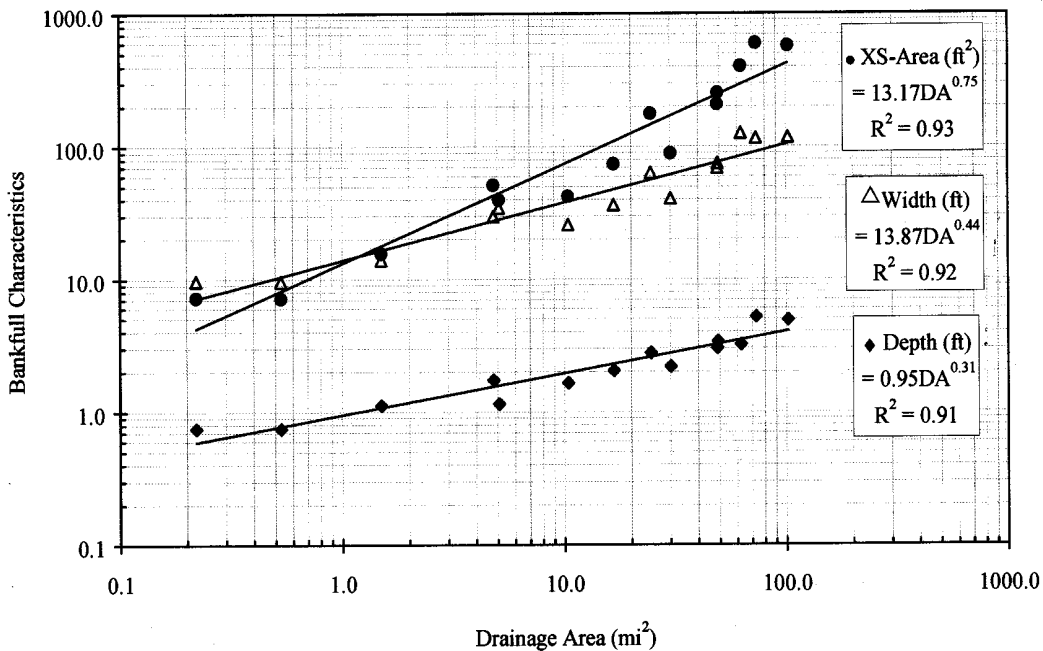


Figure A4-2: Bankfull channel dimensions as a function of drainage area for Appalachian Plateau / Valley & Ridge survey sites (n = 14) [from McCandless (2003)].

A4-1.3 Equations for the Coastal Plain Hydrologic Region

Reference: McCandless, Tamara L., *Maryland Stream Survey: Bankfull Discharge and Channel Characteristics of Streams in the Coastal Plain Hydrologic Region*, US Fish and Wildlife Service, Chesapeake Bay Field Office, CBFO-S03-02, 2003

Measurements were made at 14 sites having drainage areas between 0.3 sq. mi. and 113 sq. mi. The equations are:

$$\begin{aligned}\text{Cross-sectional Area} &= 10.34 \text{ DA}^{0.70} \\ \text{Width} &= 10.30 \text{ DA}^{0.38} \\ \text{Depth} &= 1.01 \text{ DA}^{0.32}\end{aligned}$$

where DA is the upstream drainage area in square miles. Figure A4-3 [from McCandless (2003)] illustrates the quality of the agreements.

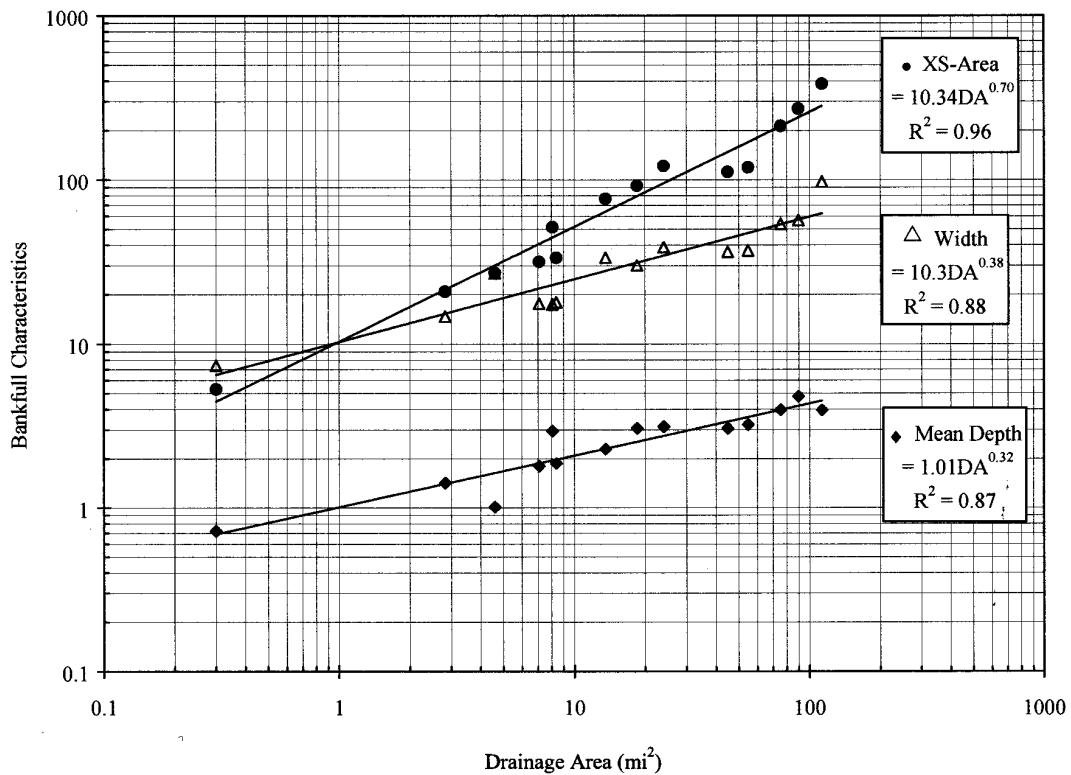


Figure A4-3: Bankfull channel dimensions as a function of drainage area for Coastal Plain survey sites (n = 14) [from McCandless (2003)].

A4-2 Manual Use of the FWS Equations

A4-2.1 Determining the Time of Concentration

The engineer will need to identify the channel portion of the longest flow path. The engineer should then determine the drainage area at the upstream and downstream extremes of the flow path. We will denote these areas as DA_u and DA_d , respectively. The geometric mean of these two values is determined as:

$$\overline{DA} = \exp\left[\frac{\ln(DA_u) + \ln(DA_d)}{2}\right] \quad (\text{A4-1})$$

The geometric mean of the upstream and downstream drainage areas is then substituted into the FWS channel geometry equations to determine a bankfull width and depth for this mean drainage area. The width and depth are then combined with the channel roughness and slope to determine a bankfull velocity. The channel length of the longest flow path is then divided by the bankfull velocity to determine the travel time associated with the channel portion of the time of concentration.

Example: Determine the channel portion of travel time for a 2000 foot long channel with a slope of 0.0015 ft/ft in the Maryland Piedmont physiographic province. The drainage area at the upstream end of the channel is 5.0 square miles. At the downstream end, the drainage area is 10.0 square miles. Use a channel roughness, $n=0.05$.

Solution: First, determine the geometric mean drainage area:

$$\overline{DA} = \exp\left[\frac{\ln(5) + \ln(10)}{2}\right] = 7.07 \text{ mi}^2$$

Using this value, the bankfull channel width and depth in the Piedmont are calculated:

$$w = 14.78(7.07)^{0.39} = 31.69 \text{ feet}$$

$$d = 1.18(7.07)^{0.34} = 2.29 \text{ feet}$$

Now use Manning's equation to determine the bankfull velocity, assuming a rectangular cross section:

$$v = \frac{1.49}{0.05} \left[\frac{31.69 \cdot 2.29}{2(2.29) + 31.69} \right]^{2/3} (0.0015)^{1/2} = 1.83 \text{ ft/s}$$

The channel portion of the travel time is then:

$$t_{channel} = \frac{l}{v} = \frac{2000}{1.83} = 1093 \text{ sec} = 18.2 \text{ minutes}$$

This travel time would be added to the overland and swale portions of the travel time along the longest flow path to determine the overall t_c value.

A4-2.2 Determining the Rating Curve for Reach Routing

As in the case of determining the time of concentration, t_c , the engineer will need to know the upstream and downstream drainage areas for the reach being studied. The engineer will additionally need the reach slope, roughness values for in-bank and out-of-bank flow, and cross-section geometry for the out-of-bank portion of the flow, presumably determined from a topographic map. As in the t_c calculations, the engineer must determine the geometric mean drainage area and use this to determine the bankfull channel geometry – idealizing the channel as a rectangular section with bankfull width and depth determined from the FWS equations for the appropriate region using the geometric mean drainage area. (Note: Alternatively, the engineer may choose to simply use the drainage area from the location of the selected cross-section to determine the bankfull width and depth from the FWS equations.) This channel portion of the cross-section is then superimposed on the cross-section from the topographic map with the channel cross-section replacing the topographic map measurements at the lowest observed elevation from the topographic map. That is, the topographic map is assumed to indicate only the top-of-bank elevation, so the rectangular cross-section is “carved” into the cross-section such that the channel incises a depth, d , into the topographically-derived cross-section.

Once this cross-section is determined, the engineer need only choose an appropriate set of stages over which to apply Manning’s equation to determine channel velocity and ultimately discharge. For each selected stage, the derived discharge and cross-sectional area (“End Area”) should be recorded.

A4-3. Using the FWS Equations within GISHydro2000

The FWS channel geometry equations have an influence on two different elements of the TR-20 input file: the time of concentration calculation and the rating curve for reach routing. Additionally, the way these equations are to be used will likely differ depending on whether GISHydro2000 is being used to generate the TR-20 input file, or whether the input file is being developed manually.

A4-3.1 Time of Concentration

GISHydro2000 allows for the calculation of the time of concentration, t_c , using three different methods: the SCS lag equation, the Hydrology Panel equation, and the velocity method. The velocity method is the recommended method for t_c calculation. The time of concentration dialog box is shown below.

The dialog box is titled "Time of Concentration Calculation". It contains the following sections and controls:

- Select Method:** Three radio buttons: "SCS Lag Formula", "Hydrology Panel Tc Method", and "Velocity Method Tc Calculation" (selected).
- Sheet Flow:** Input fields for "ns" (0.1), "P [in]" (3.2), and "L [ft]" (100).
- Shallow Flow:** Two radio buttons: "Paved" and "Unpaved" (selected).
- Channel Flow:** Two radio buttons: "Use NHD Streams" (selected) and "Use Inferred Streams". A "Source Area [mi2]" field contains 0.0896752.
- Channel Width:** "Coef." field (14.78) and "Exp." field (0.39).
- Channel Depth:** "Coef." field (1.18) and "Exp." field (0.34).
- Channel Area:** "Coef." field (17.42) and "Exp." field (0.73).
- Apply To:** Two radio buttons: "ALL Sub-Areas" (selected) and "ONLY Selected Sub-Areas".
- Buttons:** "Cancel", "Set", and "Close" at the bottom.

If the user selects the velocity method then the “Channel Flow” portion of the dialog directly reflects how the FWS equations’ influence the t_c calculation. GISHydro2000 detects the physiographic province(s) in which the watershed is located and performs an area-weighted calculation to determine the coefficients and exponents of the width, depth, and cross-sectional area channel geometry equations. (The coefficients shown in the illustrated dialog box correspond to the Piedmont province.) Once all parameters have been set, GISHydro2000 proceeds in the calculation of velocity on a pixel-by-pixel basis all along the longest flow path. The channel portion of the longest flow path is indicated by either the minimum source area (the inferred streams option) or by the upstream extent of the 1:100,000 NHD (National Hydrography Dataset) produced by the USGS. Normal depth at bankfull conditions is assumed; thus, the local slope, channel roughness, and

channel geometry may be used in Manning’s equation to determine a velocity. Note that the channel geometry changes slightly on a pixel-by-pixel basis because the drainage area increases in a known way along the flow path. The local drainage area is used to determine the local channel bankfull width, depth, and area. The GIS determines the incremental flow length associated with each pixel and divides this incremental length by the local flow velocity to give an incremental travel time. Incremental travel times for all pixels along the longest flow path are summed to calculate the total travel time. The image below shows a small portion of the calculations along a longest flow path within the Piedmont region. The reader should note that the user does not need to specify the location of the longest flow path; it is determined internally by the GIS.

| Value | Count | Type | Mixed | Da | Slope | Width | Depth | Xarea | L_length | Tot_length | Vel | L_time | Tot_time |
|-------|-------|---------|-------|------|--------|-------|-------|-------|----------|------------|------|--------|----------|
| 85 | 1 | swale | No | 2175 | 0.0100 | -1.00 | -1.00 | -1.00 | 141.4 | 9577 | 1.60 | 0.025 | 1.502 |
| 86 | 1 | swale | No | 2185 | 0.0200 | -1.00 | -1.00 | -1.00 | 141.4 | 9718 | 2.26 | 0.017 | 1.519 |
| 87 | 1 | swale | No | 2193 | 0.0200 | -1.00 | -1.00 | -1.00 | 100.0 | 9818 | 2.26 | 0.012 | 1.531 |
| 88 | 1 | swale | No | 2196 | 0.0071 | -1.00 | -1.00 | -1.00 | 100.0 | 9918 | 1.35 | 0.021 | 1.552 |
| 89 | 1 | swale | No | 2197 | 0.0200 | -1.00 | -1.00 | -1.00 | 100.0 | 10018 | 2.26 | 0.012 | 1.564 |
| 90 | 1 | swale | No | 2198 | 0.0071 | -1.00 | -1.00 | -1.00 | 141.4 | 10160 | 1.35 | 0.029 | 1.594 |
| 91 | 1 | channel | No | 7475 | 0.0071 | 21.71 | 1.65 | 35.79 | 141.4 | 10301 | 3.18 | 0.012 | 1.606 |
| 92 | 1 | channel | No | 7657 | 0.0200 | 21.92 | 1.66 | 36.42 | 100.0 | 10401 | 5.38 | 0.005 | 1.611 |
| 93 | 1 | channel | No | 7682 | 0.0071 | 21.95 | 1.67 | 36.51 | 141.4 | 10543 | 3.20 | 0.012 | 1.623 |
| 94 | 1 | channel | No | 7699 | 0.0400 | 21.96 | 1.67 | 36.57 | 141.4 | 10684 | 7.62 | 0.005 | 1.628 |
| 95 | 1 | channel | No | 7710 | 0.0400 | 21.98 | 1.67 | 36.61 | 141.4 | 10825 | 7.62 | 0.005 | 1.634 |
| 96 | 1 | channel | No | 7722 | 0.0300 | 21.99 | 1.67 | 36.65 | 100.0 | 10925 | 6.60 | 0.004 | 1.638 |
| 97 | 1 | channel | No | 7738 | 0.0071 | 22.01 | 1.67 | 36.70 | 141.4 | 11067 | 3.21 | 0.012 | 1.650 |
| 98 | 1 | channel | No | 7790 | 0.0071 | 22.07 | 1.67 | 36.88 | 141.4 | 11208 | 3.21 | 0.012 | 1.662 |

A4.3-2 Determining the Rating Curve for Reach Routing

GISHydro2000 uses the FWS equation to develop the rating curve for each routing reach within the watershed. The user indicates the location of the cross-section within the GISHydro2000 interface by drawing a line perpendicular to the flow path at a representative location along the routing reach. A cross-section editor dialog box appears as shown below. The GIS automatically determines the drainage area at the location of the cross-section. This area is used with the region-appropriate FWS equations to infer the in-bank portion of the channel geometry. The out-of-bank portion of the geometry is determined directly from the DEM. By combining the in-bank and out-of-bank portions of the cross-section and applying Manning’s equation with the normal depth assumption at various depths spanning the likely range of flow conditions, GISHydro2000 generates a stage-discharge-end area table which is used directly as input to TR-20

Blank page inserted to preserve left-right pagination format.

**APPENDIX 5
EXAMPLE OF CALIBRATION
OF WinTR-20 TO THE
REGIONAL REGRESSION EQUATION**

OVERVIEW

This example illustrates how an existing land use condition WinTR-20 model and calibration window are created and how the model may be adjusted to that window.

The regression equations are developed from USGS gage data that represent land use conditions during the period of gage records. The calibrated WinTR-20 model uses existing land use and hydrograph timing that approximates the watershed characteristics reflected in the regional equations. The calibrated WinTR-20 model is then used to create a model for ultimate development of the watershed which is suitable for deriving design flows.

GISHydro is the primary tool used in this example. The GISHydro database contains all the watershed characteristics that are required to create a WinTR-20 model for existing conditions. It is used to develop WinTR-20 input parameters, calculate peak flows from the regression equations, and predict the calibration confidence limits from statistical standard errors.

PROJECT DESCRIPTION

Design flows for ultimate development of the watershed are required for the replacement of a State Highway bridge No. 1006200 on MD Rte 140 in Frederick, Maryland. The study, report and computed discharges will be submitted to Maryland Department of Environment (MDE) for their review and approval as part of obtaining a waterway construction permit for the project.

Bridge No. 1006200 was built in 1932 and needs to be replaced due to its age and structural condition. The structure carries MD 140, Main Street, over Flat Run in Emmitsburg, Frederick County, Maryland (Figure A5-1).

MD 140 is classified as a Rural Minor Arterial by the Maryland Functional Classification System and the design storm for this roadway is the 50-year (2% occurrence) event. The hydrology study will develop discharges for the 2-, 10-, 25-, 50- and 100-year storm events. The study focuses on calibrating discharges to the 50-year and 100-year storm events since the 50-year is the design storm and the 100-year is the base flood used to analyze floodplain impacts.

Watershed Description

The 10.8 square mile watershed lies entirely in the Blue Ridge Region but is contained in both Maryland and Pennsylvania. The watershed is characterized by mostly cropland with some urban and forested land use. There are no stream gages in the watershed.

Study Description

The design flows are based on a WinTR-20 hydrology model using ultimate development with the land use to be derived from zoning maps. This example develops and calibrates the existing condition WinTR-20 model to be within the Piedmont-Blue Ridge Region Regression Equation estimate and the upper 67 percent confidence limit.

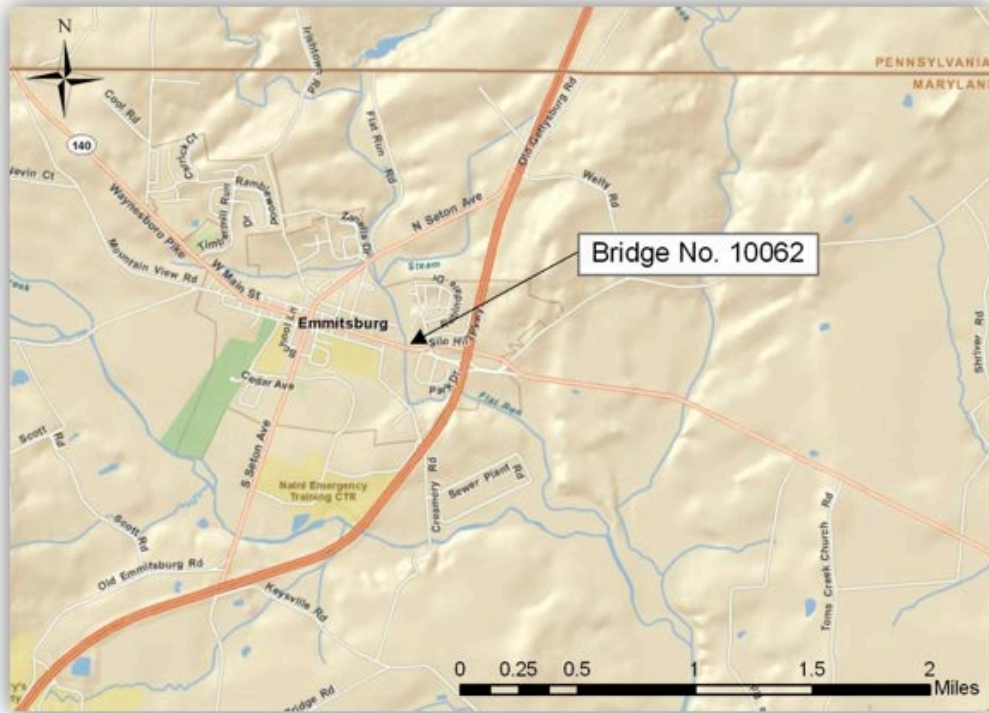


Figure A5-1
Location of the MD 140 bridge site over Flat Run in Emmitsburg, Frederick County, MD

Step 1 – Watershed Delineation and Model Structure

The first task is to delineate the watershed and develop the structure of the model (i.e. main stem, tributary reaches, and sub areas). GISHydro is used to delineate the watershed (Figure A5-2). SSURGO soils and the NLUD 2001 land use databases are used in this analysis. The Maryland Office of Planning 2002 land use data cannot be used for this analysis because the drainage area extends outside of the Maryland boundary. The NLUD 2001 data is checked to ensure it

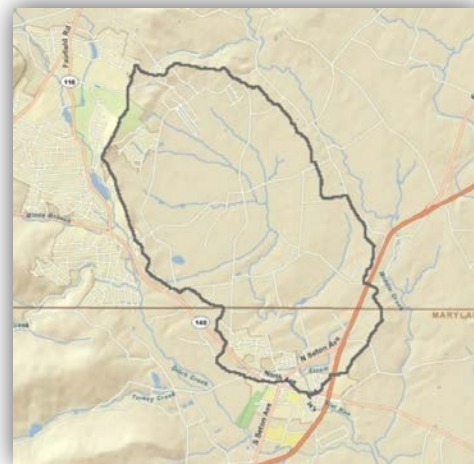


Figure A5-2
Flat Run watershed delineation

adequately represents existing land use. The NLUD data are developed from satellite imagery and can sometimes overestimate the amount of tree cover.

Select the outlet to delineate the drainage area and then compute the basin statistics. The structure of the watershed model is now considered. This particular watershed has a semi-elongated shape and is comprised of one main stem which forms in the upper third of the watershed from three contributing tributaries. There are no structures on the main stem which would provide significant storage such as dams or railroad crossings. Design discharges are only needed at the bridge location at the watershed outlet. For these reasons, a single area watershed structure is first considered.

The NLUD 2001 land use data are checked using aerial photos. Several locations are visually investigated and appear to adequately represent the land use. Figure A5-3 shows the land use categories made semi-transparent with the aerial photography shown underneath. The aqua blue color represents land use Value 22, low intensity residential. The limits appear to be reasonable.

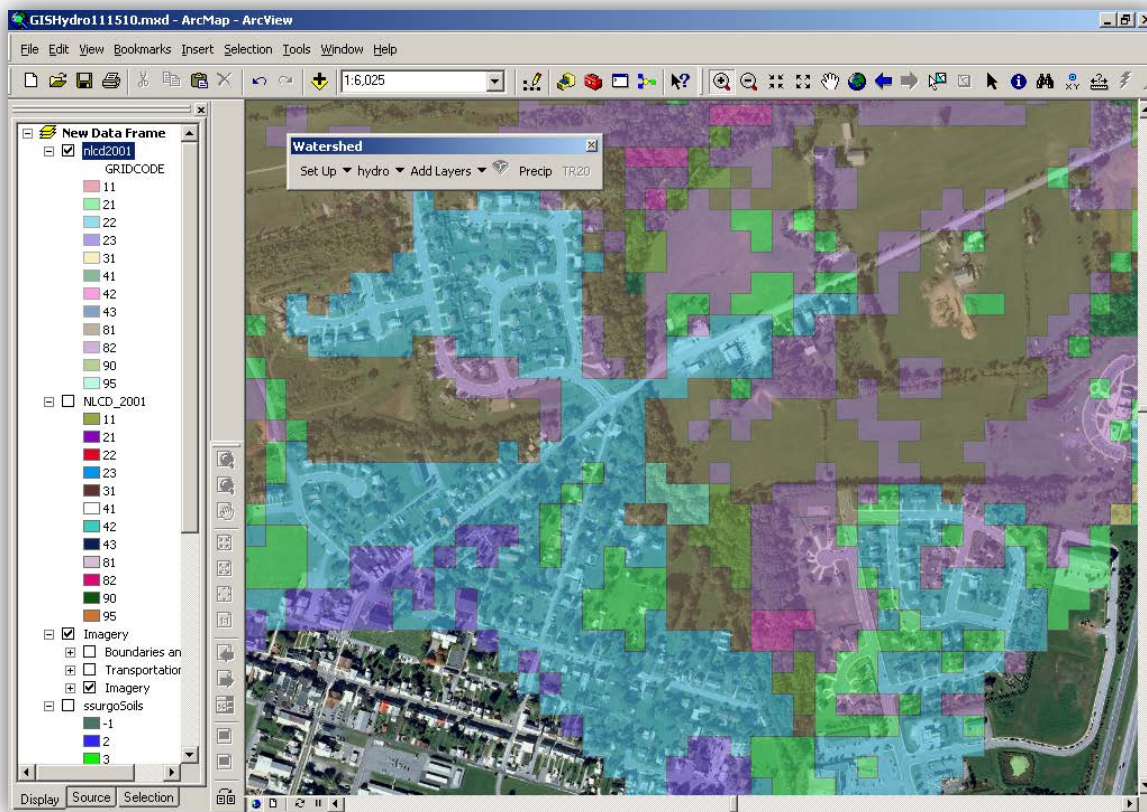


Figure A5-3: Distribution of land use data from the NLUD 2001 database

Step 2 – Compute the Fixed Region Regression Equations and Tasker Limits

Use GISHydro to compute the flood discharges and confidence limits for each frequency using the Piedmont-Blue Ridge Region Regression Equations. Figure A5-4 shows the single basin watershed, the main stem, and its tributaries from GISHydro.

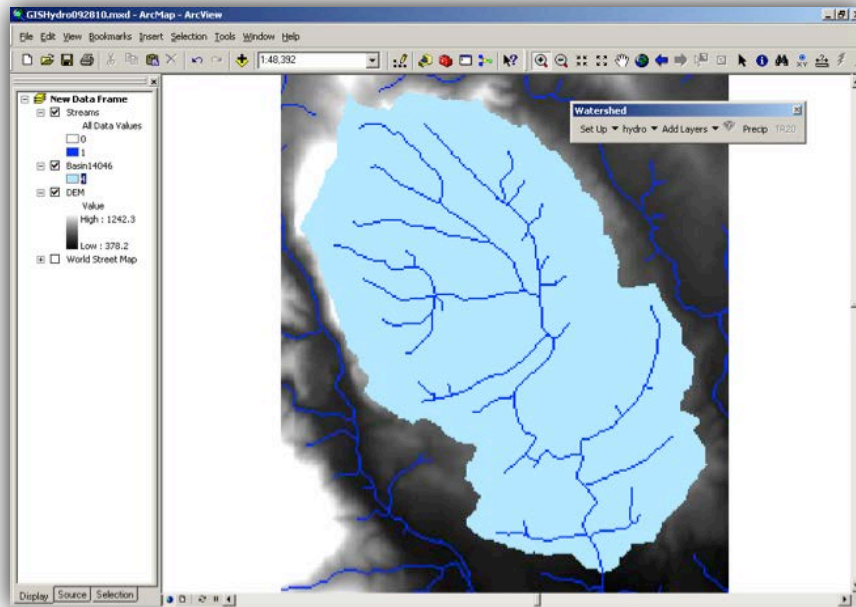


Figure A5-4: Flat Run watershed upstream of MD 140 in Frederick County, MD

Step 3 – Calculate the Time of Concentration

The time of concentration is calculated manually using the TR-55 velocity method approach after estimating the location of the longest hydraulic flow path. The total time of concentration is the sum of sheet, shallow concentrated and channel flow segments.

Sheet Flow

From the most hydraulically distant point, determine the length and slope of the flow lines. The elevation values are developed from the digital elevation model (DEM) included with GISHydro.

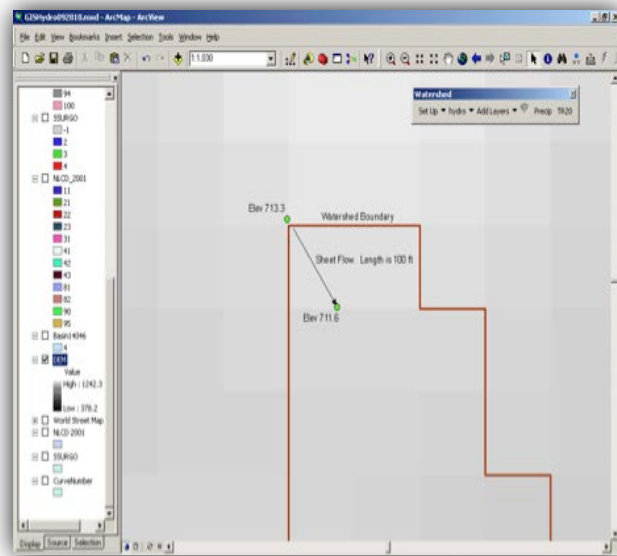


Figure A5-5: Flow lines for sheet flow

The surface cover for the sheet flow is determined from the aerial photograph, which shows residential grass and light tree cover. The layer file shown can be viewed using adding GIS data from online services through the following link:

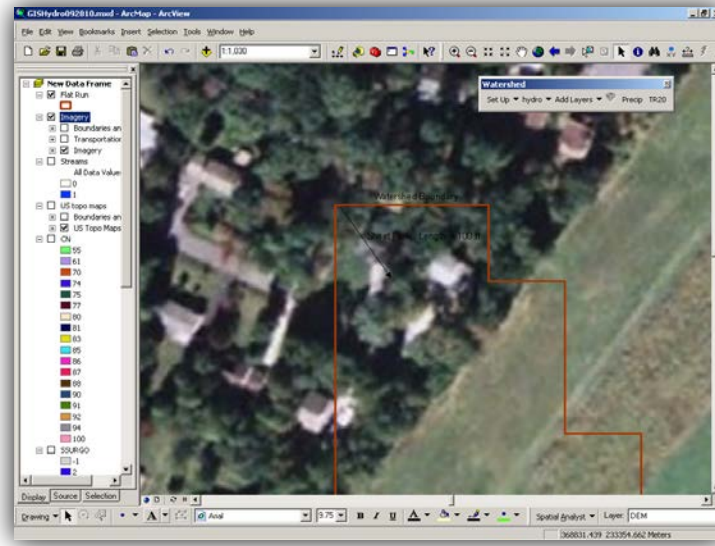


Figure A5-6: Aerial photograph showing the sheet flow reach

<http://www.arcgis.com/home/item.html?id=a5fef63517cd4a099b437e55713d3d54>.

Computation of the Sheet Flow travel time is shown in Calculation Sheet A5-A.

Shallow Concentrated Flow

Obtain the slope and distance from the end of the sheet flow to the beginning of the channel as shown in Figure A5-7. Determine whether this is paved or unpaved. The beginning of the channel for this example appears to be a pond. This is field verified and checked.

The seamless USGS Quad map layer can be viewed using adding GIS data from online services through the following link:

<http://www.arcgis.com/home/item.html?id=9608ff2e65224ef29c7337f47108b8a5>.

Computation of the Shallow Concentrated Flow travel time is given in Calculation Sheet A5-A.

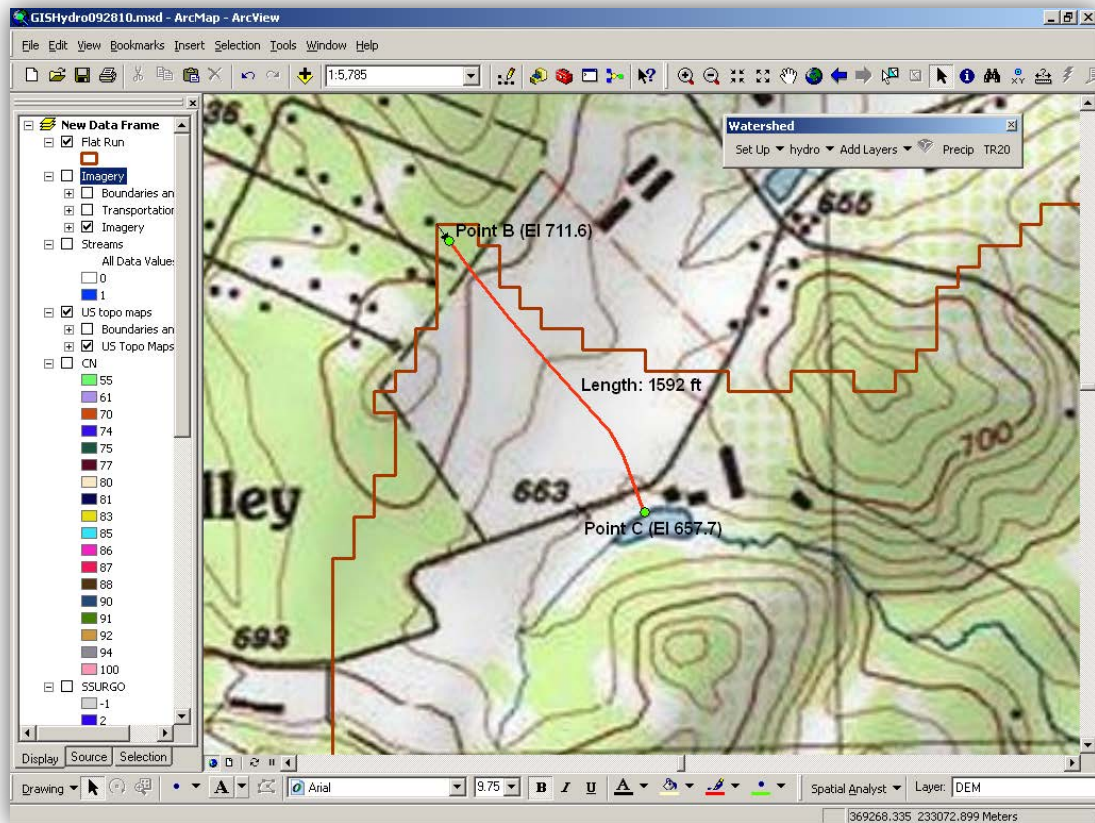


Figure A5-7: Location of the shallow concentrated flow reach

Channel Flow

The channel flow segment is broken into two reaches because of the difference in drainage areas and the enlargement of the channel between these reaches. The channel is significantly larger and deeper between Points D and E than between Points C and D (Figure A5-8). The U.S. Fish & Wildlife Service (USFWS) Report *Maryland Stream Survey: Bankfull Discharge and Channel Characteristics of Streams in the Alleghany Plateau and the Valley and Ridge Hydrologic Regions*, CBFO-S03-01, dated May 2003, is used to estimate the channel dimensions for this project. These equations can be found in Appendix 4 of the Hydrology Panel report. Two cross-sections are needed: between Points C and D and between Points D and E. The sections are located close to the midpoint of each reach. Their locations are shown in Figure A5-8. GISHydro is used to delineate the contributing area to the mid-point of each reach. The drainage area contributing to Reach C-D is 0.9 square miles and to Reach D-E is 7.4 square miles. Figure 13 of the USFWS report is used to estimate channel characteristics which are reported in the attached spreadsheet. The travel times used to calculate the Channel Flow time of concentration are also reported in calculation sheet A5-A.

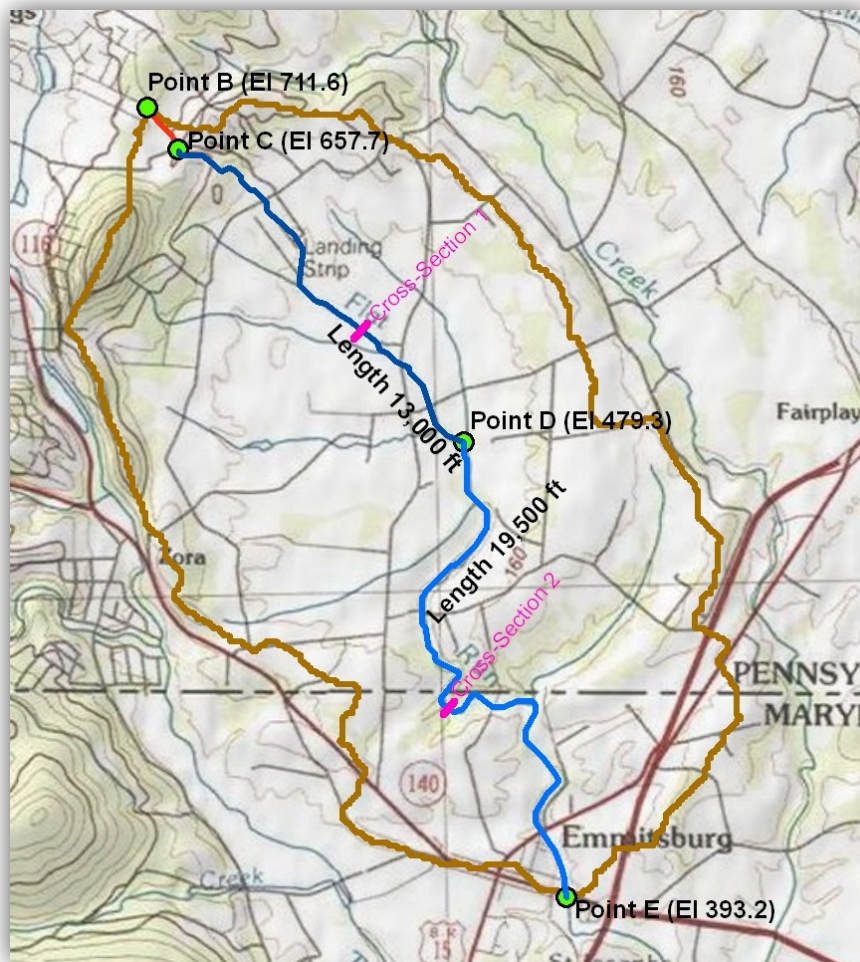


Figure A5-8: Location of channel reaches for determining the channel flow travel times

One of the values requiring the most judgment in estimating the time of concentration is the selection of the Manning's roughness coefficient. In this calculation, the roughness coefficient must account for all losses including minor losses such as changes in channel cross-section, local obstructions and gradient changes. The value should be larger than what may be appropriate for a straight uniform channel. The recommended 0.045 and 0.04 base values are used for this example.

Using these base values a total time of concentration was computed as 3.06 hours. This value should be compared to the regression estimate from the equation in Appendix 6 and the SCS Lag Equation estimate which are reported in the basin statistics file. These values are 5.1 hours and 4.5 hours, respectively. The time of concentration based on traveltimes may be underestimated based on this comparison.

| Time of Concentration | | | | | |
|---------------------------|---|-------------------|-----------|-------|-----------|
| Project: | MD 140 over Flat Run | By: | L.M. Bass | Date: | 14-Dec-15 |
| Location: | Frederick County | Checked: | J. Minnow | Date: | 15-Dec-15 |
| Notes: | Undivided Watershed. Calculation for uncalibrated WinTR-20 model | | | | |
| Sheet Flow | | | | | |
| | Segment I.D. | A-B | | | |
| 1. | Surface Description (see table)..... | Grass/light woods | | | |
| 2. | Manning's roughness coefficient (see table)..... | 0.3 | | | |
| 3. | Flow length, L (total L < 300 ft)..... ft | 100 | | | |
| 4. | Two year 24-hr rainfall, P ₂ in | 3.15 | | | |
| 5. | Land slope, s..... ft/ft | 0.017 | | | |
| 6. | $T_{sf} = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ compute hrs | 0.31 | | | 0.31 |
| Shallow Concentrated Flow | | | | | |
| | Segment I.D. | B-C | | | |
| 7. | Surface Description (Paved or Unpaved) | Unpaved | | | |
| 8. | Flow Length, L..... ft | 1590 | | | |
| 9. | Land slope, s..... ft/ft | 0.034 | | | |
| 10. | Average velocity, V..... ft/sec | 3.0 | | | |
| 11. | $T_{sc} = \frac{L}{3600 V}$ computehr. | 0.15 | | | 0.15 |
| Channel Flow | | | | | |
| | Segment I.D. | C-D | D-E | | |
| 12. | Watershed area, a.....mi ² | 0.9 | 7.4 | | |
| 13. | Cross section flow area.....ft ² | 12.2 | 59.1 | | |
| 14. | Width..... ft | 13.2 | 33.5 | | |
| 15. | Depth..... ft | 0.9 | 1.8 | | |
| 16. | Wetted perimeter, P _w ft | 15.1 | 37.0 | | |
| 17. | Hydraulic radius $r = \frac{a}{P_w}$ft | 0.8 | 1.6 | | |
| 17. | Channel slope, s..... ft/ft | 0.0125 | 0.004 | | |
| 18. | Manning's roughness coefficient, n..... | 0.045 | 0.04 | | |
| 17. | $v = \frac{1.49 r^{0.67} s^{0.5}}{n}$ mpute ... ft/sec | 3.2 | 3.2 | | |
| 18. | Flow length, L..... ft | 12200 | 18000 | | |
| 19. | $T_{cf} = \frac{L}{3600 V}$:ompute..... hr | 1.06 | 1.55 | | 2.61 |
| 20. | Watershed or Subarea Tc (add T _{sf} + T _{sc} + T _{cf}) Hr | | | | 3.06 |

Calculation Sheet A5-A (uncalibrated model)
Time of concentration computation using TR-55 method

Step 4 – Determine the Rainfall Data and Build the WinTR-20 Model

Use GISHydro to develop the rainfall depths for various storm duration and frequencies. The values for this example are shown in Figure A5-9. GISHydro develops these data from the NOAA Atlas 14 publication.

GISHydro builds the WinTR-20 model for each storm event. The time of concentration value is the one derived by the TR-55 velocity method shown above.

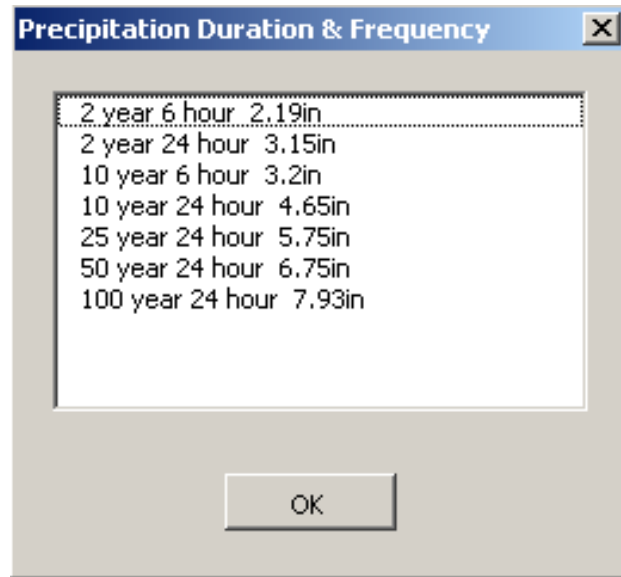


Figure A5-9: Rainfall depths from NOAA Atlas 14

Step 5 – Run WinTR-20

Open WinTR-20 and open the input file created by GISHydro. Save the file and run to compute discharges.

Step 6 – Evaluate Results

Figure A5-10 shows the results of the uncalibrated WinTR-20 model as compared to the regression equation and upper 67-percent Tasker Limit.

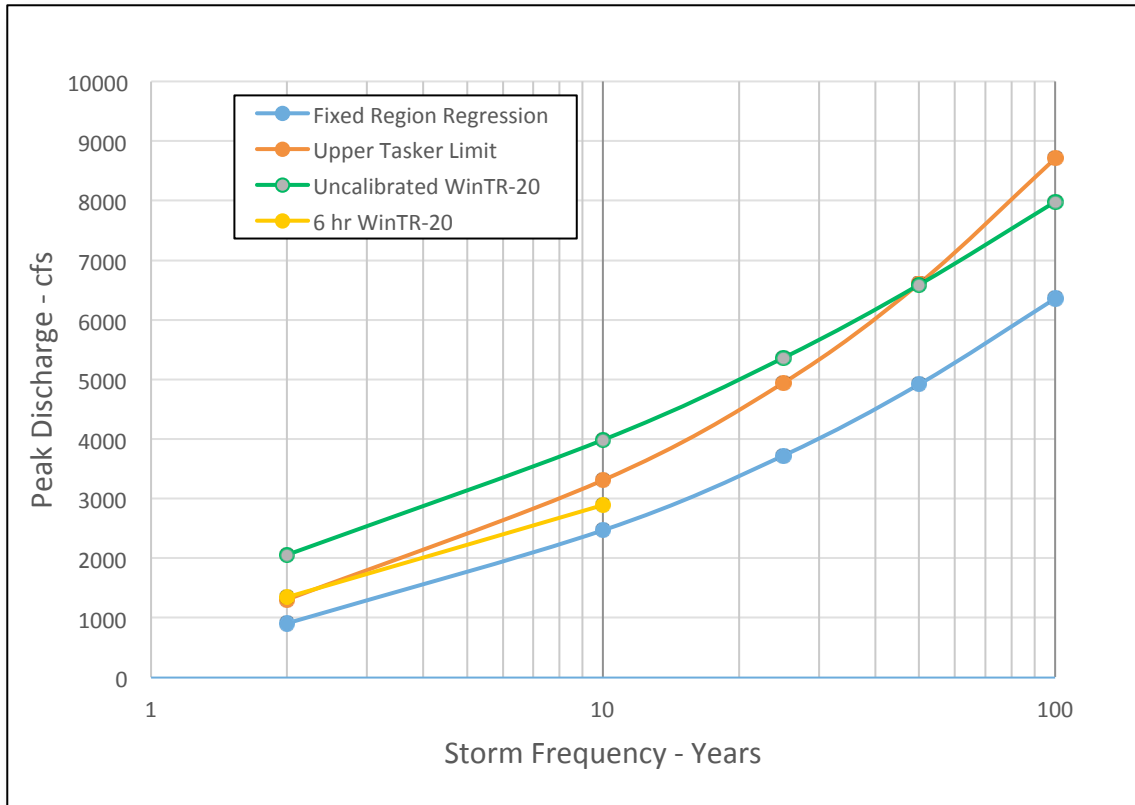


Figure A5-10: Comparison of WinTR-20 flood discharges without calibration to the Fixed Region regression estimates

**Table A5-B
Flood Discharge Estimates for Each Return Period**

| Return Period | Discharge | | | |
|---------------|------------------|------------------------|-------------------------------|-----------------------------|
| | Fixed Region Eqn | Upper 67% Tasker Limit | WinTR-20 (24 hr, Tc=3.06 hrs) | WinTR-20 (6 hr, Tc=3.06hrs) |
| 2 | 903 | 1300 | 2055 | 1344 |
| 10 | 2470 | 3310 | 3987 | 2895 |
| 25 | 3720 | 4940 | 5360 | --- |
| 50 | 4920 | 6610 | 6591 | --- |
| 100 | 6360 | 8710 | 7983 | --- |

Figure A5-10 and Table A5-B for the uncalibrated WinTR-20 model show that the 2-year through the 25-year storm events are above the Fixed Region Regression Equation upper 67-percent Tasker limit. The 6-hour storm event flows for the 2-year is also above the 67-percent confidence limit while the 6-hour, 10-year value falls within the Tasker limits. It is appropriate to use the 6-hour storm duration for the 2-year and 10-year events since the time of concentration is less than 6 hours.

These results suggest that the WinTR-20 model should be calibrated. A separate reason to calibrate is that the computed time of concentration calculated is shorter than both

predictions from the Lag Equation and the regression equation in Appendix 6. A longer time of concentration would also affect all flows thereby decreasing the peak flows for all return periods.

Calibration Adjustment

One common and reasonable adjustment is to investigate the reach lengths. Figure A5-11 shows the computed reach length on top of an aerial photo with the stream thalweg shown in red. This depiction shows that digitizing a blue line from the 24,000 scale USGS Quad map effectively shortens the true reach length. A five percent (5%) increase in the reach lengths for the channel flow portion is appropriate and should be done to more accurately reflect the true lengths. The channel n factors were raised by 0.005 and 0.01 points (approximately 25%). The time of concentration is recalculated on sheet A5-C as 3.72 hours. This time of concentration is more in line with the values estimated by the Lag time and the regression equation in Appendix 6.



Figure A5-11: Comparison of computed reach length (blue) to the stream thalweg (red)

| Time of Concentration | | | | | |
|---------------------------|---|-------------------|-----------|-------|-----------|
| Project: | MD 140 over Flat Run | By: | L.M. Bass | Date: | 14-Dec-15 |
| Location: | Frederick County | Checked: | J. Minnow | Date: | 15-Dec-15 |
| Notes: | rshed. Calculation for calibrated WinTR-20 model - increase channel n factors and chann | | | | |
| Sheet Flow | | | | | |
| | Segment I.D. | A-B | | | |
| 1. | Surface Description (see table)..... | Grass/light woods | | | |
| 2. | Manning's roughness coefficient (see table)..... | 0.3 | | | |
| 3. | Flow length, L (total L < 300 ft)..... ft | 100 | | | |
| 4. | Two year 24-hr rainfall, P ₂ in | 3.15 | | | |
| 5. | Land slope, s ft/ft | 0.017 | | | |
| 6. | $T_{sf} = \frac{0.007 (nL)^{0.8}}{P_2^{0.5} s^{0.4}}$ compute hrs | 0.31 | | | 0.31 |
| Shallow Concentrated Flow | | | | | |
| | Segment I.D. | B-C | | | |
| 7. | Surface Description (Paved or Unpaved) | Unpaved | | | |
| 8. | Flow Length, L ft | 1590 | | | |
| 9. | Land slope, s ft/ft | 0.034 | | | |
| 10. | Average velocity, V ft/sec | 3.0 | | | |
| 11. | $T_{sc} = \frac{L}{3600 V}$ computehr. | 0.15 | | | 0.15 |
| Channel Flow | | | | | |
| | Segment I.D. | C-D | D-E | | |
| 12. | Watershed area, ami ² | 0.9 | 7.4 | | |
| 13. | Cross section flow areaft ² | 12.2 | 59.1 | | |
| 14. | Width ft | 13.2 | 33.5 | | |
| 15. | Depth ft | 0.9 | 1.8 | | |
| 16. | Wetted perimeter, P _w ft | 15.1 | 37.0 | | |
| 17. | Hydraulic radius $r = \frac{a}{P_w}$ft | 0.8 | 1.6 | | |
| 17. | Channel slope, s ft/ft | 0.0125 | 0.004 | | |
| 18. | Manning's roughness coefficient, n | 0.05 | 0.05 | | |
| 17. | $v = \frac{1.49 r^{0.67} s^{0.5}}{n}$ mpute ... ft/sec | 2.9 | 2.6 | | |
| 18. | Flow length, L ft | 12810 | 18900 | | |
| 19. | $T_{cf} = \frac{L}{3600 V}$:ompute..... hr | 1.23 | 2.04 | | 3.27 |
| 20. | Watershed or Subarea Tc (add T _{sf} + T _{sc} + T _{cf}) Hr | | | | 3.72 |

Calculation Sheet A5-C (Calibrated Model)

Time of Concentration with 5% increase in reach lengths and higher n factors

The 2-year and 10-year storm events, computed using 3.72 hours for the time of concentration and the 6-hour storm duration both fall within the calibration window (Table A5-D). The larger storm events are computed using the 24-hour storm duration and lie within the calibration window.

Table A5-D

| Return Period | Discharge | | | |
|---------------|------------------|------------------------|----------------------------------|--------------------------------|
| | Fixed Region Eqn | Upper 67% Tasker Limit | WinTR-20 (24 hr, Tc=3.72 hrs) | WinTR-20 (6 hr, Tc=3.72hrs) |
| 2 | 903 | 1300 | 1766 | 1167 |
| 10 | 2470 | 3310 | 3419 | 2482 |
| 25 | 3720 | 4940 | 4635 | --- |
| 50 | 4920 | 6610 | 5708 | --- |
| 100 | 6360 | 8710 | 6933 | --- |

The final calibrated existing condition WinTR-20 model will be reported using the adjusted time of concentration value of 3.72 hours and the 6-hour storm duration for the 2- and 10-year storms and the 24-hour storm duration for the 25-, 50- and 100-year storm events. The results are shown in Figure A5-12 and Table A5-E. All storms fall within the calibration limits.

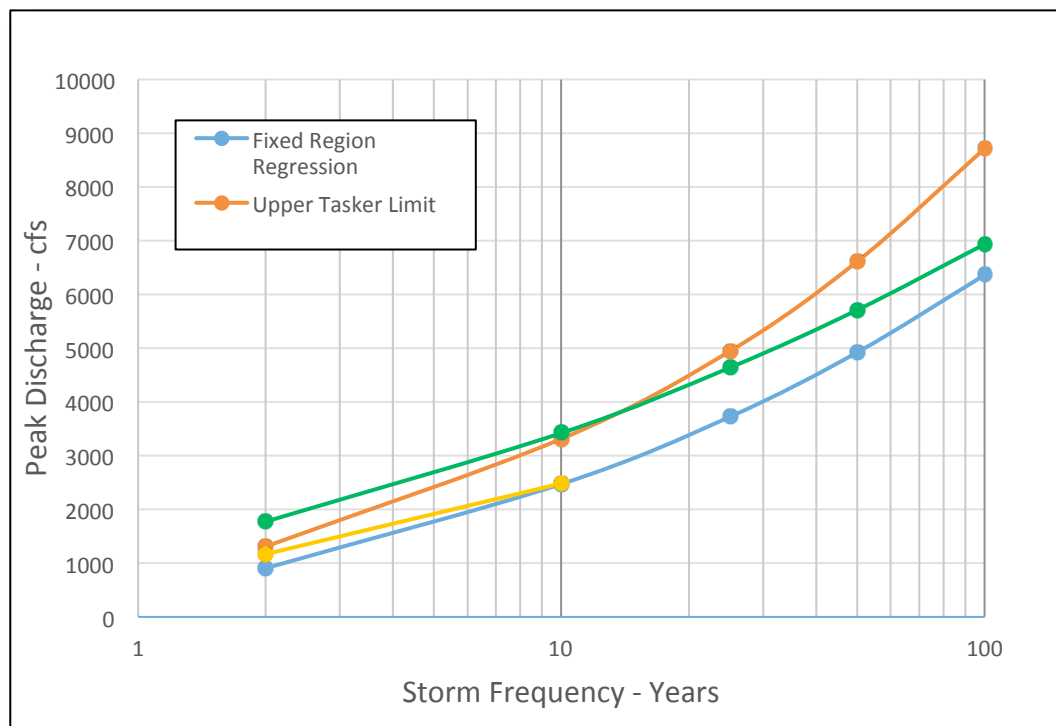


Figure A5-12: Final calibrated WinTR-20 flood discharges compared to the Fixed Region regression estimates

Table A5-E
Calibrated WinTR-20 model (6- and 24-hour storm durations)

| Return Period | Discharge | | |
|------------------|------------------|------------------------|------------------------|
| | Fixed Region Eqn | Upper 67% Tasker Limit | WinTR-20 (Tc=3.72 hrs) |
| 2 | 903 | 1300 | 1167 |
| 10 | 2470 | 3310 | 2482 |
| 25 | 3720 | 4940 | 4635 |
| 50 | 4920 | 6610 | 5708 |
| 100 | 6360 | 8710 | 6933 |

Step 7 – Create the Ultimate Condition WinTR-20 Model

The final step to complete a study is to modify the calibrated existing condition WinTR-20 model to reflect the ultimate development condition. This example illustrates how to calibrate an existing condition WinTR-20 model. Chapter 4 of the Hydrology Panel report provides instructions on how to perform this final step.

GISHydro Basin Statistics

| |
|---|
| <p>Hydro Extension Version Date: June 30, 2015 Analysis Data:7/6/2015</p> <p>Data Selected: DEM Coverage: DEMTOT Land Use Coverage: NLUUD_2001 Soil Coverage: SSURGO Hydrologic Condition</p> <p>Outlet Easting: 372642(MD Stateplane, NAD 1983) Outlet Nothing: 226076(MD Stateplane, NAD 1983)</p> <p>Findings: Region(s)Blue Ridge and Great Valley Drainage Area: 10.80square miles Channel Slope: 29.0431ft/mile Land Slope: 0.0466ft/ft Longest Flow Path: 7.12mi BasinRelief: 129.19ft Time of Concentration: 4.46hr [from SCS Lag Equation * 1.67 Time of Concentration: 5.1hr [W.O. Thomas, Jr. Equation] Average CN: 79.87 %Impervious 1.49% %Forest Cover 21.00% %Limestone.00% %Storage0.00% %A Soils: 0.00</p> |
|---|

Thomas Discharges and Confidence (Tasker) Limits

| Flood frequency estimates for MD 140 over Flat Run | | | | |
|---|-----------------|--|----------------------------|-------------------------------------|
| REGION: Blue Ridge & Piedmont | | | | |
| area= 10.80:time = 0.00:forest = 21.00 :Impervious Area= 1.49 :skew= 0.48 | | | | |
| Return Period | Discharge (cfs) | Standard Error of Prediction (percent) | Equivalent Years of Record | Standard Error of Prediction (logs) |
| 1.25 | 507. | 44.9 | 2.89 | 0.1862 |
| 1.50 | 666. | 41.5 | 2.97 | 0.1730 |
| 2.00 | 903. | 38.1 | 3.71 | 0.1598 |
| 5.00 | 1720. | 32.3 | 9.30 | 0.1368 |
| 10.00 | 2470. | 30.0 | 16.06 | 0.1275 |
| 25.00 | 3720. | 29.0 | 26.08 | 0.1233 |
| 50.00 | 4920. | 30.2 | 31.13 | 0.1282 |
| 100.00 | 6360. | 32.2 | 34.15 | 0.1365 |
| 200.00 | 8850. | 35.9 | 32.28 | 0.1512 |
| 500.00 | 12100. | 42.2 | 29.70 | 0.1757 |

| Return Period | P R E D I C T I O N I N T E R V A L S | | | | | | | |
|---------------|---------------------------------------|--------|------------|--------|------------|--------|------------|--------|
| | 50 PERCENT | | 67 PERCENT | | 90 PERCENT | | 95 PERCENT | |
| | lower | upper | lower | upper | lower | upper | lower | upper |
| 1.25 | 380. | 675. | 330. | 778. | 251. | 1020. | 219. | 1170. |
| 1.50 | 510. | 870. | 447. | 992. | 347. | 1280. | 305. | 1450. |
| 2.00 | 705. | 1150. | 625. | 1300. | 494. | 1650. | 439. | 1860. |
| 5.00 | 1390. | 2120. | 1250. | 2350. | 1020. | 2880. | 925. | 3180. |
| 10.00 | 2030. | 3010. | 1840. | 3310. | 1530. | 4000. | 1390. | 4390. |
| 25.00 | 3080. | 4500. | 2800. | 4940. | 2330. | 5930. | 2130. | 6490. |
| 50.00 | 4040. | 5990. | 3660. | 6610. | 3030. | 7980. | 2760. | 8770. |
| 100.00 | 5160. | 7850. | 4650. | 8710. | 3800. | 10700. | 3440. | 11800. |
| 200.00 | 7010. | 11200. | 6250. | 12500. | 5000. | 15700. | 4470. | 17500. |
| 500.00 | 9210. | 15800. | 8060. | 18100. | 6220. | 23500. | 5470. | 26700. |


WinTR-20 Model Development Process

NOTE


This example uses an earlier version of WinTR20.

The current version can be downloaded from the USDA website:


<http://www.nrcs.usda.gov/wps/portal/nrcs/detailfull/null/?cid=stelprdb1042793>

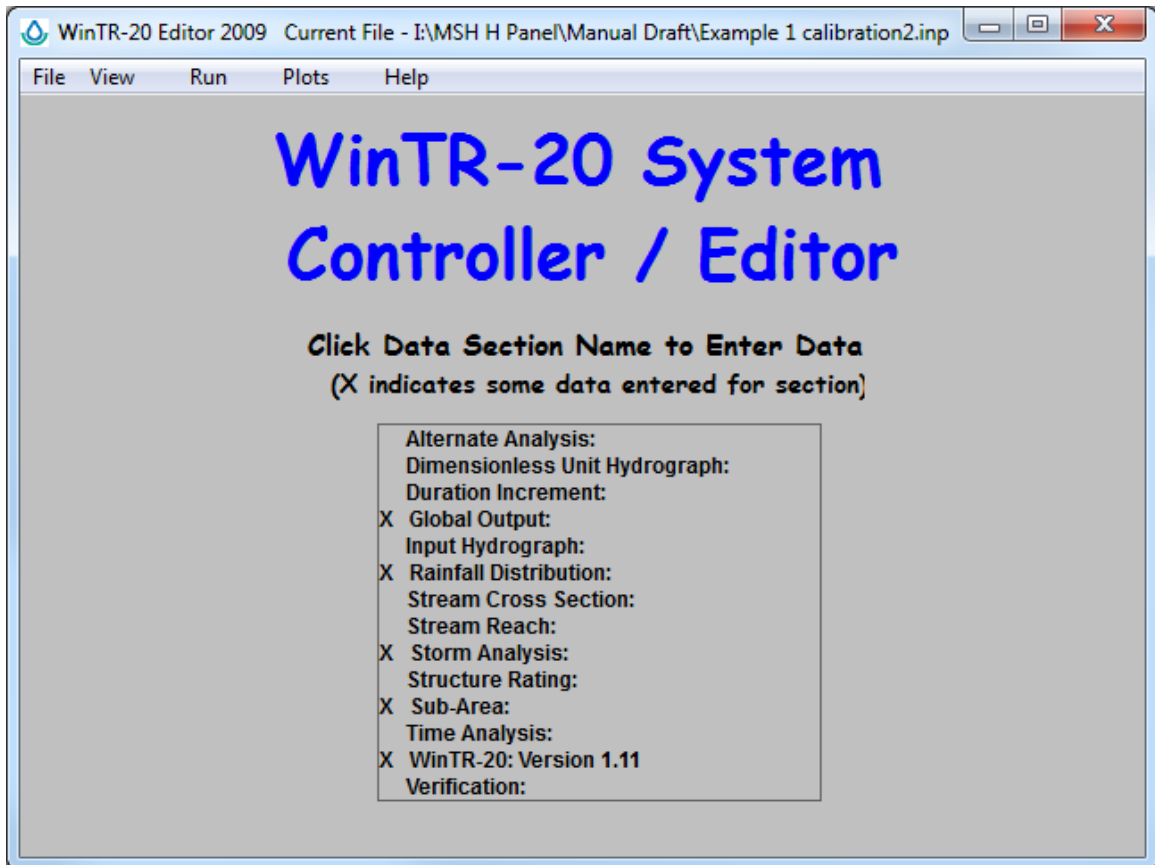

Example 6-hour Rainfall Distribution

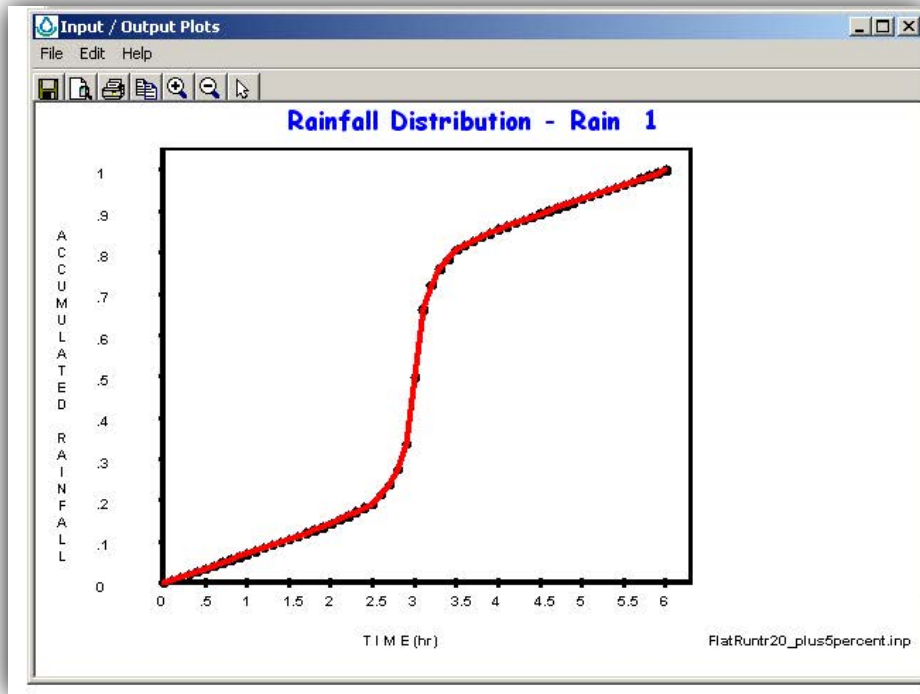

Example 24-hour Rainfall Distribution

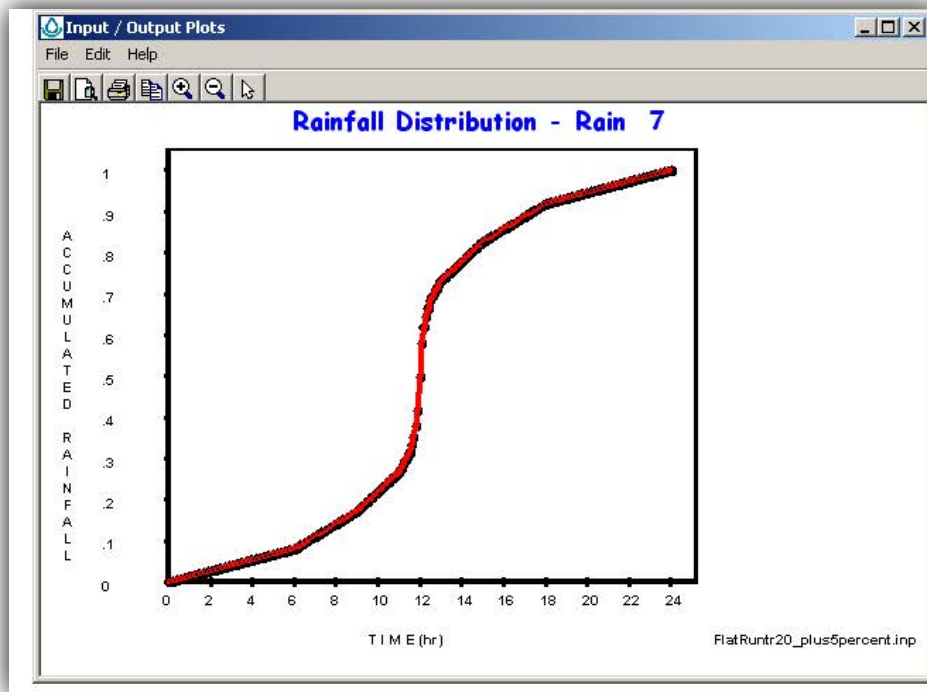

Storm Analysis Current File - I:\MSH H Panel\Manual Draft\Example 1 pre-calibration.inp

Storm Analysis:

Repeat the following for each Storm Identifier and Rain Gage Identifier combination

Storm Identifier: Storm 1

Rain Gage Identifier: |

Gage Starting Time: 0. hr

Gage Rainfall: 2.19 in

Gage Rain Table Identifier: Rain 1

Gage Antecedent Runoff Condition: 1 2 3

2-Yr 24-Hr Rainfall: 3.15 in

| Storm Id | Rain Gage Id | Start | Rain | Rain Table Id | ARC | 2-Yr |
|----------|--------------|-------|------|---------------|-----|------|
| Storm 1 | | 0. | 2.19 | Rain 1 | 2 | 3.15 |
| Storm 2 | | 0. | 3.15 | Rain 2 | 2 | 3.15 |
| Storm 3 | | 0. | 3.20 | Rain 3 | 2 | 3.15 |
| Storm 4 | | 0. | 4.65 | Rain 4 | 2 | 3.15 |
| Storm 5 | | 0. | 5.75 | Rain 5 | 2 | 3.15 |
| Storm 6 | | 0. | 6.75 | Rain 6 | 2 | 3.15 |
| Storm 7 | | 0. | 7.93 | Rain 7 | 2 | 3.15 |

Click row in grid to edit previously entered data. RIGHT click to delete row.

No Changes (Close) Accept Changes (Close)

Sub-Area Current File - I:\MSH H Panel\Manual Draft\Example 1 calibration2.inp

Sub-Area:

Sub-Area Identifier: Area 1 Delete Sub-Area

Sub-Area Reach Identifier: Outlet

Sub-Area Rain Gage Identifier: |

Sub-Area Drainage Area: 10.8 sq mi

Sub-Area Weighted Curve Number: 79.9

Sub-Area Time of Concentration: 3.72 hr

Sub-Area Peak Output Code: Yes No Blank

Sub-Area Hydrograph Output Code: Yes No Blank

Sub-Area Time Analysis Code: Yes No Blank

Sub-Area Hydrograph File Code: Yes No Blank

No Changes (Close) Accept Changes (Close)

WinTR-20 Output

WinTR-20 Printed Page File Beginning of Input Data List
 I:\MSH H Panel\Manual Draft\Example 1 calibration2.inp

WinTR-20: Version 1.11 0 0 1. 0
 MD Rte 140 over Flat Run
 Frederick County MD - Blue Ridge Region - Calibration Example 1

SUB-AREA:
 Area 1 Outlet 10.8 79.9 3.72 Y

STORM ANALYSIS:
 Storm 1 0. 2.19 Rain 1 2 3.15
 Storm 2 0. 3.15 Rain 2 2 3.15
 Storm 3 0. 3.20 Rain 3 2 3.15
 Storm 4 0. 4.65 Rain 4 2 3.15
 Storm 5 0. 5.75 Rain 5 2 3.15
 Storm 6 0. 6.75 Rain 6 2 3.15
 Storm 7 0. 7.93 Rain 7 2 3.15

RAINFALL DISTRIBUTION:
 Rain 1 0.10000
 0.0 0.00710 0.01420 0.02120 0.02830
 0.03540 0.04250 0.04960 0.05660 0.06370
 0.07080 0.07790 0.08500 0.09200 0.09910
 0.10620 0.11360 0.12100 0.12840 0.13580
 0.14320 0.15290 0.16270 0.17250 0.18220
 0.19200 0.21550 0.23910 0.27680 0.33670
 0.50000 0.66330 0.72320 0.76090 0.78450
 0.80800 0.81780 0.82750 0.83730 0.84710
 0.85680 0.86420 0.87160 0.87900 0.88640
 0.89380 0.90090 0.90800 0.91500 0.92210
 0.92920 0.93630 0.94340 0.95040 0.95750
 0.96460 0.97170 0.97880 0.98580 0.99290
 1.00000
 Rain 2 0.10000
 0.0 0.00110 0.00220 0.00330 0.00440
 0.00550 0.00660 0.00770 0.00880 0.00990
 0.01100 0.01210 0.01320 0.01420 0.01530
 0.01640 0.01750 0.01860 0.01970 0.02080
 0.02190 0.02300 0.02410 0.02520 0.02630
 0.02740 0.02850 0.02960 0.03070 0.03180
 0.03290 0.03400 0.03510 0.03620 0.03730
 0.03840 0.03950 0.04050 0.04160 0.04270
 0.04380 0.04490 0.04600 0.04710 0.04820
 0.04930 0.05040 0.05150 0.05260 0.05370
 0.05480 0.05590 0.05700 0.05810 0.05920
 0.06030 0.06140 0.06250 0.06360 0.06470
 0.06580 0.06860 0.07140 0.07430 0.07710
 0.08000 0.08280 0.08560 0.08850 0.09130
 0.09420 0.09700 0.09980 0.10270 0.10550
 0.10840 0.11120 0.11400 0.11690 0.11970
 0.12260 0.12540 0.12820 0.13110 0.13390
 0.13680 0.13960 0.14240 0.14530 0.14810
 0.15100 0.15590 0.16090 0.16580 0.17070
 0.17570 0.18060 0.18560 0.19050 0.19540
 0.20040 0.20530 0.21030 0.21520 0.22020
 0.22510 0.23030 0.23540 0.24060 0.24580
 0.25090 0.25770 0.26460 0.27140 0.27820
 0.28500 0.30140 0.31790 0.34420 0.38600
 0.50000 0.61400 0.65580 0.68210 0.69860
 0.71500 0.72180 0.72860 0.73540 0.74230

| | | | | | |
|--------|---------|---------|---------|---------|---------|
| | 0.74910 | 0.75420 | 0.75940 | 0.76460 | 0.76970 |
| | 0.77490 | 0.77980 | 0.78480 | 0.78970 | 0.79470 |
| | 0.79960 | 0.80460 | 0.80950 | 0.81440 | 0.81940 |
| | 0.82430 | 0.82930 | 0.83420 | 0.83910 | 0.84410 |
| | 0.84900 | 0.85190 | 0.85470 | 0.85760 | 0.86040 |
| | 0.86320 | 0.86610 | 0.86890 | 0.87180 | 0.87460 |
| | 0.87740 | 0.88030 | 0.88310 | 0.88600 | 0.88880 |
| | 0.89160 | 0.89450 | 0.89730 | 0.90020 | 0.90300 |
| | 0.90580 | 0.90870 | 0.91150 | 0.91440 | 0.91720 |
| | 0.92000 | 0.92290 | 0.92570 | 0.92860 | 0.93140 |
| | 0.93420 | 0.93530 | 0.93640 | 0.93750 | 0.93860 |
| | 0.93970 | 0.94080 | 0.94190 | 0.94300 | 0.94410 |
| | 0.94520 | 0.94630 | 0.94740 | 0.94850 | 0.94960 |
| | 0.95070 | 0.95180 | 0.95290 | 0.95400 | 0.95510 |
| | 0.95620 | 0.95730 | 0.95840 | 0.95950 | 0.96050 |
| | 0.96160 | 0.96270 | 0.96380 | 0.96490 | 0.96600 |
| | 0.96710 | 0.96820 | 0.96930 | 0.97040 | 0.97150 |
| | 0.97260 | 0.97370 | 0.97480 | 0.97590 | 0.97700 |
| | 0.97810 | 0.97920 | 0.98030 | 0.98140 | 0.98250 |
| | 0.98360 | 0.98470 | 0.98580 | 0.98680 | 0.98790 |
| | 0.98900 | 0.99010 | 0.99120 | 0.99230 | 0.99340 |
| | 0.99450 | 0.99560 | 0.99670 | 0.99780 | 0.99890 |
| | 1.00000 | | | | |
| Rain 3 | | 0.10000 | | | |
| | 0.0 | 0.00680 | 0.01350 | 0.02030 | 0.02710 |
| | 0.03380 | 0.04060 | 0.04740 | 0.05410 | 0.06090 |
| | 0.06760 | 0.07440 | 0.08120 | 0.08790 | 0.09470 |
| | 0.10150 | 0.10860 | 0.11580 | 0.12290 | 0.13010 |
| | 0.13720 | 0.14830 | 0.15940 | 0.17050 | 0.18170 |
| | 0.19280 | 0.21980 | 0.24690 | 0.28820 | 0.32000 |
| | 0.50000 | 0.68000 | 0.71180 | 0.75310 | 0.78020 |
| | 0.80720 | 0.81830 | 0.82950 | 0.84060 | 0.85170 |
| | 0.86280 | 0.86990 | 0.87710 | 0.88420 | 0.89140 |
| | 0.89850 | 0.90530 | 0.91210 | 0.91880 | 0.92560 |
| | 0.93240 | 0.93910 | 0.94590 | 0.95260 | 0.95940 |
| | 0.96620 | 0.97290 | 0.97970 | 0.98650 | 0.99320 |
| | 1.00000 | | | | |
| Rain 4 | | 0.10000 | | | |
| | 0.0 | 0.00120 | 0.00240 | 0.00360 | 0.00480 |
| | 0.00600 | 0.00720 | 0.00840 | 0.00960 | 0.01080 |
| | 0.01200 | 0.01320 | 0.01450 | 0.01570 | 0.01690 |
| | 0.01810 | 0.01930 | 0.02050 | 0.02170 | 0.02290 |
| | 0.02410 | 0.02530 | 0.02650 | 0.02770 | 0.02890 |
| | 0.03010 | 0.03130 | 0.03250 | 0.03370 | 0.03490 |
| | 0.03610 | 0.03730 | 0.03850 | 0.03970 | 0.04090 |
| | 0.04220 | 0.04340 | 0.04460 | 0.04580 | 0.04700 |
| | 0.04820 | 0.04940 | 0.05060 | 0.05180 | 0.05300 |
| | 0.05420 | 0.05540 | 0.05660 | 0.05780 | 0.05900 |
| | 0.06020 | 0.06140 | 0.06260 | 0.06380 | 0.06500 |
| | 0.06620 | 0.06740 | 0.06860 | 0.06990 | 0.07110 |
| | 0.07230 | 0.07510 | 0.07800 | 0.08080 | 0.08370 |
| | 0.08650 | 0.08940 | 0.09220 | 0.09510 | 0.09790 |
| | 0.10080 | 0.10360 | 0.10650 | 0.10930 | 0.11220 |
| | 0.11500 | 0.11790 | 0.12070 | 0.12360 | 0.12640 |
| | 0.12930 | 0.13210 | 0.13500 | 0.13780 | 0.14070 |
| | 0.14350 | 0.14640 | 0.14920 | 0.15210 | 0.15490 |
| | 0.15780 | 0.16240 | 0.16700 | 0.17170 | 0.17630 |
| | 0.18090 | 0.18550 | 0.19020 | 0.19480 | 0.19940 |
| | 0.20410 | 0.20870 | 0.21330 | 0.21800 | 0.22260 |
| | 0.22720 | 0.23210 | 0.23700 | 0.24190 | 0.24680 |
| | 0.25170 | 0.25930 | 0.26690 | 0.27450 | 0.28210 |
| | 0.28970 | 0.30820 | 0.32670 | 0.35500 | 0.37680 |
| | 0.50000 | 0.62320 | 0.64500 | 0.67330 | 0.69180 |
| | 0.71030 | 0.71790 | 0.72550 | 0.73310 | 0.74070 |
| | 0.74830 | 0.75320 | 0.75810 | 0.76300 | 0.76790 |
| | 0.77280 | 0.77740 | 0.78200 | 0.78670 | 0.79130 |
| | 0.79590 | 0.80060 | 0.80520 | 0.80980 | 0.81450 |
| | 0.81910 | 0.82370 | 0.82830 | 0.83300 | 0.83760 |

| | | | | |
|---------|---------|---------|---------|---------|
| 0.84220 | 0.84510 | 0.84790 | 0.85080 | 0.85360 |
| 0.85650 | 0.85930 | 0.86220 | 0.86500 | 0.86790 |
| 0.87070 | 0.87360 | 0.87640 | 0.87930 | 0.88210 |
| 0.88500 | 0.88780 | 0.89070 | 0.89350 | 0.89640 |
| 0.89920 | 0.90210 | 0.90490 | 0.90780 | 0.91060 |
| 0.91350 | 0.91630 | 0.91920 | 0.92200 | 0.92490 |
| 0.92770 | 0.92890 | 0.93010 | 0.93140 | 0.93260 |
| 0.93380 | 0.93500 | 0.93620 | 0.93740 | 0.93860 |
| 0.93980 | 0.94100 | 0.94220 | 0.94340 | 0.94460 |
| 0.94580 | 0.94700 | 0.94820 | 0.94940 | 0.95060 |
| 0.95180 | 0.95300 | 0.95420 | 0.95540 | 0.95660 |
| 0.95780 | 0.95910 | 0.96030 | 0.96150 | 0.96270 |
| 0.96390 | 0.96510 | 0.96630 | 0.96750 | 0.96870 |
| 0.96990 | 0.97110 | 0.97230 | 0.97350 | 0.97470 |
| 0.97590 | 0.97710 | 0.97830 | 0.97950 | 0.98070 |
| 0.98190 | 0.98310 | 0.98430 | 0.98550 | 0.98680 |
| 0.98800 | 0.98920 | 0.99040 | 0.99160 | 0.99280 |
| 0.99400 | 0.99520 | 0.99640 | 0.99760 | 0.99880 |
| 1.00000 | | | | |

Rain 5

| | | | | |
|---------|---------|---------|---------|---------|
| 0.10000 | | | | |
| 0.0 | 0.00130 | 0.00250 | 0.00380 | 0.00510 |
| 0.00640 | 0.00760 | 0.00890 | 0.01020 | 0.01140 |
| 0.01270 | 0.01400 | 0.01520 | 0.01650 | 0.01780 |
| 0.01910 | 0.02030 | 0.02160 | 0.02290 | 0.02410 |
| 0.02540 | 0.02670 | 0.02790 | 0.02920 | 0.03050 |
| 0.03180 | 0.03300 | 0.03430 | 0.03560 | 0.03680 |
| 0.03810 | 0.03940 | 0.04060 | 0.04190 | 0.04320 |
| 0.04450 | 0.04570 | 0.04700 | 0.04830 | 0.04950 |
| 0.05080 | 0.05210 | 0.05340 | 0.05460 | 0.05590 |
| 0.05720 | 0.05840 | 0.05970 | 0.06100 | 0.06220 |
| 0.06350 | 0.06480 | 0.06610 | 0.06730 | 0.06860 |
| 0.06990 | 0.07110 | 0.07240 | 0.07370 | 0.07490 |
| 0.07620 | 0.07910 | 0.08200 | 0.08500 | 0.08790 |
| 0.09080 | 0.09370 | 0.09660 | 0.09950 | 0.10240 |
| 0.10530 | 0.10820 | 0.11110 | 0.11410 | 0.11700 |
| 0.11990 | 0.12280 | 0.12570 | 0.12860 | 0.13150 |
| 0.13440 | 0.13730 | 0.14030 | 0.14320 | 0.14610 |
| 0.14900 | 0.15190 | 0.15480 | 0.15770 | 0.16060 |
| 0.16350 | 0.16820 | 0.17280 | 0.17740 | 0.18200 |
| 0.18670 | 0.19130 | 0.19590 | 0.20050 | 0.20510 |
| 0.20980 | 0.21440 | 0.21900 | 0.22360 | 0.22820 |
| 0.23290 | 0.23760 | 0.24240 | 0.24710 | 0.25190 |
| 0.25660 | 0.26490 | 0.27320 | 0.28150 | 0.28980 |
| 0.29820 | 0.31720 | 0.33620 | 0.36440 | 0.40520 |
| 0.50000 | 0.59480 | 0.63560 | 0.66380 | 0.68280 |
| 0.70180 | 0.71020 | 0.71850 | 0.72680 | 0.73510 |
| 0.74340 | 0.74810 | 0.75290 | 0.75760 | 0.76240 |
| 0.76710 | 0.77180 | 0.77640 | 0.78100 | 0.78560 |
| 0.79020 | 0.79490 | 0.79950 | 0.80410 | 0.80870 |
| 0.81330 | 0.81800 | 0.82260 | 0.82720 | 0.83180 |
| 0.83650 | 0.83940 | 0.84230 | 0.84520 | 0.84810 |
| 0.85100 | 0.85390 | 0.85680 | 0.85970 | 0.86270 |
| 0.86560 | 0.86850 | 0.87140 | 0.87430 | 0.87720 |
| 0.88010 | 0.88300 | 0.88590 | 0.88890 | 0.89180 |
| 0.89470 | 0.89760 | 0.90050 | 0.90340 | 0.90630 |
| 0.90920 | 0.91210 | 0.91500 | 0.91800 | 0.92090 |
| 0.92380 | 0.92510 | 0.92630 | 0.92760 | 0.92890 |
| 0.93010 | 0.93140 | 0.93270 | 0.93390 | 0.93520 |
| 0.93650 | 0.93780 | 0.93900 | 0.94030 | 0.94160 |
| 0.94280 | 0.94410 | 0.94540 | 0.94660 | 0.94790 |
| 0.94920 | 0.95050 | 0.95170 | 0.95300 | 0.95430 |
| 0.95550 | 0.95680 | 0.95810 | 0.95940 | 0.96060 |
| 0.96190 | 0.96320 | 0.96440 | 0.96570 | 0.96700 |
| 0.96820 | 0.96950 | 0.97080 | 0.97210 | 0.97330 |
| 0.97460 | 0.97590 | 0.97710 | 0.97840 | 0.97970 |
| 0.98090 | 0.98220 | 0.98350 | 0.98480 | 0.98600 |
| 0.98730 | 0.98860 | 0.98980 | 0.99110 | 0.99240 |
| 0.99360 | 0.99490 | 0.99620 | 0.99750 | 0.99870 |

| | | | | | |
|--------|---------|---------|---------|---------|---------|
| | 1.00000 | | | | |
| Rain 6 | 0.10000 | | | | |
| | 0.0 | 0.00130 | 0.00260 | 0.00390 | 0.00530 |
| | 0.00660 | 0.00790 | 0.00920 | 0.01050 | 0.01180 |
| | 0.01310 | 0.01440 | 0.01580 | 0.01710 | 0.01840 |
| | 0.01970 | 0.02100 | 0.02230 | 0.02360 | 0.02500 |
| | 0.02630 | 0.02760 | 0.02890 | 0.03020 | 0.03150 |
| | 0.03280 | 0.03410 | 0.03550 | 0.03680 | 0.03810 |
| | 0.03940 | 0.04070 | 0.04200 | 0.04330 | 0.04470 |
| | 0.04600 | 0.04730 | 0.04860 | 0.04990 | 0.05120 |
| | 0.05250 | 0.05380 | 0.05520 | 0.05650 | 0.05780 |
| | 0.05910 | 0.06040 | 0.06170 | 0.06300 | 0.06430 |
| | 0.06570 | 0.06700 | 0.06830 | 0.06960 | 0.07090 |
| | 0.07220 | 0.07350 | 0.07490 | 0.07620 | 0.07750 |
| | 0.07880 | 0.08180 | 0.08480 | 0.08770 | 0.09070 |
| | 0.09370 | 0.09670 | 0.09970 | 0.10270 | 0.10560 |
| | 0.10860 | 0.11160 | 0.11460 | 0.11760 | 0.12060 |
| | 0.12350 | 0.12650 | 0.12950 | 0.13250 | 0.13550 |
| | 0.13840 | 0.14140 | 0.14440 | 0.14740 | 0.15040 |
| | 0.15340 | 0.15630 | 0.15930 | 0.16230 | 0.16530 |
| | 0.16830 | 0.17300 | 0.17760 | 0.18230 | 0.18700 |
| | 0.19170 | 0.19640 | 0.20100 | 0.20570 | 0.21040 |
| | 0.21510 | 0.21970 | 0.22440 | 0.22910 | 0.23380 |
| | 0.23850 | 0.24310 | 0.24770 | 0.25240 | 0.25700 |
| | 0.26160 | 0.27060 | 0.27950 | 0.28840 | 0.29740 |
| | 0.30630 | 0.32550 | 0.34480 | 0.37260 | 0.41170 |
| | 0.50000 | 0.58830 | 0.62740 | 0.65520 | 0.67450 |
| | 0.69370 | 0.70260 | 0.71160 | 0.72050 | 0.72940 |
| | 0.73840 | 0.74300 | 0.74760 | 0.75230 | 0.75690 |
| | 0.76150 | 0.76620 | 0.77090 | 0.77560 | 0.78030 |
| | 0.78490 | 0.78960 | 0.79430 | 0.79900 | 0.80360 |
| | 0.80830 | 0.81300 | 0.81770 | 0.82240 | 0.82700 |
| | 0.83170 | 0.83470 | 0.83770 | 0.84070 | 0.84370 |
| | 0.84660 | 0.84960 | 0.85260 | 0.85560 | 0.85860 |
| | 0.86160 | 0.86450 | 0.86750 | 0.87050 | 0.87350 |
| | 0.87650 | 0.87940 | 0.88240 | 0.88540 | 0.88840 |
| | 0.89140 | 0.89440 | 0.89730 | 0.90030 | 0.90330 |
| | 0.90630 | 0.90930 | 0.91230 | 0.91520 | 0.91820 |
| | 0.92120 | 0.92250 | 0.92380 | 0.92510 | 0.92650 |
| | 0.92780 | 0.92910 | 0.93040 | 0.93170 | 0.93300 |
| | 0.93430 | 0.93570 | 0.93700 | 0.93830 | 0.93960 |
| | 0.94090 | 0.94220 | 0.94350 | 0.94480 | 0.94620 |
| | 0.94750 | 0.94880 | 0.95010 | 0.95140 | 0.95270 |
| | 0.95400 | 0.95530 | 0.95670 | 0.95800 | 0.95930 |
| | 0.96060 | 0.96190 | 0.96320 | 0.96450 | 0.96590 |
| | 0.96720 | 0.96850 | 0.96980 | 0.97110 | 0.97240 |
| | 0.97370 | 0.97500 | 0.97640 | 0.97770 | 0.97900 |
| | 0.98030 | 0.98160 | 0.98290 | 0.98420 | 0.98560 |
| | 0.98690 | 0.98820 | 0.98950 | 0.99080 | 0.99210 |
| | 0.99340 | 0.99470 | 0.99610 | 0.99740 | 0.99870 |
| | 1.00000 | | | | |
| Rain 7 | 0.10000 | | | | |
| | 0.0 | 0.00140 | 0.00270 | 0.00410 | 0.00540 |
| | 0.00680 | 0.00810 | 0.00950 | 0.01080 | 0.01220 |
| | 0.01350 | 0.01490 | 0.01620 | 0.01760 | 0.01890 |
| | 0.02030 | 0.02160 | 0.02300 | 0.02440 | 0.02570 |
| | 0.02710 | 0.02840 | 0.02980 | 0.03110 | 0.03250 |
| | 0.03380 | 0.03520 | 0.03650 | 0.03790 | 0.03920 |
| | 0.04060 | 0.04190 | 0.04330 | 0.04470 | 0.04600 |
| | 0.04740 | 0.04870 | 0.05010 | 0.05140 | 0.05280 |
| | 0.05410 | 0.05550 | 0.05680 | 0.05820 | 0.05950 |
| | 0.06090 | 0.06220 | 0.06360 | 0.06490 | 0.06630 |
| | 0.06770 | 0.06900 | 0.07040 | 0.07170 | 0.07310 |
| | 0.07440 | 0.07580 | 0.07710 | 0.07850 | 0.07980 |
| | 0.08120 | 0.08420 | 0.08730 | 0.09040 | 0.09340 |
| | 0.09650 | 0.09950 | 0.10260 | 0.10570 | 0.10870 |
| | 0.11180 | 0.11490 | 0.11790 | 0.12100 | 0.12400 |
| | 0.12710 | 0.13020 | 0.13320 | 0.13630 | 0.13930 |

| | | | | |
|---------|---------|---------|---------|---------|
| 0.14240 | 0.14550 | 0.14850 | 0.15160 | 0.15460 |
| 0.15770 | 0.16080 | 0.16380 | 0.16690 | 0.16990 |
| 0.17300 | 0.17780 | 0.18250 | 0.18730 | 0.19210 |
| 0.19690 | 0.20160 | 0.20640 | 0.21120 | 0.21600 |
| 0.22070 | 0.22550 | 0.23030 | 0.23510 | 0.23980 |
| 0.24460 | 0.24920 | 0.25370 | 0.25830 | 0.26290 |
| 0.26750 | 0.27700 | 0.28660 | 0.29610 | 0.30570 |
| 0.31520 | 0.33440 | 0.35360 | 0.38070 | 0.41820 |
| 0.50000 | 0.58180 | 0.61930 | 0.64640 | 0.66560 |
| 0.68480 | 0.69430 | 0.70390 | 0.71340 | 0.72300 |
| 0.73250 | 0.73710 | 0.74170 | 0.74630 | 0.75080 |
| 0.75540 | 0.76020 | 0.76490 | 0.76970 | 0.77450 |
| 0.77930 | 0.78400 | 0.78880 | 0.79360 | 0.79840 |
| 0.80310 | 0.80790 | 0.81270 | 0.81750 | 0.82220 |
| 0.82700 | 0.83010 | 0.83310 | 0.83620 | 0.83920 |
| 0.84230 | 0.84540 | 0.84840 | 0.85150 | 0.85450 |
| 0.85760 | 0.86070 | 0.86370 | 0.86680 | 0.86980 |
| 0.87290 | 0.87600 | 0.87900 | 0.88210 | 0.88510 |
| 0.88820 | 0.89130 | 0.89430 | 0.89740 | 0.90050 |
| 0.90350 | 0.90660 | 0.90960 | 0.91270 | 0.91580 |
| 0.91880 | 0.92020 | 0.92150 | 0.92290 | 0.92420 |
| 0.92560 | 0.92690 | 0.92830 | 0.92960 | 0.93100 |
| 0.93230 | 0.93370 | 0.93510 | 0.93640 | 0.93780 |
| 0.93910 | 0.94050 | 0.94180 | 0.94320 | 0.94450 |
| 0.94590 | 0.94720 | 0.94860 | 0.94990 | 0.95130 |
| 0.95260 | 0.95400 | 0.95530 | 0.95670 | 0.95810 |
| 0.95940 | 0.96080 | 0.96210 | 0.96350 | 0.96480 |
| 0.96620 | 0.96750 | 0.96890 | 0.97020 | 0.97160 |
| 0.97290 | 0.97430 | 0.97560 | 0.97700 | 0.97840 |
| 0.97970 | 0.98110 | 0.98240 | 0.98380 | 0.98510 |
| 0.98650 | 0.98780 | 0.98920 | 0.99050 | 0.99190 |
| 0.99320 | 0.99460 | 0.99590 | 0.99730 | 0.99860 |
| 1.00000 | | | | |

GLOBAL OUTPUT:

.25 NNNNN NNNNNN

WinTR-20 Printed Page File End of Input Data List

MD Rte 140 over Flat Run
 Frederick County MD - Blue Ridge Region - Calibration Example 1

Name of printed page file:
 I:\MSH H Panel\Manual Draft\Example 1 calibration2.out

STORM Storm 1

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | ----- Elevation (ft) | Peak Flow Time (hr) | Rate (cfs) | ----- Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|----------------------|---------------------|------------|------------------|
| Area 1 | 10.800 | | 0.677 | | 5.71 | 1166.9 | 108.05 |
| OUTLET | 10.800 | | 0.677 | | 5.71 | 1166.9 | 108.05 |

STORM Storm 2

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | ----- Elevation (ft) | Peak Flow Time (hr) | Rate (cfs) | ----- Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|----------------------|---------------------|------------|------------------|
| Area 1 | 10.800 | | 1.357 | | 14.58 | 1765.7 | 163.49 |
| OUTLET | 10.800 | | 1.357 | | 14.58 | 1765.7 | 163.49 |

STORM Storm 3

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | Elevation (ft) | Peak Time (hr) | Flow Rate (cfs) | Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|----------------|----------------|-----------------|------------|
| Area 1 | 10.800 | | 1.395 | | 5.47 | 2482.4 | 229.85 |
| OUTLET | 10.800 | | 1.395 | | 5.47 | 2482.4 | 229.85 |

STORM Storm 4

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | Elevation (ft) | Peak Time (hr) | Flow Rate (cfs) | Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|----------------|----------------|-----------------|------------|
| Area 1 | 10.800 | | 2.581 | | 14.54 | 3419.0 | 316.57 |
| OUTLET | 10.800 | | 2.581 | | 14.54 | 3419.0 | 316.57 |

STORM Storm 5

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | Elevation (ft) | Peak Time (hr) | Flow Rate (cfs) | Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|----------------|----------------|-----------------|------------|
| Area 1 | 10.800 | | 3.546 | | 14.37 | 4635.3 | 429.20 |
| OUTLET | 10.800 | | 3.546 | | 14.37 | 4635.3 | 429.20 |

STORM Storm 6

MD Rte 140 over Flat Run
 Frederick County MD - Blue Ridge Region - Calibration Example 1

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | ----- Elevation (ft) | Peak Flow Time (hr) | ----- Rate (cfs) | ----- Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|-------------------------|------------------------|---------------------|---------------------|
| Area 1 | 10.800 | | 4.453 | | 14.37 | 5708.2 | 528.54 |
| OUTLET | 10.800 | | 4.453 | | 14.37 | 5708.2 | 528.54 |

STORM Storm 7

| Area or Reach Identifier | Drainage Area (sq mi) | Rain Gage ID or Location | Runoff Amount (in) | ----- Elevation (ft) | Peak Flow Time (hr) | ----- Rate (cfs) | ----- Rate (csm) |
|--------------------------|-----------------------|--------------------------|--------------------|-------------------------|------------------------|---------------------|---------------------|
| Area 1 | 10.800 | | 5.548 | | 14.32 | 6932.7 | 641.92 |
| OUTLET | 10.800 | | 5.548 | | 14.32 | 6932.7 | 641.92 |

MD Rte 140 over Flat Run
 Frederick County MD - Blue Ridge Region - Calibration Example 1

| Area or Reach Identifier | Drainage Area (sq mi) | Alternate | ----- Peak Flow by Storm ----- | | | | |
|--------------------------|-----------------------|-----------|--------------------------------|---------------|---------------|---------------|---------------|
| | | | Storm 1 (cfs) | Storm 2 (cfs) | Storm 3 (cfs) | Storm 4 (cfs) | Storm 5 (cfs) |
| Area 1 | 10.800 | | 1166.9 | 1765.7 | 2482.4 | 3419.0 | 4635.3 |
| OUTLET | 10.800 | | 1166.9 | 1765.7 | 2482.4 | 3419.0 | 4635.3 |

| Area or Reach Identifier | Drainage Area (sq mi) | Alternate | ----- Peak Flow by Storm ----- | | | | |
|--------------------------|-----------------------|-----------|--------------------------------|---------------|-------|-------|-------|
| | | | Storm 6 (cfs) | Storm 7 (cfs) | (cfs) | (cfs) | (cfs) |
| Area 1 | 10.800 | | 5708.2 | 6932.7 | | | |
| OUTLET | 10.800 | | 5708.2 | 6932.7 | | | |

Blank page inserted to preserve left-right pagination format.

**APPENDIX 6
REGRESSION EQUATIONS FOR
ESTIMATING THE
TIME OF CONCENTRATION**

REGRESSION EQUATION FOR ESTIMATING THE TIME OF CONCENTRATION

Time of concentration (T_c) can be defined from an observed rainfall hyetograph and the resulting discharge hydrograph. T_c is estimated as the time between the end of rainfall excess and the first inflection point on the recession of the runoff hydrograph. The T_c values were computed from rainfall-runoff data compiled by the Dillow (1998) as part of a flood hydrograph study for the Maryland State Highway Administration.

Dillow (1998) compiled data for 278 rainfall-runoff events at 81 gaging stations in Maryland. Not all of the 278 events were suitable in defining T_c for our study. For some rainfall-runoff events, it was not possible to detect an inflection point on the recession of the hydrograph. On average, about three events were used in determining the average T_c for a watershed. For three gaging stations, there were no rainfall-runoff events suitable for determining T_c . Therefore, data for 78 gaging stations are used in developing a regression equation for estimating T_c for ungaged watersheds. The average T_c values and watershed characteristics are given in Table A6.1.

Stepwise regression analysis is used to relate the average T_c value at 78 gaging stations to the watershed characteristics given in Table A6.1. The watershed characteristics used in this analysis were taken from Dillow (1998). Some of the watershed characteristics that are highly correlated with T_c are also highly correlated with each other. For example, drainage area has a correlation coefficient of 0.98 with channel length. Since these two variables are highly correlated, both variables are not significant in the regression analysis because they are essentially explaining the same variation in T_c . The regression equation based on channel length has a slightly lower standard error than the one with drainage area and so channel length is used in the final equation. Channel length also is a better predictor of travel time for a variety of watershed shapes.

Using Dillow's approach (1998), qualitative variables are used in the regression analysis to identify gaging stations in different hydrologic regions in Maryland. Dillow (1998) determined that there are three hydrologic regions for estimating flood hydrographs for Maryland streams: Appalachian Plateau, Piedmont and Coastal Plain. These same regions are assumed applicable in our analysis and are shown in Figure A6.1. The qualitative-variable approach is superior to defining different regression equations for each geographic region because there are only 10 gaging stations in the Appalachian Plateau.

The qualitative variables AP and CP are used in the regression equation to account for variability in T_c not explained by the available explanatory variables. In Table A6.1, a CP value of 1 specifies the watershed is in the Coastal Plain Region, a AP value of 1 specifies the watershed is in the Appalachian Plateau and zero values for both CP and AP specify the watershed is in the Piedmont Region. The T_c values for watersheds in the Appalachian Plateau and Coastal Plains are larger than watersheds in the Piedmont for a

given set of watershed characteristics (see Figure 4.2). The qualitative variables also account for regional differences in T_c related to watershed characteristics not available for analysis. Both AP and CP are highly significant in the regression analysis.

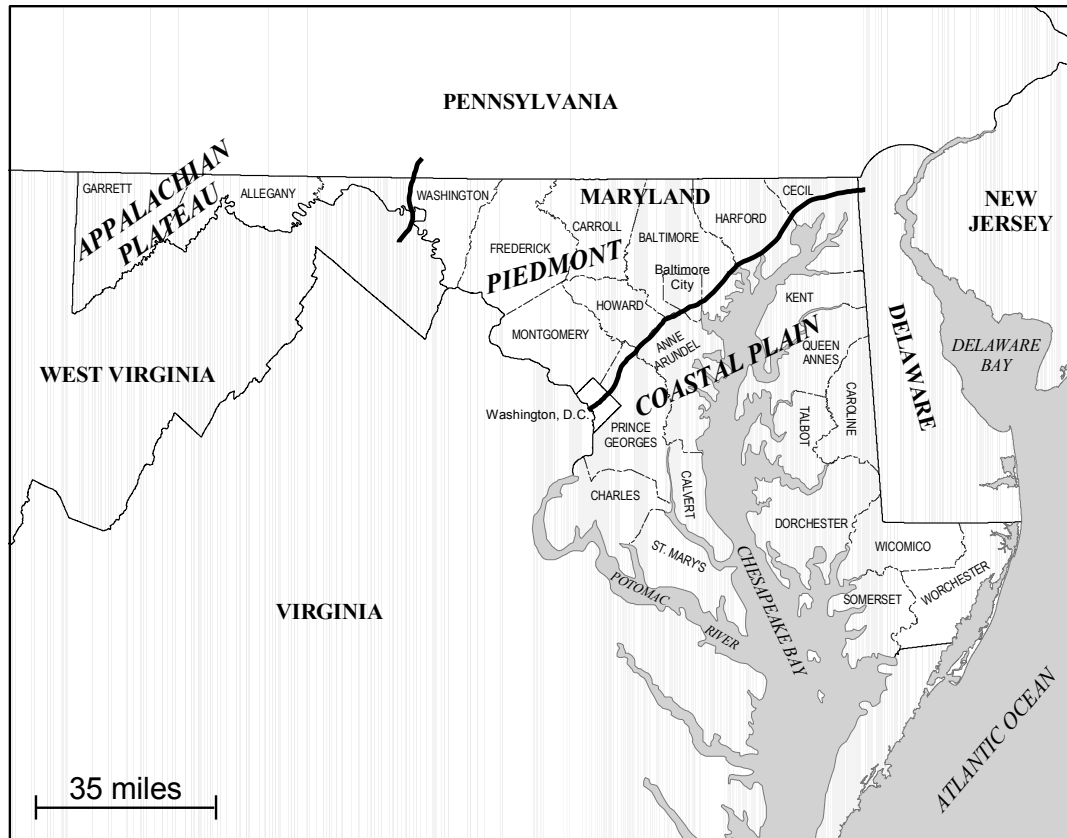


Figure A6-1: Hydrologic regions in Maryland used in developing a regression equation for estimating the time of concentration for ungaged watersheds.

There is considerable variation in hydrology from the Coastal Plains of Maryland to the mountainous Appalachian Plateau. Therefore, several watershed characteristics are statistically significant in predicting T_c . In the following equation, all explanatory variables are significant at the 5 percent level of significance. The coefficient of determination (R^2) is 0.888 percent implying the equation is explaining 88.8 percent of the variation in the observed value of T_c . The standard error of estimate is 30.0 percent.

$$T_c = 0.133 (CL^{.475}) (SL^{-.187}) (101-FOR)^{-.144} (101-IA)^{.861} (ST+1)^{.154} (10^{-.194AP}) (10^{-.366CP}) \quad (A6-1)$$

where

- T_c = time of concentration in hours,
- CL = channel length in miles,
- SL = channel slope in feet per mile,

FOR = forest cover in percentage of the watershed,
IA = impervious area in percentage of the watershed,
ST = lakes and ponds in percentage of the watershed,
AP = 1 if the watershed is in the Appalachian Plateau, 0 otherwise,
CP = 1 if the watershed is in the Coastal Plain, 0 otherwise,
AP and CP = 0 for watersheds in the Piedmont Region.

Equation 1 was computed by transforming the T_c values and watershed characteristics to logarithms and then fitting a linear regression model to the transformed data. This transformation is somewhat standard in hydrologic analyses since the logarithmic transformation tends to stabilize the variance of the residuals, normalize the distribution of the residuals about the regression equation and linearize the equation.

The percentages of forest cover (FOR), impervious area (IA) and storage (ST) can be zero for a given watershed. Therefore, it is necessary to add constants to these variables prior to the logarithmic transformation or to subtract these variables from a constant to avoid taking the logarithm of zero. For our analysis, subtracting the percentages from 101 provided more reasonable estimates of the regression coefficients and slightly reduced the standard error of the regression equation.

Equation 1 can be used to estimate T_c for rural and urban watersheds in Maryland. The percentage of impervious area (IA) is a measure of the urbanization or development in the watershed. In addition, urban watersheds would have a reduced amount of forest cover.

The T_c values in Table A6.1 are generally longer than computed by SCS (1986) procedures for a given watershed area. One possible hypothesis is that this is related to size of the flood event used to determine T_c . In general, the recurrence intervals of peak discharges were less than a 2-yr event. There were only about 30 events across the 78 gaging stations where the peak discharge of the runoff hydrograph was a 5-yr event or greater. An evaluation of the T_c values as a function of recurrence interval revealed that the T_c values did not vary with recurrence interval in any consistent pattern. In some instances, the larger flood events had smaller T_c values and at other stations the converse was true. Therefore, it is not conclusive that the use of larger flood events would result in smaller T_c values

A comparison was also made between estimates of T_c computed from Equation 1 and procedures in SCS (1986) based on travel time. The travel times shown in Table A6.2 were computed by MSHA personnel as a combination of overland flow, shallow concentrated flow and channel flow (SCS, 1986). The times of concentration in Table A6.2 are plotted versus drainage area in Figure A6.2.

Table A6-2: A comparison of time of concentration (T_c) estimated from Equation 1 based on watershed characteristics to T_c values based on travel time.

| Drainage area (mi ²) | Site or Location | Hydrologic Region | Regression T_c (hours) | Travel Time T_c (hours) |
|----------------------------------|---------------------------------|-------------------|--------------------------|---------------------------|
| 6.66 | West Branch @ MD 165 | Piedmont | 3.4 | 3.0 |
| 25.70 | Middle Creek @ MD 17 | Piedmont | 5.9 | 5.2 |
| 5.01 | Mill Creek @ MD 7 | Piedmont | 4.4 | 4.3 |
| 43.73 | Little Gunpowder Falls @ U.S. 1 | Piedmont | 7.9 | 9.0 |
| 3.16 | Little Monacacy River @ MD 109 | Piedmont | 2.7 | 1.5 |
| 6.26 | Blockston Branch @ MD 481 | Coastal Plain | 10.8 | 8.7 |
| 3.24 | Middle Branch @ U.S. Route 113 | Coastal Plain | 9.1 | 7.2 |
| 6.05 | Church Branch @ U.S. Route 113 | Coastal Plain | 11.0 | 10.6 |
| 1.61 | Carey Branch @ U.S. Route 113 | Coastal Plain | 6.0 | 5.7 |
| 6.64 | Birch Branch @ U.S. Route 113 | Coastal Plain | 11.0 | 7.6 |
| 143.5 | Deer Creek @ MD 136 | Piedmont | 14.2 | 19.9 |
| 5.8 | US 50 in Queen Anne's County | Coastal Plain | 11.9 | 6.9 |
| 2.5 | US 50 in Queen Anne's County | Coastal Plain | 8.4 | 4.4 |
| 1.3 | Meadow Branch @ MD 97 | Piedmont | 2.0 | 0.92 |
| 3.7 | Upper Rock Creek @ ICC | Piedmont | 3.0 | 2.1 |
| 3.77 | North Branch @ MD 47 | Appalachian | 4.8 | 2.0 |
| 3.30 | North Branch @ MD 47 | Appalachian | 4.0 | 1.4 |

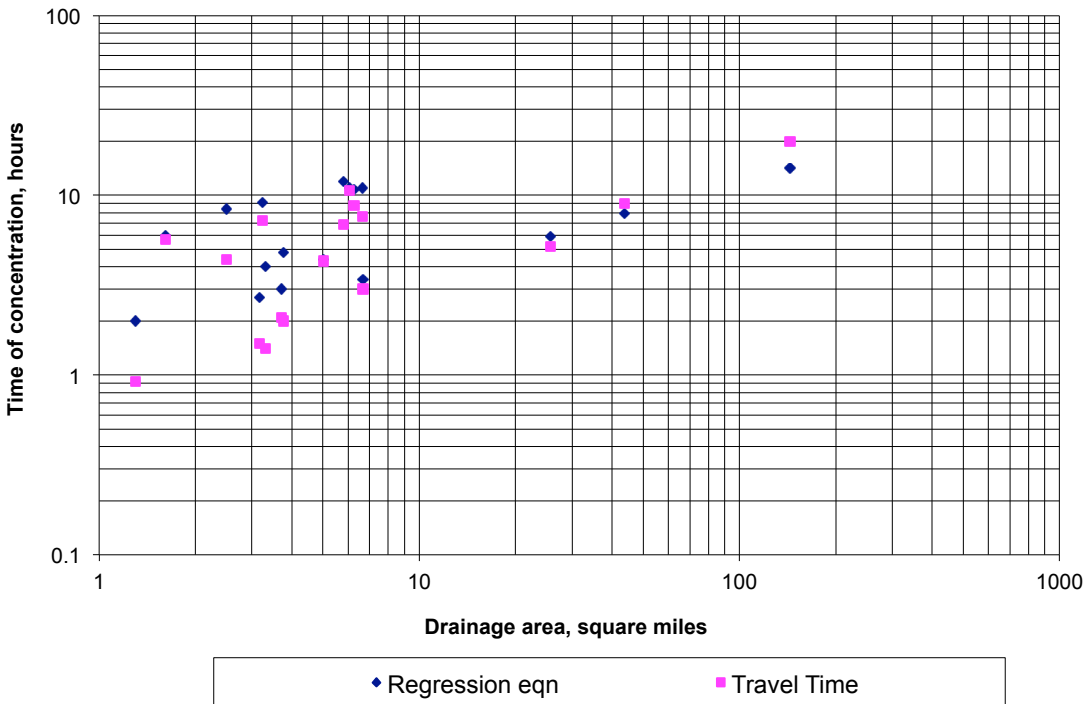


Figure A6-2: Comparison of time of concentration based on Equation A6-1 and the travel time method.

There is close agreement for T_c estimates for several of the sites shown in Table A6-2 and Figure A6-2, especially for the larger watersheds. When there are significant differences, the values based are travel times (also known as the segmental approach) are less than those from the regression equation. Based on this limited comparison, it appears that Equation 1 can be used to determine realistic bounds on T_c estimated by the travel time or segmental approach.

Any regression equation, such as Equation 1, should only be used at ungaged watersheds that have watershed characteristics within the range of those used to develop the equation. The upper and lower limits for the watershed characteristics are given in Table A6-3 for each hydrologic region to define the applicability of Equation 1. Therefore, Equation 1 should not be used for watersheds having characteristics outside the limits of those shown in Table A6-3.

Table A6-3: Upper and lower limits for watershed characteristics for the time of concentration regression equation for each hydrologic region.

| Region | Variable | Upper limit | Lower limit |
|---------------------|----------------------------------|-------------|-------------|
| Appalachian Plateau | Drainage area (mi ²) | 295 | 1.6 |
| Appalachian Plateau | Channel length (mi) | 40.8 | 2.1 |
| Appalachian Plateau | Channel slope (ft/mi) | 195 | 6.1 |
| Appalachian Plateau | Storage (%) | 3.2 | 0.0 |
| Appalachian Plateau | Forest cover (%) | 89 | 54 |
| Appalachian Plateau | Impervious area (%) | 1.25 | 0.0 |
| Piedmont | Drainage area (mi ²) | 494 | 2.1 |
| Piedmont | Channel length (mi) | 70 | 2.2 |
| Piedmont | Channel slope (ft/mi) | 336 | 11 |
| Piedmont | Storage (%) | 1.16 | 0.0 |
| Piedmont | Forest cover (%) | 92 | 2.0 |
| Piedmont | Impervious area (%) | 41 | 0.0 |
| Coastal Plain | Drainage area (mi ²) | 113 | 2.0 |
| Coastal Plain | Channel length (mi) | 18.3 | 2.0 |
| Coastal Plain | Channel slope (ft/mi) | 41.8 | 1.5 |
| Coastal Plain | Storage (%) | 26.0 | 0.0 |
| Coastal Plain | Forest cover (%) | 79 | 5.0 |
| Coastal Plain | Impervious area (%) | 35 | 0.0 |

In summary, Equation 1 is based on estimates of T_c computed from rainfall-runoff events at 78 gaging stations in Maryland. The computed values of T_c tend to be larger than similar estimates based on SCS (1986) procedures. However, Equation 1 can be used to evaluate the reasonableness of T_c estimates from SCS (1986) procedures. Further research is needed to improve the estimation of T_c in Maryland that would ultimately provide for more accurate estimates of design discharges from hydrological models such as TR-20.

Table A6-4: Watershed characteristics and times of concentration for rural and urban watersheds used in developing the regression equations.

STANO is the station number
 DA is the drainage area in square miles
 SL is the channel slope in feet per mile
 CL is channel length in miles
 SIN is the channel sinuosity determined by dividing channel length by basin length
 BL is the basin length in miles
 ST is the percentage area of the drainage area covered by lakes, ponds and swamps
 SH is the basin shape defined as channel length squared divided by drainage area
 FOR is forest cover in percentage of the drainage area
 IA is impervious area expressed as percentage of the drainage area
 BDF is the basin development factor
 LT is the lagtime in hours
 AP = 1 if the watershed is in the Appalachian Plateau, CP = 1 if the watershed is in the Coastal Plains, CP and AP = 0 implies the watershed is in the Piedmont Region
 T_c is the time of concentration in hours

| STANO | DA | SL | CL | SIN | BL | ST | SH | FOR | IA | BDF | LT | AP | CP | T _c |
|----------|------|-------|------|------|-------|-------|------|-----|------|-----|-------|----|----|----------------|
| 01594930 | 8.23 | 26.4 | 4.4 | 1.14 | 3.86 | 0.000 | 1.81 | 86 | 0.00 | 0 | 7.50 | 1 | 0 | 6.38 |
| 01594934 | 1.55 | 161.9 | 2.1 | 1.07 | 1.95 | 0.000 | 2.45 | 82 | 0.00 | 0 | 6.43 | 1 | 0 | 4.00 |
| 01594936 | 1.91 | 130.9 | 2.7 | 1.16 | 2.33 | 0.000 | 2.84 | 87 | 0.00 | 0 | 6.62 | 1 | 0 | 6.00 |
| 01594950 | 2.30 | 194.6 | 2.7 | 1.24 | 2.18 | 0.000 | 2.07 | 89 | 0.00 | 0 | 6.74 | 1 | 0 | 5.00 |
| 01595000 | 73.0 | 30.5 | 16.5 | 1.30 | 12.70 | 0.186 | 2.21 | 78 | 0.49 | 0 | 12.27 | 1 | 0 | 11.50 |
| 01596500 | 49.1 | 65.1 | 19.0 | 1.41 | 13.44 | 0.066 | 3.68 | 80 | 0.06 | 0 | 13.97 | 1 | 0 | 9.75 |
| 03075500 | 134. | 6.09 | 19.3 | 1.59 | 12.12 | 0.493 | 1.10 | 54 | 0.88 | 0 | 22.57 | 1 | 0 | 23.50 |
| 03076500 | 295. | 22.2 | 40.8 | 1.45 | 28.11 | 3.180 | 2.68 | 66 | 0.24 | 0 | 25.10 | 1 | 0 | 29.25 |
| 03076600 | 48.9 | 65.6 | 15.3 | 1.89 | 8.11 | 0.000 | 1.35 | 62 | 1.25 | 0 | 16.47 | 1 | 0 | 11.25 |
| 03078000 | 62.5 | 28.2 | 19.5 | 1.61 | 12.13 | 1.005 | 2.35 | 75 | 0.66 | 0 | 16.88 | 1 | 0 | 19.58 |
| 01614500 | 494. | 11.2 | 69.5 | 2.44 | 28.45 | 0.101 | 1.64 | 37 | 1.43 | 0 | 25.42 | 0 | 0 | 26.33 |
| 01617800 | 18.9 | 23.8 | 9.4 | 1.08 | 8.69 | 0.000 | 4.00 | 2 | 2.32 | 0 | 15.53 | 0 | 0 | . |
| 01619500 | 281. | 10.8 | 49.9 | 1.55 | 32.26 | 0.123 | 3.70 | 30 | 2.67 | 0 | 24.66 | 0 | 0 | 27.12 |
| 01637500 | 66.9 | 47.5 | 23.3 | 1.50 | 15.50 | 0.000 | 3.59 | 38 | 1.01 | 0 | 8.98 | 0 | 0 | 7.62 |
| 01639000 | 173. | 18.9 | 30.8 | 1.92 | 16.05 | 0.114 | 1.49 | 20 | 0.69 | 0 | 15.91 | 0 | 0 | 17.25 |
| 01639375 | 41.3 | 75.4 | 12.2 | 1.40 | 8.70 | 0.207 | 1.83 | 70 | 0.87 | 0 | 3.47 | 0 | 0 | 5.00 |

| STANO | DA | SL | CL | SIN | BL | ST | SH | FOR | IA | BDF | LT | AP | CP | T _c |
|----------|------|-------|------|------|-------|--------|------|-----|------|-----|-------|----|----|----------------|
| 01639500 | 102. | 13.5 | 26.9 | 1.43 | 18.75 | 0.000 | 3.45 | 14 | 0.13 | 0 | 11.80 | 0 | 0 | 8.50 |
| 01640965 | 2.14 | 336.4 | 2.2 | 1.12 | 1.96 | 0.000 | 1.80 | 92 | 0.00 | 0 | 1.78 | 0 | 0 | 1.88 |
| 01641000 | 18.4 | 145.2 | 9.7 | 1.57 | 6.18 | 0.373 | 2.08 | 80 | 1.93 | 1 | 5.11 | 0 | 0 | 5.44 |
| 01483700 | 31.9 | 4.66 | 12.3 | 1.38 | 8.89 | 11.927 | 2.48 | 21 | 4.46 | 2 | 27.41 | 0 | 1 | 32.92 |
| 01484000 | 13.6 | 6.26 | 5.9 | 1.01 | 5.87 | 0.626 | 2.53 | 34 | 0.33 | 0 | 21.04 | 0 | 1 | 20.85 |
| 01484500 | 5.24 | 4.87 | 4.4 | 1.19 | 3.70 | 0.000 | 2.61 | 39 | 3.24 | 0 | 12.82 | 0 | 1 | 14.88 |
| 01484548 | 13.6 | 4.39 | 7.9 | 1.22 | 6.48 | 26.055 | 3.09 | 33 | 1.13 | 0 | 24.28 | 0 | 1 | 31.75 |
| 01485000 | 60.5 | 1.49 | 14.6 | 1.18 | 12.42 | 18.396 | 2.55 | 25 | 0.08 | 0 | 28.58 | 0 | 1 | 37.00 |
| 01485500 | 44.9 | 3.56 | 12.2 | 1.11 | 10.98 | 1.326 | 2.69 | 79 | 0.30 | 0 | 37.21 | 0 | 1 | 41.75 |
| 01487000 | 75.4 | 3.23 | 13.7 | 1.20 | 11.44 | 0.000 | 1.74 | 40 | 0.85 | 0 | 20.80 | 0 | 1 | 23.25 |
| 01488500 | 44.8 | 2.65 | 11.7 | 1.17 | 10.00 | 0.000 | 2.23 | 39 | 0.14 | 0 | 12.99 | 0 | 1 | 15.08 |
| 01489000 | 8.50 | 7.65 | 5.3 | 1.46 | 3.64 | 0.000 | 1.87 | 24 | 0.00 | 0 | 5.78 | 0 | 1 | 8.44 |
| 01491000 | 113. | 3.01 | 18.3 | 1.36 | 13.41 | 6.910 | 1.59 | 38 | 0.66 | 0 | 31.57 | 0 | 1 | 36.88 |
| 01493000 | 19.7 | 6.06 | 9.7 | 1.09 | 8.89 | 8.777 | 3.54 | 20 | 0.35 | 0 | 26.10 | 0 | 1 | 22.25 |
| 01493500 | 12.7 | 9.15 | 5.9 | 1.10 | 5.38 | 0.199 | 2.28 | 5 | 0.25 | 0 | 13.35 | 0 | 1 | 16.38 |
| 01483200 | 3.85 | 15.8 | 3.5 | 1.04 | 3.37 | 1.298 | 2.95 | 45 | 0.38 | 0 | 7.37 | 0 | 1 | 11.67 |
| 01484100 | 2.83 | 7.12 | 2.5 | 1.07 | 2.33 | 0.000 | 1.92 | 43 | 0.00 | 0 | 14.54 | 0 | 1 | 15.50 |
| 01486000 | 4.80 | 5.47 | 4.1 | . | . | 0.000 | . | 57 | 0.00 | 0 | . | 0 | 1 | 10.50 |
| 01590500 | 6.92 | 19.8 | 4.7 | 1.14 | 4.12 | 0.000 | 2.45 | 65 | 1.87 | 0 | 10.90 | 0 | 1 | 11.94 |
| 01594526 | 89.7 | 8.2 | 16.1 | 1.18 | 13.60 | 0.037 | 2.06 | 30 | 7.84 | 4 | 23.16 | 0 | 1 | 36.38 |
| 01594670 | 9.38 | 16.9 | 5.2 | 1.30 | 3.99 | 0.000 | 1.70 | 70 | 3.85 | 0 | 9.17 | 0 | 1 | 12.33 |
| 01653600 | 39.5 | 16.1 | 14.4 | 1.64 | 8.79 | 0.176 | 1.96 | 38 | 8.25 | 2 | 17.29 | 0 | 1 | 29.05 |
| 01660920 | 79.9 | 10.6 | 16.6 | 1.15 | 14.48 | 5.051 | 2.62 | 56 | 3.60 | 0 | 26.17 | 0 | 1 | 31.25 |
| 01661050 | 18.5 | 12.4 | 7.2 | 1.22 | 5.92 | 0.000 | 1.89 | 56 | 3.09 | 0 | 14.26 | 0 | 1 | 16.38 |
| 01594710 | 3.26 | 41.8 | 2.9 | 1.08 | 2.68 | 0.000 | 2.20 | 52 | 9.24 | 0 | 3.86 | 0 | 1 | 5.08 |
| 01661500 | 24.0 | 12.9 | 8.0 | 1.28 | 6.25 | 0.000 | 1.63 | 78 | 2.46 | 0 | 15.78 | 0 | 1 | 13.75 |
| 01583600 | 20.9 | 52.0 | 8.2 | 1.43 | 5.72 | 0.309 | 1.57 | 29 | 18.6 | 4 | 5.63 | 0 | 0 | 4.25 |
| 01585100 | 7.61 | 48.2 | 6.0 | 1.12 | 5.38 | 0.000 | 3.80 | 28 | 27.5 | 7 | 2.11 | 0 | 0 | 2.75 |
| 01585200 | 2.13 | 72.7 | 2.2 | 1.12 | 1.97 | 0.000 | 1.82 | 7 | 33.0 | 8 | 1.02 | 0 | 0 | 1.38 |

| STANO | DA | SL | CL | SIN | BL | ST | SH | FOR | IA | BDF | LT | AP | CP | T _c |
|----------|------|------|------|------|-------|-------|------|-----|------|-----|------|----|----|----------------|
| 01585300 | 4.46 | 54.7 | 4.6 | 1.25 | 3.68 | 0.558 | 3.04 | 28 | 23.6 | 6 | 2.06 | 0 | 0 | 2.38 |
| 01585400 | 1.97 | 27.1 | 2.0 | 1.22 | 1.64 | 0.000 | 1.37 | 24 | 35.1 | 2 | 2.33 | 0 | 1 | 3.25 |
| 01589100 | 2.47 | 87.1 | 3.2 | 1.22 | 2.62 | 0.000 | 2.78 | 19 | 37.0 | 4 | 1.67 | 0 | 0 | 2.17 |
| 01589300 | 32.5 | 21.0 | 13.7 | 1.37 | 9.99 | 0.000 | 3.07 | 31 | 18.6 | 4 | 3.95 | 0 | 0 | 3.38 |
| 01589330 | 5.52 | 52.1 | 3.2 | 1.12 | 2.86 | 0.000 | 1.48 | 4 | 40.8 | 12 | 2.26 | 0 | 0 | 2.83 |
| 01589500 | 4.97 | 24.8 | 4.4 | 1.17 | 3.75 | 0.000 | 2.83 | 44 | 21.9 | 3 | 8.19 | 0 | 1 | . |
| 01589512 | 8.24 | 23.5 | 5.9 | 1.17 | 5.04 | 1.092 | 3.08 | 31 | 30.8 | 3 | 6.72 | 0 | 1 | 7.75 |
| 01593500 | 38.0 | 15.8 | 15.5 | 1.40 | 11.04 | 0.623 | 3.21 | 23 | 18.7 | 6 | 7.48 | 0 | 0 | 10.58 |
| 01645200 | 3.70 | 67.4 | 2.7 | 1.16 | 2.33 | 0.000 | 1.47 | 14 | 28.0 | 6 | 1.91 | 0 | 0 | 2.75 |
| 01649500 | 72.8 | 27.2 | 15.3 | 1.33 | 11.54 | 0.192 | 1.83 | 33 | 22.0 | 5 | 8.85 | 0 | 0 | 7.25 |
| 01651000 | 49.4 | 19.7 | 19.1 | 1.36 | 14.05 | 0.047 | 4.00 | 19 | 22.0 | 6 | 6.45 | 0 | 0 | 6.58 |
| 01495000 | 52.6 | 17.9 | 22.2 | 1.41 | 15.80 | 0.053 | 4.75 | 14 | 1.92 | 0 | 9.87 | 0 | 0 | 8.88 |
| 01496200 | 9.03 | 29.0 | 5.9 | 1.36 | 4.33 | 0.000 | 2.08 | 4 | 0.00 | 0 | 4.38 | 0 | 0 | 5.81 |
| 01580000 | 94.4 | 17.7 | 27.3 | 1.52 | 17.92 | 0.039 | 3.40 | 27 | 0.42 | 0 | 7.29 | 0 | 0 | 7.50 |
| 01581657 | 4.16 | 74.2 | 3.7 | 1.19 | 3.12 | 0.000 | 2.34 | 33 | 5.25 | 0 | 4.08 | 0 | 0 | 3.83 |
| 01581658 | 5.22 | 56.1 | 4.8 | 1.28 | 3.74 | 0.000 | 2.68 | 31 | 4.78 | 0 | 4.38 | 0 | 0 | 4.92 |
| 01581700 | 34.8 | 30.0 | 15.8 | 1.60 | 9.89 | 0.000 | 2.81 | 21 | 2.37 | 2 | 4.68 | 0 | 0 | 3.50 |
| 01582000 | 52.9 | 33.8 | 15.0 | 1.35 | 11.14 | 0.015 | 2.35 | 32 | 0.91 | 0 | 6.84 | 0 | 0 | 6.62 |
| 01583100 | 12.3 | 50.9 | 7.8 | 1.08 | 7.25 | 0.092 | 4.27 | 26 | 0.29 | 0 | 5.77 | 0 | 0 | 4.50 |
| 01583500 | 59.8 | 24.5 | 15.9 | 1.40 | 11.36 | 0.064 | 2.16 | 22 | 0.16 | 0 | 8.20 | 0 | 0 | 8.08 |
| 01584050 | 9.40 | 70.0 | 4.8 | 1.11 | 4.32 | 0.000 | 1.99 | 13 | 1.00 | 0 | 3.05 | 0 | 0 | 3.00 |
| 01585105 | 2.65 | 65.2 | 3.6 | 1.14 | 3.16 | 0.000 | 3.77 | 16 | 5.22 | 0 | 3.86 | 0 | 0 | 4.00 |
| 01585500 | 3.29 | 56.0 | 3.5 | 1.11 | 3.14 | 1.165 | 3.00 | 21 | 0.45 | 0 | 3.08 | 0 | 0 | 3.12 |
| 01586000 | 56.6 | 28.5 | 14.6 | 1.38 | 10.61 | 0.069 | 1.99 | 19 | 1.77 | 0 | 8.56 | 0 | 0 | 9.75 |
| 01586210 | 14.0 | 44.0 | 8.1 | 1.38 | 5.86 | 0.000 | 2.45 | 19 | 1.77 | 0 | 4.39 | 0 | 0 | 4.00 |
| 01586610 | 28.0 | 30.9 | 10.0 | 1.47 | 6.81 | 0.000 | 1.66 | 20 | 0.38 | 0 | 5.97 | 0 | 0 | 4.58 |
| 01589440 | 25.2 | 38.2 | 9.5 | 1.37 | 6.95 | 0.000 | 1.92 | 34 | 9.92 | 2 | 5.29 | 0 | 0 | 6.92 |
| 01591000 | 34.8 | 28.2 | 12.2 | 1.22 | 10.02 | 0.000 | 2.89 | 21 | 0.21 | 0 | 6.51 | 0 | 0 | 7.12 |
| 01591400 | 22.9 | 28.0 | 8.7 | 1.35 | 6.44 | 0.097 | 1.81 | 16 | 1.52 | 0 | 6.16 | 0 | 0 | 6.83 |

| STANO | DA | SL | CL | SIN | BL | ST | SH | FOR | IA | BDF | LT | AP | CP | T _c |
|----------|------|-------|------|------|-------|-------|------|-----|------|-----|-------|----|----|----------------|
| 01591700 | 27.0 | 26.5 | 10.9 | 1.28 | 8.52 | 0.141 | 2.69 | 19 | 2.08 | 0 | 5.28 | 0 | 0 | 6.83 |
| 01593710 | 48.4 | 17.8 | 14.7 | 1.28 | 11.45 | 0.000 | 2.71 | 24 | 2.16 | 0 | 5.99 | 0 | 0 | 8.25 |
| 01594000 | 98.4 | 13.6 | 23.5 | 1.33 | 17.62 | 0.134 | 3.16 | 26 | 6.52 | 4 | 10.83 | 0 | 0 | 9.88 |
| 01641510 | 0.40 | 817.8 | 0.9 | 1.09 | 0.83 | 0.000 | 1.72 | 100 | 0.00 | 0 | 4.26 | 0 | 0 | . |
| 01643495 | 0.15 | 1000. | 0.5 | 1.13 | 0.44 | 0.000 | 1.29 | 100 | 0.00 | 0 | 1.26 | 0 | 0 | 1.75 |
| 01643500 | 62.8 | 23.8 | 15.6 | 1.43 | 10.89 | 0.000 | 1.89 | 23 | 1.19 | 0 | 7.30 | 0 | 0 | 8.35 |
| 01645000 | 101. | 14.0 | 21.2 | 1.56 | 13.61 | 0.120 | 1.83 | 25 | 3.15 | 4 | 10.88 | 0 | 0 | 4.31 |

Blank page inserted to preserve left-right pagination format.

**APPENDIX 7
PARTIAL DURATION
RAINFALL FREQUENCY DATA
6, 12, AND 24-HOUR TEMPORAL
DISTRIBUTION**

Development of the 24-hour storm distribution from NOAA Atlas 14 Data

Unique storm distributions are recommended for all locations and return periods when using NOAA Atlas 14 data.

The WinTR-20 will import a partial duration text file downloaded from the NOAA Atlas 14 web site and develop storm distributions for each return period from 1-year to 500-years. Even though the 1000-year return period is included in the data, the WinTR-20 is not programmed to accept it. The complete partial duration data for each location may be downloaded from the NOAA Atlas 14 web site, <http://hdsc.nws.noaa.gov/> .

The user of WinTR-20 has the choice to use the original NOAA Atlas 14 data or smoothed data to develop the 24-hour storm distribution. In developing the rainfall-frequency data, NOAA treated each duration independently. In some cases, this causes irregularities in rainfall intensity between durations, which then creates irregularities in 24-hour storm distribution and resulting flood hydrograph.

For example, for a location in Howard County, Maryland, the 100-year 2-hour rainfall is 3.86 inches, the 100-year 3-hour rainfall is 4.20, and the 100-year 6-hour rainfall is 5.39. Between 2 and 3 hours the rainfall intensity is 0.34 inches per hour $((4.20 - 3.86) / 1)$. Between 3 and 6 hours the rainfall intensity is 0.4 inches per hour $((5.39 - 4.20) / 3)$. The data shows the intensity actually increasing as the duration increases. As the duration increases, rainfall intensity should decrease. The smoothing algorithm in the WinTR-20 will smooth data from 5-minutes to 1-hour and from 1-hour to 24-hours while keeping the 1-hour rainfall and 24-hour rainfall unchanged. In the Howard County example, the smoothed values are 4.01 inches for the 100-year 2-hour, 4.69 inches for the 100-year 3-hour, and 5.83 inches for the 100-year 6-hour rainfall. This will produce intensities of 0.68 inches per hour between 2 and 3 hours and 0.38 inches per hour between 3 and 6 hours. The complete smoothing table for the 100-year data follows.

Table A7-1: NOAA Atlas 14 data and smoothed data for location in Howard County, MD

| Duration | 5-min | 10-min | 15-min | 30-min | 60-min | 2-hr | 3-hr | 6-hr | 12-hr | 24-hr |
|---------------------------------|--------------|---------------|---------------|---------------|---------------|-------------|-------------|-------------|--------------|--------------|
| Original rainfall Inches | 0.72 | 1.14 | 1.44 | 2.21 | 3.04 | 3.86 | 4.20 | 5.39 | 7.00 | 8.47 |
| Intensity In/hr | 8.64 | 5.04 | 3.6 | 3.08 | 1.66 | 0.82 | 0.34 | 0.4 | 0.27 | 0.12 |
| Smooth rainfall inches | 0.69 | 1.14 | 1.48 | 2.16 | 3.04 | 4.01 | 4.69 | 5.83 | 7.09 | 8.47 |
| Intensity In/hr | 8.28 | 5.37 | 4.17 | 2.7 | 1.75 | 0.97 | 0.68 | 0.38 | 0.21 | 0.12 |
| Rainfall Difference | -0.03 | 0.0 | 0.04 | -0.05 | 0.0 | 0.15 | 0.49 | 0.44 | 0.09 | 0.0 |

The durations from 5-minutes to 60-minutes are relatively smooth (small difference between original and smoothed rainfall values). The 3-hour and 6-hour rainfall values are increased to provide a smooth relationship of intensity and duration (when plotted on a log-log scale).

This section of Appendix 7 discusses in detail how the WinTR-20 generates 24-hour storm distributions based on NOAA Atlas 14 data (5-minutes through 24-hour duration). A spreadsheet was developed which automates the steps. This spread sheet will provide similar (though not exact) results when compared to the WinTR-20 program. The reason the results are not exact is that Fortran and Excel operate with different numbers of significant digits so rounding of numbers is a concern.

The procedure will be described using an example from a location in Howard County Maryland. The 100-year 24-hour storm distribution will be developed using the smoothed rainfall frequency data. The NOAA Atlas 14 data and the ratio of rainfall at each duration to the 24-hour rainfall are in the following table.

Table A7-2: NOAA 14 data and ratios for durations at a location in Howard County, MD

| | 5-min | 10-min | 15-min | 30-min | 60-min | 2-hr | 3-hr | 6-hr | 12-hr | 24-hr |
|-------------------------|--------------|---------------|---------------|---------------|---------------|-------------|-------------|-------------|--------------|--------------|
| Rainfall inches | 0.69 | 1.14 | 1.48 | 2.16 | 3.04 | 4.01 | 4.69 | 5.83 | 7.09 | 8.47 |
| Ratio to 24-hour | 0.081 | 0.135 | 0.175 | 0.255 | 0.359 | 0.473 | 0.554 | 0.688 | 0.837 | 1.000 |

A symmetrical nested preliminary distribution is developed based on the ratios from 10-minutes to 24-hours. The mid-point of the preliminary distribution is 50% of the cumulative rainfall at 12.0 hours. It is symmetrical about 12 hours and places each duration 50% before 12 hours and 50% after 12 hours. For example, the 60-minute duration rainfall ratio is 0.3589. At 11.5 hours, one-half of 0.3589 is subtracted from 0.5 to calculate the cumulative ratio at 11.5 hours of 0.32054.

The preliminary distribution from 0.0 to 12.0 hours is shown in the following table.

Table A7-3: Preliminary rainfall distribution from 1 hour to 12 hours.

| Time-hours | 0.0 | 6 | 9 | 10.5 | 11 | 11.5 | 11.75 | 11.875 | 11.9167 | 12.0 |
|-------------------|------------|----------|----------|-------------|-----------|-------------|--------------|---------------|----------------|-------------|
| Cum Ratio | 0.0 | 0.08146 | 0.15584 | 0.22314 | 0.26328 | 0.32054 | 0.41623 | 0.4327 | 0.45927 | 0.5 |

Once this preliminary distribution is developed, the next step is to develop the distribution ratios at a time interval of 0.1 hour. The general concept is to interpolate the ratios between the points in the above table at an interval of 0.1 hour. The ratios at 6, 9, 10.5, 11.0 and 11.5 are preserved in the final distribution. Ratios for times of 0.1 to 11.7 hours are based on slightly curved line segments between the ratios at the points in the table above. The slight curvature insures a gradual increase of rainfall intensity from 0.0 to 11.7 hours. Values for 11.8 and 11.9 hours are linearly interpolated between ratios at 11.75, 11.875, and 11.9167 hours. After the distribution from 0.0 to 12.0 hours is developed the ratios from 12.1 to 24 are calculated by subtracting the ratio of the opposite value from 1.0. For example, the ratio at 12.1 equals 1.0 minus the ratio at 11.9 hours. The ratio at 12.2 hours is equal to 1.0 minus the ratio at 11.8. This continues all the way to the ends where at time 0.0 the ratio is 0.0 and at 24.0 hours the ratio is 1.0. The 5-minute rainfall ratio has not been considered yet. In order to include the 5-minute ratio, the ratio at 6-minutes (0.1 hour) is calculated as:

$$\text{6-minute ratio} = \text{5-minute ratio} + 0.2 * (\text{10-minute ratio} - \text{5-minute ratio})$$

To incorporate this value into the 24-hour distribution, the 6-minute ratio is subtracted from the ratio at 12.1 hours to determine the ratio at 12.0 hours. This causes the ratio at 12.0 hours to be slightly less than 0.5.

Table A7-4: Complete 24-hour distribution table in WinTR-20 (5-column) format at 0.1-hour time increment.

| | | | | |
|---------|---------|---------|---------|---------|
| 0.00000 | 0.00112 | 0.00225 | 0.00339 | 0.00454 |
| 0.00569 | 0.00685 | 0.00802 | 0.00920 | 0.01039 |
| 0.01158 | 0.01278 | 0.01400 | 0.01522 | 0.01644 |
| 0.01768 | 0.01892 | 0.02017 | 0.02143 | 0.02270 |
| 0.02398 | 0.02526 | 0.02655 | 0.02785 | 0.02916 |
| 0.03048 | 0.03181 | 0.03314 | 0.03448 | 0.03583 |
| 0.03719 | 0.03855 | 0.03991 | 0.04129 | 0.04267 |
| 0.04406 | 0.04546 | 0.04686 | 0.04828 | 0.04970 |
| 0.05113 | 0.05257 | 0.05402 | 0.05547 | 0.05694 |
| 0.05841 | 0.05989 | 0.06138 | 0.06287 | 0.06438 |
| 0.06589 | 0.06741 | 0.06894 | 0.07048 | 0.07202 |
| 0.07358 | 0.07514 | 0.07671 | 0.07828 | 0.07987 |
| 0.08146 | 0.08353 | 0.08562 | 0.08774 | 0.08989 |
| 0.09208 | 0.09429 | 0.09653 | 0.09880 | 0.10110 |
| 0.10343 | 0.10579 | 0.10818 | 0.11060 | 0.11305 |
| 0.11553 | 0.11801 | 0.12052 | 0.12306 | 0.12563 |
| 0.12822 | 0.13085 | 0.13351 | 0.13620 | 0.13892 |
| 0.14166 | 0.14444 | 0.14725 | 0.15008 | 0.15295 |
| 0.15584 | 0.15939 | 0.16307 | 0.16688 | 0.17083 |
| 0.17491 | 0.17913 | 0.18348 | 0.18797 | 0.19259 |
| 0.19734 | 0.20223 | 0.20726 | 0.21242 | 0.21771 |
| 0.22314 | 0.23037 | 0.23799 | 0.24602 | 0.25445 |
| 0.26328 | 0.27359 | 0.28447 | 0.29592 | 0.30795 |
| 0.32054 | 0.34028 | 0.36106 | 0.38855 | 0.42468 |
| 0.48323 | 0.57532 | 0.61145 | 0.63894 | 0.65972 |
| 0.67946 | 0.69205 | 0.70408 | 0.71553 | 0.72641 |
| 0.73672 | 0.74555 | 0.75398 | 0.76201 | 0.76963 |
| 0.77686 | 0.78229 | 0.78758 | 0.79274 | 0.79777 |
| 0.80266 | 0.80741 | 0.81203 | 0.81652 | 0.82087 |
| 0.82509 | 0.82917 | 0.83312 | 0.83693 | 0.84061 |
| 0.84416 | 0.84705 | 0.84992 | 0.85275 | 0.85556 |
| 0.85834 | 0.86108 | 0.86380 | 0.86649 | 0.86915 |
| 0.87178 | 0.87437 | 0.87694 | 0.87948 | 0.88199 |
| 0.88447 | 0.88695 | 0.88940 | 0.89182 | 0.89421 |
| 0.89657 | 0.89890 | 0.90120 | 0.90347 | 0.90571 |
| 0.90792 | 0.91011 | 0.91226 | 0.91438 | 0.91647 |
| 0.91854 | 0.92013 | 0.92172 | 0.92329 | 0.92486 |
| 0.92642 | 0.92798 | 0.92952 | 0.93106 | 0.93259 |
| 0.93411 | 0.93562 | 0.93713 | 0.93862 | 0.94011 |
| 0.94159 | 0.94306 | 0.94453 | 0.94598 | 0.94743 |
| 0.94887 | 0.95030 | 0.95172 | 0.95314 | 0.95454 |
| 0.95594 | 0.95733 | 0.95871 | 0.96009 | 0.96145 |
| 0.96281 | 0.96417 | 0.96552 | 0.96686 | 0.96819 |
| 0.96952 | 0.97084 | 0.97215 | 0.97345 | 0.97474 |
| 0.97602 | 0.97730 | 0.97857 | 0.97983 | 0.98108 |
| 0.98232 | 0.98356 | 0.98478 | 0.98600 | 0.98722 |
| 0.98842 | 0.98961 | 0.99080 | 0.99198 | 0.99315 |
| 0.99431 | 0.99546 | 0.99661 | 0.99775 | 0.99888 |
| 1.0 | | | | |

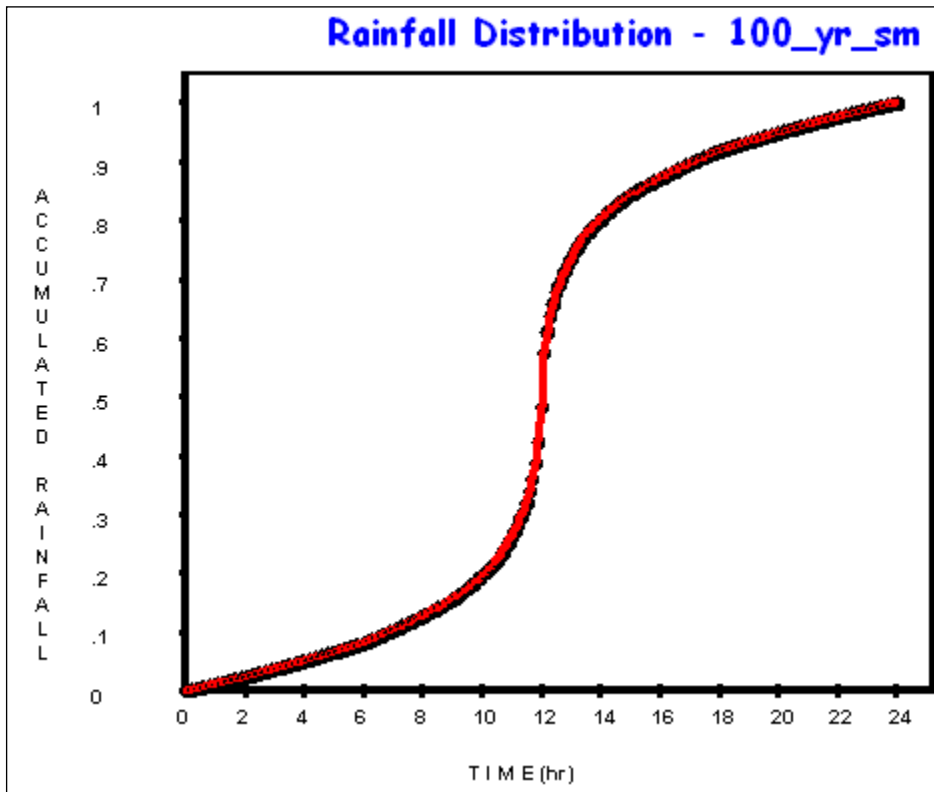


Figure A7-1: Plot of the final 100-year 24-hour storm distribution from WinTR-20.

This procedure is used to develop storm distributions for return periods from 1-year to 500-years. Each distribution may be different because the ratios of the original NOAA Atlas 14 data may vary for each return period. The development of the 24-hour rainfall distribution is explained in NRCS NEH Part 630 Chapter 4 available from the NRCS Hydrology and Hydraulics web site.

Development of the 12-hour storm distribution from the 24-hour storm distribution

The 12-hour distribution is extracted from the 24-hour storm distribution developed in the previous section of Appendix 7. The 12-hour storm distribution represents the 12-hours in the 24-hour distribution from 6 hours to 18 hours.

In the example of the location in Howard County, Maryland described in the 24-hour storm section, the cumulative ratio at 6 hours is 0.08146. The cumulative rainfall ratio at 18 hours is 0.91854. The difference between these ratios is 0.83708. The 12-hour storm distribution cumulative rainfall must begin at 0.0 and end at 1.0, so to calculate the ratio at each time step of 0.1 hour, 0.08146 is subtracted from the cumulative rainfall ratio from the 24-hour storm and the result is divided by 0.83708 to obtain the cumulative ratio at that time step. Two time steps will be used in this example. The rest are computed in a

similar way. At time 6.3 hours (0.3 hours in the 12-hour storm distribution), the 24-hour cumulative ratio is 0.08744. So,

$$\text{Cumulative ratio at 0.3 hour} = (0.08744 - 0.08146) / 0.83708 = 0.0075$$

$$\text{Cumulative ratio at 3.0 hours} = (0.15584 - 0.08146) / 0.83708 = 0.08886$$

The spreadsheet developed to calculate the 12-hour storm distribution automates this process. The WinTR-20 does not have the 12-hour distribution calculation included, so if the 12-hour storm distribution is desired, it should be developed through the spreadsheet and cut and pasted into the WinTR-20 input file using a text editor such as Notepad. A rainfall table header record with RAINFALL DISTRIBUTION: and a second record with an identifier (up to 10 characters) and a time interval in hours need to be placed before the table of numbers. At least one blank record needs to precede the RAINFALL DISTRIBUTION: record and follow the last line of table numbers.

Development of the 6-hour storm distribution from the 24-hour storm distribution

The 6-hour distribution is extracted from the 24-hour storm distribution developed in a previous section of Appendix 7. The 6-hour storm distribution represents the 6-hours in the 24-hour distribution from 9 hours to 15 hours.

In the example of the location in Howard County, Maryland described in the 24-hour storm section, the cumulative ratio at 9 hours is 0.15584. The cumulative rainfall ratio at 15 hours is 0.84416. The difference between these ratios is 0.68832. The 6-hour storm distribution cumulative rainfall must begin at 0.0 and end at 1.0, so to calculate the ratio at each time step of 0.1 hour, 0.15584 is subtracted from the cumulative rainfall ratio from the 24-hour storm and the result is divided by 0.68832 to obtain the cumulative ratio at that time step. Two time steps will be used in this example. The rest are computed in a similar way. At time 10.0 hours (1.0 hour in the 6-hour storm distribution), the 24-hour cumulative ratio is 0.19734. So,

$$\text{Cumulative ratio at 1.0 hour} = (0.19734 - 0.15584) / 0.68832 = 0.06029$$

$$\text{Cumulative ratio at 3.0 hours} = (0.48323 - 0.15584) / 0.68832 = 0.47564$$

The spreadsheet developed to calculate the 6-hour storm distribution automates this process. The WinTR-20 does not have the 6-hour distribution calculation included, so if the 6-hour storm distribution is desired, it should be developed through the spread sheet and cut and pasted into the WinTR-20 input file using a text editor such as Notepad. A rainfall table header record with RAINFALL DISTRIBUTION: and a second record with an identifier (up to 10 characters) and a time interval in hours need to be placed before the table of numbers. At least one blank record needs to precede the RAINFALL DISTRIBUTION: record and follow the last line of table numbers

Blank page inserted to preserve left-right pagination format.

**APPENDIX 8
HISTORICAL SUMMARY OF
REGRESSION EQUATIONS TO PREDICT
FLOOD FLOWS IN MARYLAND**

Historical Summary of Regression Equations to Predict Flood Flows in Maryland

Regression equations have been developed over the years to estimate floods ranging from the 1.25-year event to as great as the 500-year event in the State of Maryland. Below is a summary of these regression equations from 1980 to the present.

Table A8-1: Metadata summary of regression equations documented in this appendix

| Equation ID | Year Published | Last Year of Flood Observation | Soils Data Source | Land Use Source | Limestone Source (see notes) | Comment |
|--|----------------|--------------------------------|---|----------------------|------------------------------|---|
| Carpenter | 1980 | 1977 | unknown | USGS quadrangle maps | N/A | Three regions: Northern Region, Southern Region, Eastern Region |
| Dillow | 1996 | 1990 | Maryland Department of State Planning, 1973 | USGS quadrangle maps | (1) | New regions defined: A, BR, P, WC, EC |
| Moglen et al. L-Moment | 2006 | 1999 | NRCS STATSGO | MOP 2002 | (1) | |
| Moglen et al. ROI | 2006 | 1999 | NRCS STATSGO | MOP 2002 | (1) | Uses 30 closest gages with predictors determined by ungaged outlet region |
| Moglen et al. Fixed Region | 2006 | 1999 | NRCS STATSGO | MOP 2002 | (1) | All regions A, BR, P, WC, EC |
| Thomas | 2007 | 2006 | NRCS SSURGO | MOP 2002 | (1) | New EC only, published in September 2010 report |
| Thomas | 2009 | 2008 | NRCS SSURGO | MOP 2002 | (1) | New WC only, published in September 2010 report |
| Maryland Hydrology Panel (3rd Edition) | 2010 | 1999 | NRCS SSURGO | | (2) | BR and P combined and new P/BR rural developed New P urban developed |
| Thomas and Moglen | 2015 | 2012 | NRCS SSURGO | | (2) | New P/BR, A |

(1) Composite from Berg (1980), Butts and Edmundson (1963), Cardwell (1968), Edwards (1978), Hubbard (1990), Jonas and Stose (1938).

(2) New Limestone developed by Berich/Knaub

The equations in this appendix refer to the five hydrologic regions of the state of Maryland, as shown in Figure A8-1.

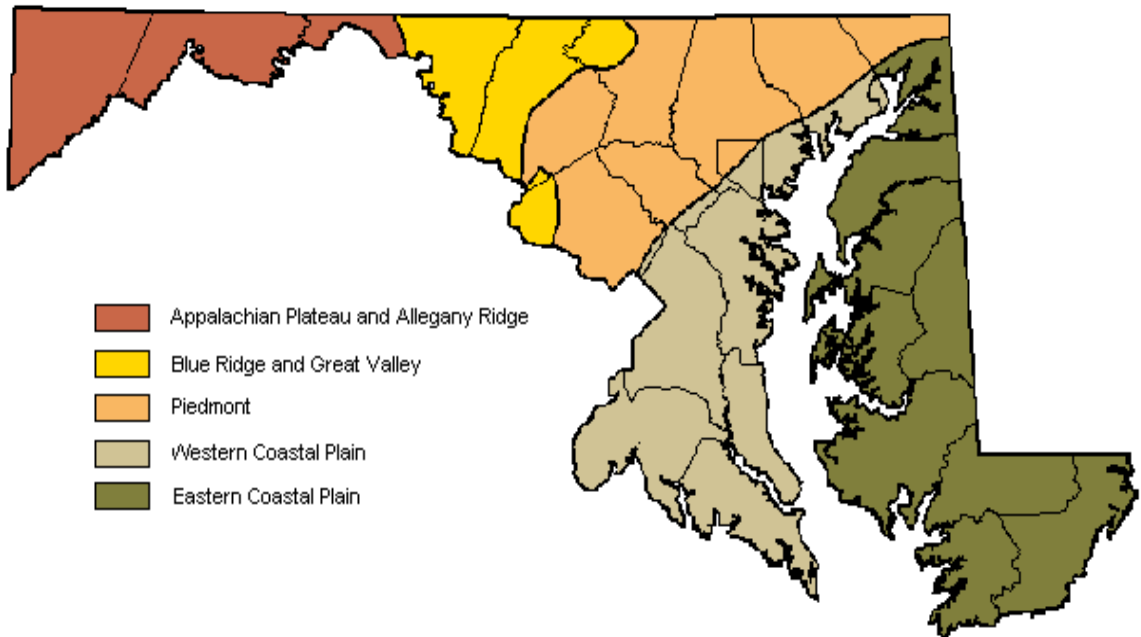


Figure A8-1. Hydrologic regions for Maryland as defined by Dillow (1996).

In the equations appearing below, the following predictor and criterion variable symbols are used:

BR: basin relief, the average elevation of all area within a watershed above the outlet elevation in feet

DA: drainage area in mi^2

FOR: area of watershed covered by forest cover in percent

IA: area of watershed that is impervious as determined using NRCS imperviousness coefficients and the Maryland Department of Planning land use data in percent

LIME: area of watershed underlain by limestone geology in percent

LSLOPE: average land slope calculated on a pixel-by-pixel basis in ft/ft

P₂: 2-year, 24 hour rainfall depth in inches

Q_x: peak discharge for return period, *x* in ft^3/s

RCN: the NRCS runoff curve number in inches^{-1}

S_A: area of watershed in hydrologic soil group A in percent

S_{CD}: area of watershed in hydrologic soil groups C and D in percent

S_D: area of watershed in hydrologic soil group D in percent

SL: main channel slope in ft/mile

ST: area of watershed occupied by lakes, ponds, and swamps in percent

At the top of each grouping of equations, the following headers are used:

EQ: equation number

EY: equivalent years of record

SE: standard error in percent

Carpenter (1980) Equations

Northern Region: (Appalachian/Blue Ridge/Piedmont)

EQ

$$Q_2 = 142 DA^{0.745} (FOR + 10)^{-0.273} P_2^{0.669} \quad (A8.1)$$

$$Q_5 = 120 DA^{0.731} (FOR + 10)^{-0.275} P_2^{1.358} \quad (A8.2)$$

$$Q_{10} = 106 DA^{0.724} (FOR + 10)^{-0.286} P_2^{1.810} \quad (A8.3)$$

$$Q_{25} = 90.1 DA^{0.717} (FOR + 10)^{-0.307} P_2^{2.376} \quad (A8.4)$$

$$Q_{50} = 78.5 DA^{0.712} (FOR + 10)^{-0.323} P_2^{2.793} \quad (A8.5)$$

$$Q_{100} = 66.6 DA^{0.708} (FOR + 10)^{-0.336} P_2^{3.212} \quad (A8.6)$$

- Note: standard error varies from 39 to 49 percent

Southern Region (Western Coastal Plain)

EQ

$$Q_2 = 55.1 DA^{0.672} \quad (A8.7)$$

$$Q_5 = 112 DA^{0.670} \quad (A8.8)$$

$$Q_{10} = 172 DA^{0.667} \quad (A8.9)$$

$$Q_{25} = 280 DA^{0.666} \quad (A8.10)$$

$$Q_{50} = 394 DA^{0.665} \quad (A8.11)$$

$$Q_{100} = 548 DA^{0.662} \quad (A8.12)$$

- Note: standard error varies from 52 to 86 percent

Eastern Region (Eastern Coastal Plain)

EQ

$$Q_2 = 28.6 DA^{0.910} SL^{0.681} (ST + 10)^{-0.148} (FOR + 10)^{-0.647} (S_A + 10)^{-0.309} (S_D + 10)^{0.560} \quad (A8.13)$$

$$Q_5 = 119 DA^{0.989} SL^{0.843} (ST + 10)^{-0.533} (FOR + 10)^{-0.731} (S_A + 10)^{-0.369} (S_D + 10)^{0.577} \quad (A8.14)$$

$$Q_{10} = 306 DA^{1.016} SL^{0.911} (ST + 10)^{-0.820} (FOR + 10)^{-0.804} (S_A + 10)^{-0.367} (S_D + 10)^{0.624} \quad (A8.15)$$

$$Q_{25} = 936 DA^{1.039} SL^{0.974} (ST + 10)^{-1.114} (FOR + 10)^{-0.868} (S_A + 10)^{-0.384} (S_D + 10)^{0.655} \quad (A8.16)$$

$$Q_{50} = 2120 DA^{1.051} SL^{1.009} (ST + 10)^{-1.321} (FOR + 10)^{-0.916} (S_A + 10)^{-0.396} (S_D + 10)^{0.676} \quad (A8.17)$$

$$Q_{100} = 4800 DA^{1.060} SL^{1.035} (ST + 10)^{-1.519} (FOR + 10)^{-0.963} (S_A + 10)^{-0.410} (S_D + 10)^{0.695} \quad (A8.18)$$

- Note: standard error varies from 37 to 40 percent

Dillow (1996) Equations

Appalachian Plateaus and Allegheny Ridges region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_2 = 106DA^{0.851}(FOR+10)^{-0.223}BR^{0.056}$ | 23 | 5 | (A8.19) |
| $Q_5 = 109DA^{0.858}(FOR+10)^{-0.143}BR^{0.064}$ | 20 | 10 | (A8.20) |
| $Q_{10} = 113DA^{0.859}(FOR+10)^{-0.106}BR^{0.072}$ | 19 | 14 | (A8.21) |
| $Q_{25} = 118DA^{0.858}(FOR+10)^{-0.072}BR^{0.087}$ | 21 | 18 | (A8.22) |
| $Q_{50} = 121DA^{0.858}(FOR+10)^{-0.051}BR^{0.099}$ | 22 | 20 | (A8.23) |
| $Q_{100} = 124DA^{0.858}(FOR+10)^{-0.033}BR^{0.111}$ | 25 | 20 | (A8.24) |
| $Q_{500} = 127DA^{0.859}(FOR+10)^{0.004}BR^{0.140}$ | 31 | 19 | (A8.25) |

Blue Ridge and Great Valley region

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_2 = 4,260DA^{0.774}(LIME+10)^{-0.549}BR^{-0.405}$ | 47 | 2 | (A8.26) |
| $Q_5 = 6,670DA^{0.752}(LIME+10)^{-0.564}BR^{-0.354}$ | 41 | 4 | (A8.27) |
| $Q_{10} = 8,740DA^{0.741}(LIME+10)^{-0.579}BR^{-0.326}$ | 37 | 7 | (A8.28) |
| $Q_{25} = 12,000DA^{0.730}(LIME+10)^{-0.602}BR^{-0.295}$ | 35 | 12 | (A8.29) |
| $Q_{50} = 15,100DA^{0.723}(LIME+10)^{-0.620}BR^{-0.276}$ | 34 | 15 | (A8.30) |
| $Q_{100} = 18,900DA^{0.719}(LIME+10)^{-0.639}BR^{-0.261}$ | 34 | 18 | (A8.31) |
| $Q_{500} = 31,800DA^{0.712}(LIME+10)^{-0.686}BR^{-0.241}$ | 37 | 23 | (A8.32) |

Piedmont region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_2 = 451DA^{0.635}(FOR+10)^{-0.266}$ | 38 | 3 | (A8.33) |
| $Q_5 = 839DA^{0.606}(FOR+10)^{-0.248}$ | 34 | 7 | (A8.34) |
| $Q_{10} = 1,210DA^{0.589}(FOR+10)^{-0.242}$ | 33 | 10 | (A8.35) |
| $Q_{25} = 1,820DA^{0.574}(FOR+10)^{-0.239}$ | 34 | 15 | (A8.36) |
| $Q_{50} = 2,390DA^{0.565}(FOR+10)^{-0.240}$ | 36 | 17 | (A8.37) |
| $Q_{100} = 3,060DA^{0.557}(FOR+10)^{-0.241}$ | 39 | 19 | (A8.38) |
| $Q_{500} = 5,190DA^{0.543}(FOR+10)^{-0.245}$ | 48 | 20 | (A8.39) |

Western Coastal Plain region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_2 = 1,410DA^{0.761}(FOR+10)^{-0.782}$ | 50 | 2 | (A8.40) |
| $Q_5 = 1,780DA^{0.769}(FOR+10)^{-0.687}$ | 46 | 4 | (A8.41) |
| $Q_{10} = 1,910DA^{0.771}(FOR+10)^{-0.613}$ | 45 | 7 | (A8.42) |
| $Q_{25} = 2,000DA^{0.772}(FOR+10)^{-0.519}$ | 46 | 10 | (A8.43) |
| $Q_{50} = 2,060DA^{0.771}(FOR+10)^{-0.452}$ | 49 | 12 | (A8.44) |
| $Q_{100} = 2,140DA^{0.770}(FOR+10)^{-0.391}$ | 52 | 13 | (A8.45) |
| $Q_{500} = 2,380DA^{0.765}(FOR+10)^{-0.263}$ | 64 | 14 | (A8.46) |

Eastern Coastal Plain region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_2 = 0.25 DA^{0.591} (RCN-33)^{1.70} BR^{0.310} (FOR+10)^{-0.464} (ST+10)^{-0.148}$ | 42 | 2 | (A8.47) |
| $Q_5 = 1.05 DA^{0.595} (RCN-33)^{1.74} BR^{0.404} (FOR+10)^{-0.586} (ST+10)^{-0.498}$ | 40 | 5 | (A8.48) |
| $Q_{10} = 3.24 DA^{0.597} (RCN-33)^{1.71} BR^{0.436} (FOR+10)^{-0.667} (ST+10)^{-0.694}$ | 39 | 7 | (A8.49) |
| $Q_{25} = 13.1 DA^{0.597} (RCN-33)^{1.66} BR^{0.457} (FOR+10)^{-0.770} (ST+10)^{-0.892}$ | 37 | 12 | (A8.50) |
| $Q_{50} = 35.0 DA^{0.594} (RCN-33)^{1.62} BR^{0.465} (FOR+10)^{-0.847} (ST+10)^{-1.01}$ | 37 | 16 | (A8.51) |
| $Q_{100} = 87.6 DA^{0.589} (RCN-33)^{1.58} BR^{0.470} (FOR+10)^{-0.923} (ST+10)^{-1.11}$ | 36 | 19 | (A8.52) |
| $Q_{500} = 627 DA^{0.573} (RCN-33)^{1.49} BR^{0.478} (FOR+10)^{-1.10} (ST+10)^{-1.29}$ | 36 | 28 | (A8.53) |

Moglen et al. (2006) – Fixed Region Equations

Appalachian Plateaus Region

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_{1.25} = 70.25 DA^{0.837} L_{SLOPE}^{0.327}$ | 23.6 | 5.7 | (A8.54) |
| $Q_{1.50} = 87.42 DA^{0.837} L_{SLOPE}^{0.321}$ | 21.9 | 5.9 | (A8.55) |
| $Q_{1.75} = 96.37 DA^{0.836} L_{SLOPE}^{0.307}$ | 21.2 | 6.4 | (A8.56) |
| $Q_2 = 101.41 DA^{0.834} L_{SLOPE}^{0.300}$ | 20.7 | 7.1 | (A8.57) |
| $Q_5 = 179.13 DA^{0.826} L_{SLOPE}^{0.314}$ | 21.6 | 12 | (A8.58) |
| $Q_{10} = 255.75 DA^{0.821} L_{SLOPE}^{0.340}$ | 24.2 | 14 | (A8.59) |
| $Q_{25} = 404.22 DA^{0.812} L_{SLOPE}^{0.393}$ | 29.1 | 15 | (A8.60) |
| $Q_{50} = 559.80 DA^{0.806} L_{SLOPE}^{0.435}$ | 33.1 | 16 | (A8.61) |
| $Q_{100} = 766.28 DA^{0.799} L_{SLOPE}^{0.478}$ | 37.4 | 15 | (A8.62) |
| $Q_{200} = 1046.9 DA^{0.793} L_{SLOPE}^{0.525}$ | 41.8 | 15 | (A8.63) |
| $Q_{500} = 1565.0 DA^{0.784} L_{SLOPE}^{0.589}$ | 48.0 | 15 | (A8.64) |

Blue Ridge Region

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_{1.25} = 57.39 DA^{0.784} (LIME+1)^{-0.190}$ | 74.6 | 1.0 | (A8.65) |
| $Q_{1.50} = 81.45 DA^{0.764} (LIME+1)^{-0.193}$ | 67.1 | 1.1 | (A8.66) |
| $Q_{1.75} = 96.33 DA^{0.755} (LIME+1)^{-0.194}$ | 65.2 | 1.2 | (A8.67) |
| $Q_2 = 107.20 DA^{0.750} (LIME+1)^{-0.194}$ | 64.0 | 1.3 | (A8.68) |
| $Q_5 = 221.28 DA^{0.710} (LIME+1)^{-0.202}$ | 55.4 | 3.0 | (A8.69) |
| $Q_{10} = 336.84 DA^{0.687} (LIME+1)^{-0.207}$ | 52.5 | 4.9 | (A8.70) |
| $Q_{25} = 545.62 DA^{0.660} (LIME+1)^{-0.214}$ | 51.6 | 8.8 | (A8.71) |
| $Q_{50} = 759.45 DA^{0.641} (LIME+1)^{-0.219}$ | 52.5 | 9.7 | (A8.72) |
| $Q_{100} = 1034.7 DA^{0.624} (LIME+1)^{-0.224}$ | 54.4 | 11 | (A8.73) |
| $Q_{200} = 1387.6 DA^{0.608} (LIME+1)^{-0.229}$ | 57.4 | 13 | (A8.74) |
| $Q_{500} = 2008.6 DA^{0.587} (LIME+1)^{-0.235}$ | 62.3 | 13 | (A8.75) |

Piedmont Region: Rural

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 202.9 DA^{0.682} (FOR+1)^{-0.222}$ | 39.0 | 3.3 | (A8.76) |
| $Q_{1.50} = 262.0 DA^{0.683} (FOR+1)^{-0.217}$ | 33.8 | 3.8 | (A8.77) |
| $Q_{1.75} = 308.9 DA^{0.679} (FOR+1)^{-0.219}$ | 32.1 | 4.3 | (A8.78) |
| $Q_2 = 349.0 DA^{0.674} (FOR+1)^{-0.224}$ | 31.3 | 4.8 | (A8.79) |
| $Q_5 = 673.8 DA^{0.659} (FOR+1)^{-0.228}$ | 25.6 | 14 | (A8.80) |
| $Q_{10} = 992.6 DA^{0.649} (FOR+1)^{-0.230}$ | 24.3 | 23 | (A8.81) |
| $Q_{25} = 1556 DA^{0.635} (FOR+1)^{-0.231}$ | 25.3 | 33 | (A8.82) |
| $Q_{50} = 2146 DA^{0.624} (FOR+1)^{-0.235}$ | 27.5 | 37 | (A8.83) |
| $Q_{100} = 2897 DA^{0.613} (FOR+1)^{-0.238}$ | 30.6 | 37 | (A8.84) |
| $Q_{200} = 3847 DA^{0.603} (FOR+1)^{-0.239}$ | 34.2 | 37 | (A8.85) |
| $Q_{500} = 5519 DA^{0.589} (FOR+1)^{-0.242}$ | 39.7 | 35 | (A8.86) |

Piedmont Region: Urban

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 17.85 DA^{0.652} (IA+1)^{0.635}$ | 41.7 | 3.3 | (A8.87) |
| $Q_{1.50} = 24.66 DA^{0.648} (IA+1)^{0.631}$ | 36.9 | 3.8 | (A8.88) |
| $Q_{1.75} = 30.82 DA^{0.643} (IA+1)^{0.611}$ | 35.6 | 4.1 | (A8.89) |
| $Q_2 = 37.01 DA^{0.635} (IA+1)^{0.588}$ | 35.1 | 4.5 | (A8.90) |
| $Q_5 = 94.76 DA^{0.624} (IA+1)^{0.499}$ | 28.5 | 13 | (A8.91) |
| $Q_{10} = 169.2 DA^{0.622} (IA+1)^{0.435}$ | 26.2 | 24 | (A8.92) |
| $Q_{25} = 341.0 DA^{0.619} (IA+1)^{0.349}$ | 26.0 | 38 | (A8.93) |
| $Q_{50} = 562.4 DA^{0.619} (IA+1)^{0.284}$ | 27.7 | 44 | (A8.94) |
| $Q_{100} = 898.3 DA^{0.619} (IA+1)^{0.222}$ | 30.7 | 45 | (A8.95) |
| $Q_{200} = 1413 DA^{0.621} (IA+1)^{0.160}$ | 34.8 | 44 | (A8.96) |
| $Q_{500} = 2529 DA^{0.623} (IA+1)^{0.079}$ | 41.2 | 40 | (A8.97) |

Western Coastal Plain Region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 18.62 DA^{0.611} (IA+1)^{0.419} (S_D+1)^{0.165}$ | 38.9 | 3.2 | (A8.98) |
| $Q_{1.50} = 21.97 DA^{0.612} (IA+1)^{0.399} (S_D+1)^{0.226}$ | 36.3 | 3.2 | (A8.99) |
| $Q_{1.75} = 24.42 DA^{0.612} (IA+1)^{0.391} (S_D+1)^{0.246}$ | 35.6 | 3.4 | (A8.100) |
| $Q_2 = 26.32 DA^{0.612} (IA+1)^{0.386} (S_D+1)^{0.256}$ | 35.4 | 3.7 | (A8.101) |
| $Q_5 = 42.64 DA^{0.607} (IA+1)^{0.347} (S_D+1)^{0.340}$ | 36.3 | 6.8 | (A8.102) |
| $Q_{10} = 58.04 DA^{0.603} (IA+1)^{0.323} (S_D+1)^{0.382}$ | 40.6 | 8.4 | (A8.103) |
| $Q_{25} = 86.25 DA^{0.582} (IA+1)^{0.295} (S_D+1)^{0.421}$ | 48.9 | 9.3 | (A8.104) |
| $Q_{50} = 111.50 DA^{0.584} (IA+1)^{0.270} (S_D+1)^{0.457}$ | 54.7 | 9.9 | (A8.105) |
| $Q_{100} = 143.56 DA^{0.586} (IA+1)^{0.260} (S_D+1)^{0.469}$ | 65.7 | 9.0 | (A8.106) |
| $Q_{200} = 185.15 DA^{0.580} (IA+1)^{0.243} (S_D+1)^{0.488}$ | 75.5 | 8.7 | (A8.107) |
| $Q_{500} = 256.02 DA^{0.573} (IA+1)^{0.222} (S_D+1)^{0.510}$ | 89.8 | 8.3 | (A8.108) |

Eastern Coastal Plain Region

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_{1.25} = 19.85 DA^{0.796} BR^{0.066} (S_A+1)^{-0.106}$ | 34.2 | 4.5 | (A8.109) |
| $Q_{1.50} = 20.48 DA^{0.795} BR^{0.156} (S_A+1)^{-0.140}$ | 33.7 | 4.1 | (A8.110) |
| $Q_{1.75} = 20.81 DA^{0.799} BR^{0.197} (S_A+1)^{-0.146}$ | 34.2 | 4.1 | (A8.111) |
| $Q_2 = 20.95 DA^{0.803} BR^{0.222} (S_A+1)^{-0.144}$ | 34.9 | 4.1 | (A8.112) |
| $Q_5 = 25.82 DA^{0.793} BR^{0.368} (S_A+1)^{-0.190}$ | 36.9 | 6.8 | (A8.113) |
| $Q_{10} = 31.17 DA^{0.777} BR^{0.439} (S_A+1)^{-0.215}$ | 38.2 | 9.5 | (A8.114) |
| $Q_{25} = 40.26 DA^{0.751} BR^{0.511} (S_A+1)^{-0.242}$ | 40.0 | 13 | (A8.115) |
| $Q_{50} = 50.00 DA^{0.732} BR^{0.549} (S_A+1)^{-0.261}$ | 41.7 | 16 | (A8.116) |
| $Q_{100} = 63.44 DA^{0.711} BR^{0.576} (S_A+1)^{-0.279}$ | 44.0 | 18 | (A8.117) |
| $Q_{200} = 79.81 DA^{0.689} BR^{0.601} (S_A+1)^{-0.296}$ | 46.5 | 19 | (A8.118) |
| $Q_{500} = 108.7 DA^{0.660} BR^{0.628} (S_A+1)^{-0.316}$ | 50.8 | 21 | (A8.119) |

Moglen et al. (2006) – L-Moment Equations

Using codes published by Wallis and Hosking, (1998), five homogeneous regions over the State of Maryland were determined that corresponded well with the framework established previously by Dillow (1996). These regions are: Appalachian, Blue Ridge / Piedmont (<20 mi²), Blue Ridge / Piedmont (> 20 mi²), Western Coastal Plain, and Eastern Coastal Plain. These regions agree well with those established by Dillow with the difference being the merger of the Blue Ridge and Piedmont provinces but with this merged province divided based on whether the drainage area is greater or less than 20 mi².

The output from the L-moment methods is an equation for determining the L-mean and a set of quantiles that correspond to the various return periods one may wish to estimate a flood discharge for. This is basically an index flood procedure in which the discharge for any given return period is the product of the L-mean determined for that watershed (A8.nd region) and the quantile for the return period and region.

The equations for the L-means for each region are given below in equations 38-42. Table A8.2 provides the corresponding quantiles for each region.

Table A8-2: Quantiles for L-moment method by region and return period

| Region | Return Period | | | | | | | | | | |
|--|---------------|------|------|------|------|------|------|------|------|------|-------|
| | 1.25 | 1.50 | 1.75 | 2 | 5 | 10 | 25 | 50 | 100 | 200 | 500 |
| Appalachian | 0.55 | 0.67 | 0.76 | 0.83 | 1.31 | 1.70 | 2.32 | 2.89 | 3.55 | 4.34 | 5.61 |
| Piedmont/Blue Ridge < 20 mi ² | 0.36 | 0.49 | 0.60 | 0.69 | 1.34 | 1.96 | 3.03 | 4.12 | 5.52 | 7.34 | 10.60 |
| Piedmont/Blue Ridge > 20 mi ² | 0.48 | 0.61 | 0.70 | 0.78 | 1.32 | 1.80 | 2.58 | 3.33 | 4.26 | 5.4 | 7.32 |
| Western Coastal Plain | 0.40 | 0.53 | 0.62 | 0.70 | 1.30 | 1.88 | 2.90 | 3.95 | 5.33 | 7.14 | 10.43 |
| Eastern Coastal Plain | 0.45 | 0.60 | 0.71 | 0.80 | 1.38 | 1.86 | 2.60 | 3.26 | 4.03 | 4.93 | 6.37 |

EQ

For the Appalachian Region:

$$L_A = 18.4606 \cdot (DA)^{0.8234} \cdot (S_C + 10)^{0.3186} \quad (\text{A8.120})$$

For the Blue Ridge / Piedmont Region less than 20 mi²:

$$L_{BR-P<20} = 1551.203 \cdot (DA)^{0.5202} \cdot (LIME + 10)^{-0.7158} \quad (\text{A8.121})$$

For the Blue Ridge / Piedmont Region more than 20 mi²:

$$L_{BR-P>20} = 1035.085 \cdot (DA)^{0.6489} \cdot (LIME + 10)^{-0.6525} \quad (\text{A8.122})$$

For the Western Coastal Plain Region:

$$L_W = 0.0107 \cdot (BR)^{1.9} \cdot (S_D + 10)^{0.7446} \quad (\text{A8.123})$$

For the Eastern Coastal Plain Region:

$$L_E = 3.5742 \cdot (DA)^{0.6189} \cdot (BR)^{0.9183} \quad (\text{A8.124})$$

Moglen et al. (2006) – Region of Influence Equations

The concept behind the Region of Influence (ROI) method is to develop regression models based on the flood frequency information of the n most similar gaged sites to the ungaged watershed in question. Regression models are thus unique to every ungaged location. Similarity is asserted by examining such watershed properties as those that appeared in the earlier section on determining watershed properties. The ROI method uses as input the ungaged watershed properties and then determines a “distance” function that reflects the similarity of the ungaged site to all gaged sites in the database. The n gaged sites that are the most similar (i.e. have the smallest “distance”) to the ungaged site are used to develop a multiple-predictor power law regression model for each return period from 2 to 500 years.

To determine the best predictors to use in this method, two-, three-, and four-parameter models were examined with the smallest standard errors associated with the higher parameter models. Testing of models was performed by treating the data from each gage as if it were an ungaged location and then using the remaining gages to predict the flood frequency distribution at this gage. Gages were grouped according to the physiographic provinces identified by Dillow (1996). The standard error within each physiographic province was then calculated using the Bulletin 17b discharges at each gage as the “observed” discharges and the ROI determined regression equations as the “predicted” discharges.

The original ROI code was obtained from Gary Tasker at the USGS for the State of North Carolina and was modified to work for the State of Maryland. The original code set n (the number of most similar gages used to develop a regression equation) at 30. A small analysis confirmed that $n = 30$ produced the smallest standard errors representing the tradeoff between gaining more information from larger sample sizes and having that information be of lower quality because it corresponds to less similar gages.

**Table A8-3: Best predictors for Region of Influence Method –
by geographic province**

| Physiographic Province | Predictor 1 | Predictor 2 | Predictor 3 | Predictor 4 |
|-------------------------------|--------------------|--------------------|------------------------|------------------------|
| Appalachian | Drainage area | Basin relief | A soils | Forest cover (1985) |
| Blue Ridge* | Drainage area | Limestone | Forest cover (1985) | Impervious area (1985) |
| Piedmont* | Drainage area | Limestone | Forest cover (1985) | Impevious area (1985) |
| Western Coastal Plain | Drainage area | Land slope | Impervious area (1990) | D soils |
| Eastern Coastal Plain | Drainage area | Basin relief | A soils | Forest Cover (1985) |

Model development was a lengthy undertaking, proceeding largely by a trial-and-error process. The models that were examined all included drainage area as a predictor by default. The remaining predictors were allowed to vary although it was expected that a blend of predictors reflecting structural properties of the watershed (e.g. relief, soil type) and dynamic properties of the watershed (e.g. forest cover, imperviousness) would ultimately produce the best regression models. Ultimately, after trying a great number of potential models, we found that the most effective watershed predictors were drainage area, land slope, basin relief, percent imperviousness, and forest cover. Table 1 below shows the precise best predictive models found, grouped by physiographic province.

The reader will note that Table 1 indicates that the models that were ultimately found to produce the smallest standard errors also contained highly correlated predictors (e.g. [land slope and basin relief] or [impervious area and forest cover]). These correlated predictors resulted in regression models with irrational exponents (e.g. a negative exponent on land slope or basin relief). We subsequently searched for the best regression model with more independent predictors. The resulting best four predictor model was found to be dependent on drainage area, basin relief, percent imperviousness, and percent hydrologic soil group D. The exponents associated with this model were rational in sign and were rational in their trends with increasing return period (e.g. the exponent on percent imperviousness decreases as return period increases.) Although there is a small sacrifice in the magnitude of the standard errors during the calibration step using this new model, we feel the rationality of the exponents is ultimately more important when using these equations to make predictions at unaged sites.

The asterisk (*) next to the Blue Ridge and Piedmont regions indicates a slight difference in treatment of the Region of Influence methods for these two regions with regards to the limestone predictor. The presence of an underlying limestone geology in these areas has been found by others to be significant for both low flows (Carpenter and Hayes, 1996) and for floods (Dillow, 1996). For the two indicated regions, the limestone predictor was handled as follows. If the percent limestone was greater than zero, then all four predictors were used. If no limestone was present then the initial set of calibrated models did not include limestone as a predictor.

A final wrinkle we added beyond the standard region of influence method was a test for rationality of all exponents in the calibrated regression equations. If an irrational exponent (e.g. a negative exponent on land slope or a positive exponent on forest cover) was determined for any predictor for any return period, that predictor was removed from the set of predictors and the region of influence method was repeated with the reduced predictor set. For the calibration of a set of equations for a given region, this process was repeated, starting with the four predictors indicated in Table 1 until all calibrated exponents were rational for all return periods.

Maryland Hydrology Panel (2010) Equations

The GIS representation of limestone up to the year 2010 had been a digitized and georeferenced representation of the limestone geology layer published in Dillow's (1996) report. The Maryland Hydrology Panel was aware of other limestone geology extending into the Maryland Piedmont region that was not represented in this layer. Further, limestone had not previously been examined as a potential predictor variable in the Piedmont region. The Maryland Hydrology Panel undertook an extensive analysis to determine if the limestone representation used for predicting flood behavior could be revised resulting in improved predictive capabilities of the resulting regression equations.

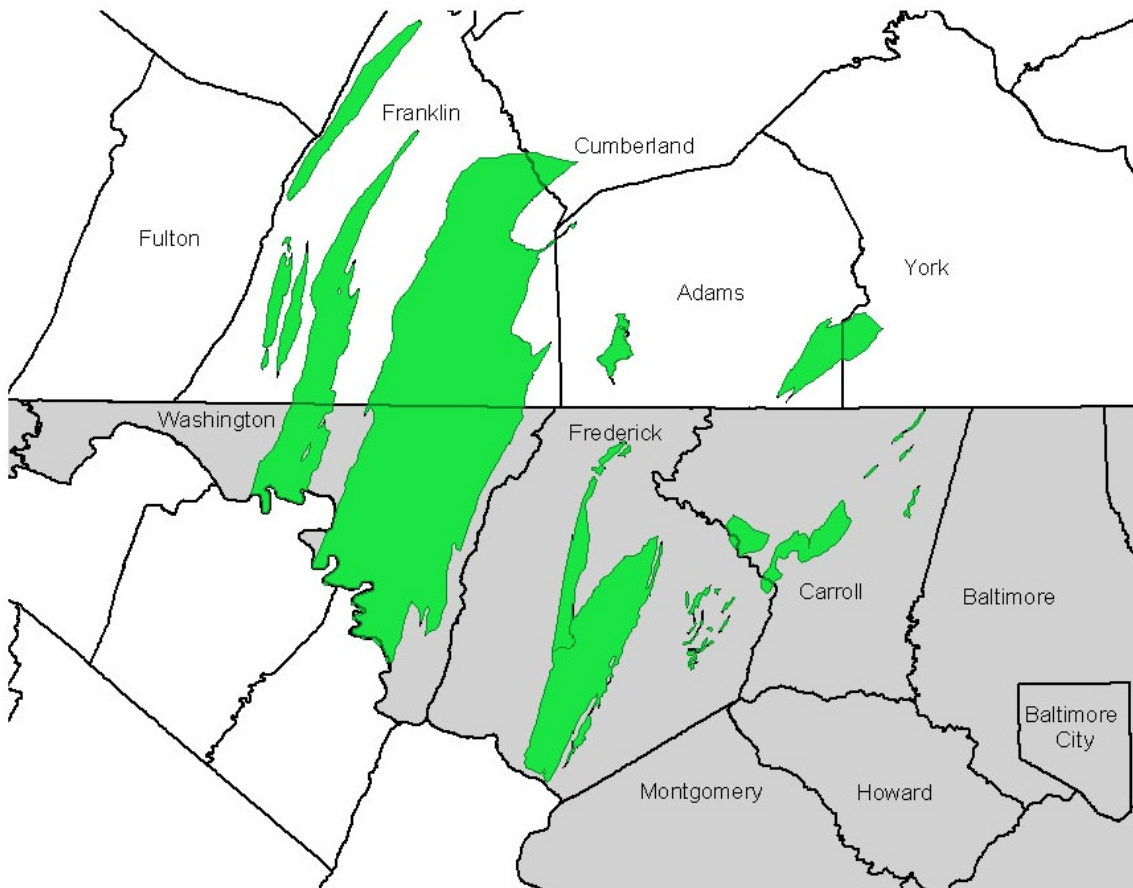


Figure A8-2: Green areas are underlain by limestone geology used in 2010 and more recent equations.

Maryland Hydrology Panel (2010) Equations (continued)

Piedmont/Blue Ridge Region: Rural

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_{1.25} = 287.1 DA^{0.774} (LIME+1)^{-0.118} (FOR+1)^{-0.418}$ | 42.1 | 2.8 | (A8.124) |
| $Q_{1.50} = 327.3 DA^{0.758} (LIME+1)^{-0.121} (FOR+1)^{-0.358}$ | 37.6 | 3.1 | (A8.125) |
| $Q_2 = 396.9 DA^{0.743} (LIME+1)^{-0.124} (FOR+1)^{-0.332}$ | 35.6 | 3.7 | (A8.126) |
| $Q_5 = 592.5 DA^{0.705} (LIME+1)^{-0.133} (FOR+1)^{-0.237}$ | 31.4 | 9.0 | (A8.127) |
| $Q_{10} = 751.1 DA^{0.682} (LIME+1)^{-0.138} (FOR+1)^{-0.183}$ | 30.9 | 14 | (A8.128) |
| $Q_{25} = 996.0 DA^{0.655} (LIME+1)^{-0.145} (FOR+1)^{-0.122}$ | 32.2 | 20 | (A8.129) |
| $Q_{50} = 1,218.8 DA^{0.635} (LIME+1)^{-0.150} (FOR+1)^{-0.082}$ | 34.5 | 23 | (A8.130) |
| $Q_{100} = 1,471.1 DA^{0.617} (LIME+1)^{-0.154} (FOR+1)^{-0.045}$ | 37.5 | 24 | (A8.131) |
| $Q_{200} = 1,760.7 DA^{0.600} (LIME+1)^{-0.159} (FOR+1)^{-0.009}$ | 41.0 | 25 | (A8.132) |
| $Q_{500} = 2,215.4 DA^{0.577} (LIME+1)^{-0.165} (FOR+1)^{0.035}$ | 46.3 | 25 | (A8.133) |

Piedmont Region: Urban

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 17.85 DA^{0.652} (IA+1)^{0.635}$ | 41.7 | 3.3 | (A8.134) |
| $Q_{1.50} = 24.66 DA^{0.648} (IA+1)^{0.631}$ | 36.9 | 3.8 | (A8.135) |
| $Q_2 = 37.01 DA^{0.635} (IA+1)^{0.588}$ | 35.1 | 4.5 | (A8.136) |
| $Q_5 = 94.76 DA^{0.624} (IA+1)^{0.499}$ | 28.5 | 13 | (A8.137) |
| $Q_{10} = 169.2 DA^{0.622} (IA+1)^{0.435}$ | 26.2 | 24 | (A8.138) |
| $Q_{25} = 341.0 DA^{0.619} (IA+1)^{0.349}$ | 26.0 | 38 | (A8.139) |
| $Q_{50} = 562.4 DA^{0.619} (IA+1)^{0.284}$ | 27.7 | 44 | (A8.140) |
| $Q_{100} = 898.3 DA^{0.619} (IA+1)^{0.222}$ | 30.7 | 45 | (A8.141) |
| $Q_{200} = 1,413 DA^{0.621} (IA+1)^{0.160}$ | 34.8 | 44 | (A8.142) |
| $Q_{500} = 2,529 DA^{0.623} (IA+1)^{0.079}$ | 41.2 | 40 | (A8.143) |

Western Coastal Plains Region

| | SE | EY | EQ |
|---|-----------|-----------|-----------|
| $Q_{1.25} = 5.18 DA^{0.694} (IA+1)^{0.382} (SCD+1)^{0.414}$ | 39.0 | 3.6 | (A8.144) |
| $Q_{1.50} = 6.73 DA^{0.682} (IA+1)^{0.374} (SCD+1)^{0.429}$ | 36.4 | 3.6 | (A8.145) |
| $Q_2 = 7.61 DA^{0.678} (IA+1)^{0.362} (SCD+1)^{0.475}$ | 33.2 | 4.6 | (A8.146) |
| $Q_5 = 10.5 DA^{0.665} (IA+1)^{0.290} (SCD+1)^{0.612}$ | 38.2 | 6.7 | (A8.147) |
| $Q_{10} = 13.1 DA^{0.653} (IA+1)^{0.270} (SCD+1)^{0.669}$ | 42.7 | 8.2 | (A8.148) |
| $Q_{25} = 17.5 DA^{0.634} (IA+1)^{0.264} (SCD+1)^{0.719}$ | 48.1 | 10 | (A8.149) |
| $Q_{50} = 21.2 DA^{0.621} (IA+1)^{0.263} (SCD+1)^{0.751}$ | 54.0 | 11 | (A8.150) |
| $Q_{100} = 25.6 DA^{0.608} (IA+1)^{0.262} (SCD+1)^{0.781}$ | 61.2 | 11 | (A8.151) |
| $Q_{200} = 30.5 DA^{0.596} (IA+1)^{0.261} (SCD+1)^{0.812}$ | 69.6 | 10 | (A8.152) |
| $Q_{500} = 37.9 DA^{0.579} (IA+1)^{0.261} (SCD+1)^{0.849}$ | 82.5 | 10 | (A8.153) |

Eastern Coastal Plains Region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 24.44 DA^{0.815} (S_A+1)^{-0.139} L_{SLOPE}^{0.115}$ | 32.4 | 4.6 | (A8.154) |
| $Q_{1.50} = 32.14 DA^{0.824} (S_A+1)^{-0.144} L_{SLOPE}^{0.194}$ | 32.3 | 4.1 | (A8.155) |
| $Q_2 = 42.48 DA^{0.836} (S_A+1)^{-0.158} L_{SLOPE}^{0.249}$ | 32.8 | 4.4 | (A8.156) |
| $Q_5 = 81.20 DA^{0.847} (S_A+1)^{-0.184} L_{SLOPE}^{0.385}$ | 35.1 | 7.0 | (A8.157) |
| $Q_{10} = 119.3 DA^{0.844} (S_A+1)^{-0.196} L_{SLOPE}^{0.445}$ | 36.7 | 9.7 | (A8.158) |
| $Q_{25} = 186.7 DA^{0.834} (S_A+1)^{-0.212} L_{SLOPE}^{0.499}$ | 39.3 | 13 | (A8.159) |
| $Q_{50} = 254.7 DA^{0.824} (S_A+1)^{-0.222} L_{SLOPE}^{0.531}$ | 41.6 | 15 | (A8.160) |
| $Q_{100} = 340.4 DA^{0.812} (S_A+1)^{-0.230} L_{SLOPE}^{0.557}$ | 44.2 | 17 | (A8.161) |
| $Q_{200} = 450.5 DA^{0.800} (S_A+1)^{-0.237} L_{SLOPE}^{0.582}$ | 47.2 | 18 | (A8.162) |
| $Q_{500} = 638.7 DA^{0.783} (S_A+1)^{-0.247} L_{SLOPE}^{0.610}$ | 51.6 | 19 | (A8.163) |

Thomas and Moglen (2015) Equations

Piedmont/Blue Ridge Region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 283.3 DA^{0.724} (LIME+1)^{-0.124} (IA+1)^{0.143} (FOR+1)^{-0.412}$ | 44.3 | 2.8 | (A8.164) |
| $Q_{1.50} = 352.4 DA^{0.704} (LIME+1)^{-0.131} (IA+1)^{0.123} (FOR+1)^{-0.373}$ | 40.9 | 3.2 | (A8.165) |
| $Q_2 = 453.4 DA^{0.683} (LIME+1)^{-0.140} (IA+1)^{0.105} (FOR+1)^{-0.334}$ | 37.5 | 3.7 | (A8.166) |
| $Q_5 = 746.8 DA^{0.640} (LIME+1)^{-0.158} (IA+1)^{0.083} (FOR+1)^{-0.249}$ | 31.9 | 9.2 | (A8.167) |
| $Q_{10} = 972.3 DA^{0.615} (LIME+1)^{-0.169} (IA+1)^{0.076} (FOR+1)^{-0.195}$ | 29.6 | 16 | (A8.168) |
| $Q_{25} = 1,327.6 DA^{0.593} (LIME+1)^{-0.182} (IA+1)^{0.074} (FOR+1)^{-0.145}$ | 29.0 | 25 | (A8.169) |
| $Q_{50} = 1,608.2 DA^{0.576} (LIME+1)^{-0.191} (IA+1)^{0.073} (FOR+1)^{-0.103}$ | 29.8 | 31 | (A8.170) |
| $Q_{100} = 1,928.5 DA^{0.561} (LIME+1)^{-0.198} (IA+1)^{0.073} (FOR+1)^{-0.067}$ | 31.8 | 34 | (A8.171) |
| $Q_{200} = 3,153.5 DA^{0.550} (LIME+1)^{-0.222} (FOR+1)^{-0.090}$ | 35.7 | 32 | (A8.172) |
| $Q_{500} = 3,905.3 DA^{0.533} (LIME+1)^{-0.233} (FOR+1)^{-0.045}$ | 42.0 | 30 | (A8.173) |

Appalachian Plateau Region

| | SE | EY | EQ |
|--|-----------|-----------|-----------|
| $Q_{1.25} = 71.0 DA^{0.848} L_{SLOPE}^{0.342}$ | 30.9 | 1.2 | (A8.174) |
| $Q_{1.50} = 86.3 DA^{0.837} L_{SLOPE}^{0.312}$ | 23.3 | 3.7 | (A8.175) |
| $Q_2 = 112.7 DA^{0.829} L_{SLOPE}^{0.319}$ | 21.1 | 6.6 | (A8.176) |
| $Q_5 = 199.1 DA^{0.813} L_{SLOPE}^{0.339}$ | 21.1 | 11 | (A8.177) |
| $Q_{10} = 272.2 DA^{0.801} L_{SLOPE}^{0.338}$ | 24.5 | 12 | (A8.178) |
| $Q_{25} = 416.9 DA^{0.794} L_{SLOPE}^{0.380}$ | 27.9 | 14 | (A8.179) |
| $Q_{50} = 570.5 DA^{0.790} L_{SLOPE}^{0.422}$ | 32.5 | 14 | (A8.180) |
| $Q_{100} = 722.0 DA^{0.783} L_{SLOPE}^{0.429}$ | 37.1 | 13 | (A8.181) |
| $Q_{200} = 914.5 DA^{0.777} L_{SLOPE}^{0.445}$ | 42.6 | 12 | (A8.182) |
| $Q_{500} = 1,174.3 DA^{0.768} L_{SLOPE}^{0.437}$ | 49.8 | 11 | (A8.183) |

**APPENDIX 9
LINKS TO WEBSITES WITH
HYDROLOGIC RESOURCES
AND PROGRAMS**

| Site Name | Website Link | Information |
|--|---|---|
| University of Maryland GISHydro | http://www.gishydro.eng.umd.edu | Download software and references for GISHydroNEXT and GISHydro2000 |
| NRCS Water Quality and Quantity Technology Development Team | http://go.usa.gov/KoZ | Download NRCS software and technical references: TR-55, TR-20 |
| US Army Corps of Engineers – Hydrologic Engineering Center | http://www.hec.usace.army.mil | Download software and references: HEC-RAS, HEC-HMS |
| USGS Water Resources – Surface Water Data | http://waterdata.usgs.gov/nwis/sw | Stream gage data and statistics |
| USGS Water Resources – MD, DE, DC | http://md.water.usgs.gov/ http://water.usgs.gov/md/nwis/sw | Stream gage data and statistics for MD, DE, and DC. |
| USGS Water Resources – Maps and GIS DataMaps | http://water.usgs.gov/maps.html | Stream gage data and watershed characteristics, GIS format |
| FHWA Hydraulics Engineering | www.fhwa.dot.gov/engineering/hydraulics/ | Hydraulic Engineering Circulars and other references |
| Maryland State Data Center | http://planning.maryland.gov/msdc/home.shtml | Comprehensive plan references and maps |
| Maryland Department of the Environment – Water Programs | http://www.mde.state.md.us/programs/Water/StormwaterManagementProgram/SedimentandStormwaterHome/Pages/Programs/WaterPrograms/sedimentandstormwater/home/index.aspx | References for Stormwater Management, Flood Hazard Mitigation, Water Quality |
| Maryland Department of Natural Resources – Guide to Finding DNR Publications | http://www.dnr.state.md.us/irc/publications.html | References and publications |
| U.S. Fish and Wildlife Service, Chesapeake Bay Office – Stream Survey Publications | Coastal Plain: https://www.fws.gov/chesapeakebay/pdf/plain.pdf Piedmont: https://www.fws.gov/chesapeakebay/pdf/piedmont.pdf Allegheny Plateau/Valley and Ridge: https://www.fws.gov/chesapeakebay/pdf/plateau.pdf | Maryland stream hydraulic geometry |
| NRCS Geospatial Data Gateway | http://datagateway.nrcs.usda.gov/ | GIS data products including DEMs, land use, stream line work, HUC boundaries, and soil types. |
| Maryland State Highway Administration | http://www.sha.state.md.us | MSHA references and downloads |

**Maryland Hydrology Panel
July 2016**